


PARAMETERS

ITEM NO	SPEC	FREQUENCY RANGE	INSERTION LOSS (dB)	ISOLATION (dB)	RETURN LOSS (dB)
VSP-2404	5-3000MHZ	5-47MHZ	-9.5 dB	-16dB	-8dB
		470-1250MHZ	-10.5dB	-18dB	-8dB
		1250-2150MHZ	-12dB	-16dB	-8dB
		2150-3000MHZ	-13.5dB	-18dB	-8dB

PARAMETERS

NO	Product introduction
1	Zinc alloy die casting products.
2	Surface using tin plating
3	The back cover with tin seal to seal
4	Inch thread F head
5	To fix the main body on both sides
6	achieve superior sealing and anti disturbance ability
7	The internal use of superior circuit design
8	Red indicate the current through

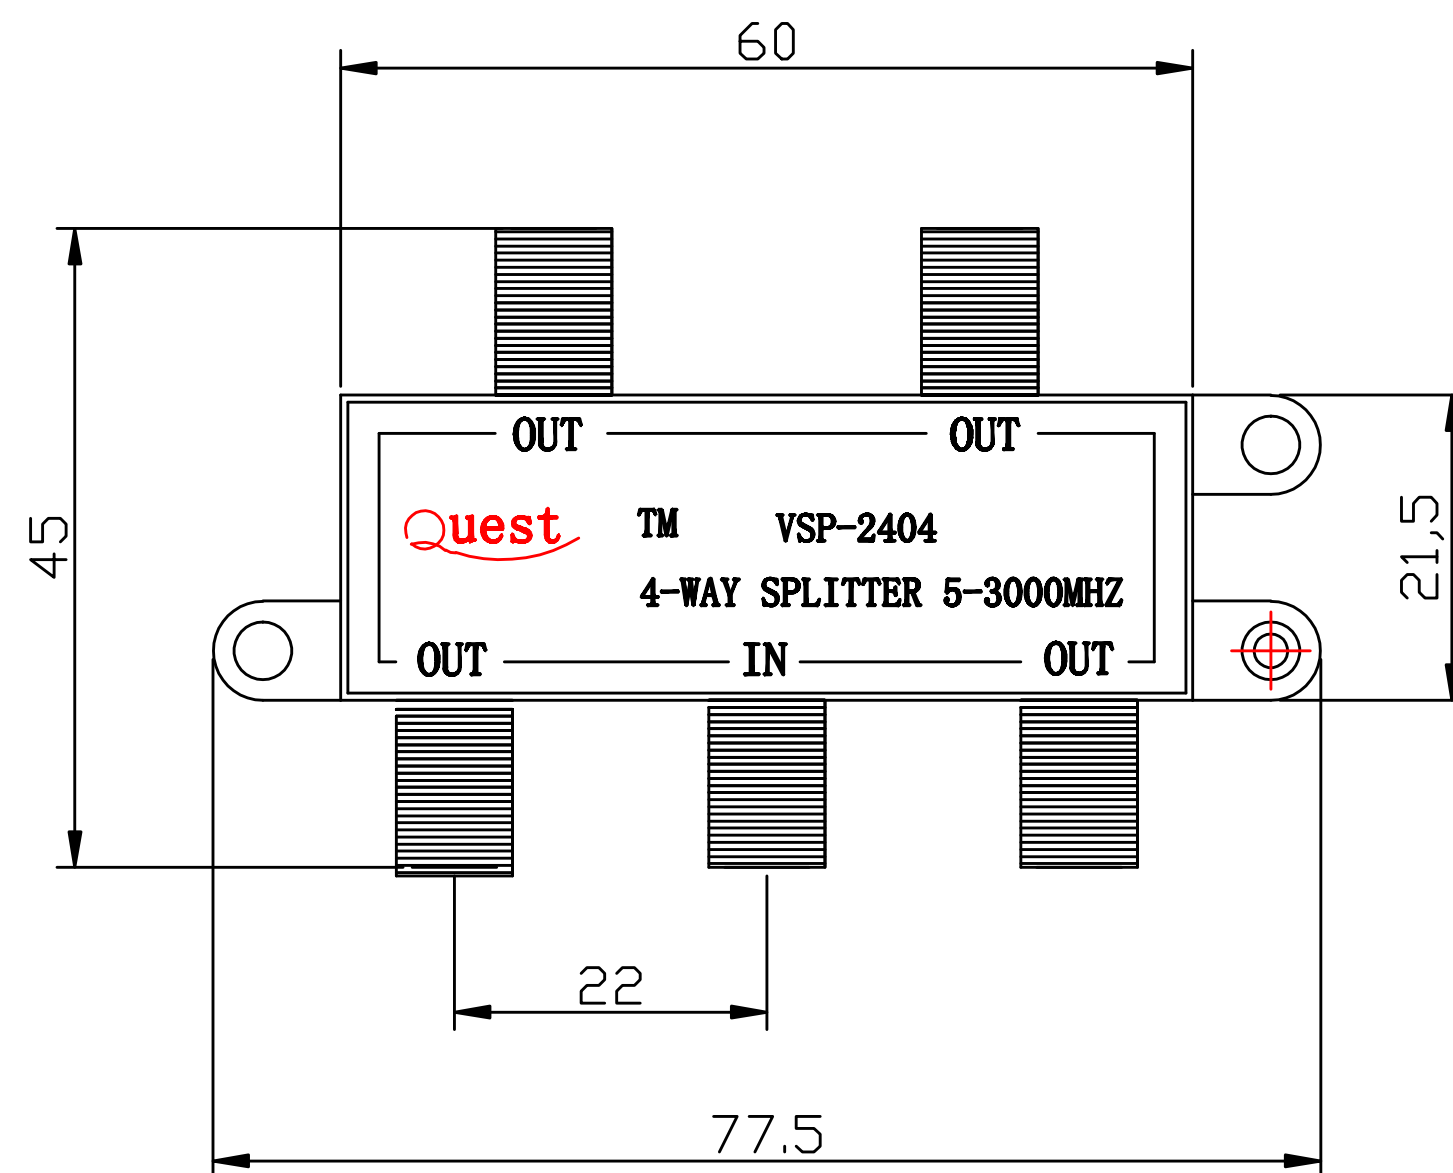

Quest Technology Int'l, Inc.
11200 NW 138th St., Medley, FL 33178
Tel: 305-513-8583 Fax: 305-513-9675
www.QuestTechnologyIntl.com

ITEM	VSP-2404	Date	2016. 07. 05
SCALE	1:1	UNITS	mm
length tolerance: ± 0.5 mm tolerance			