
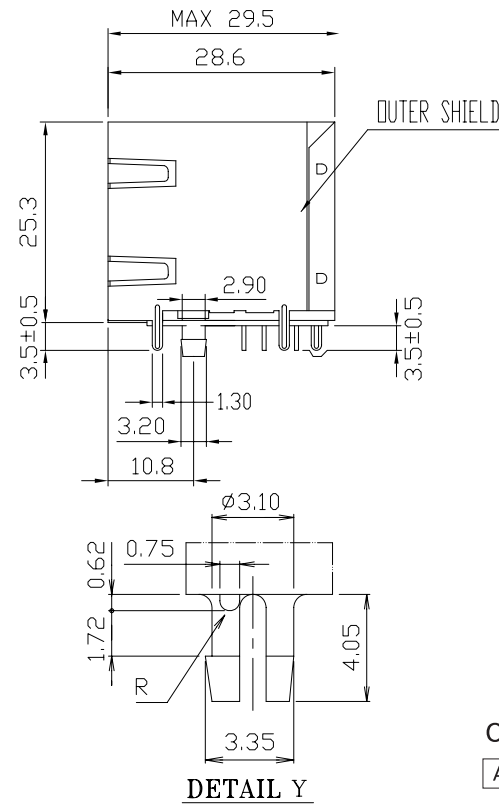
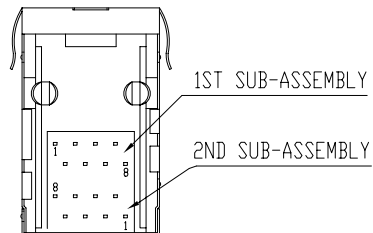
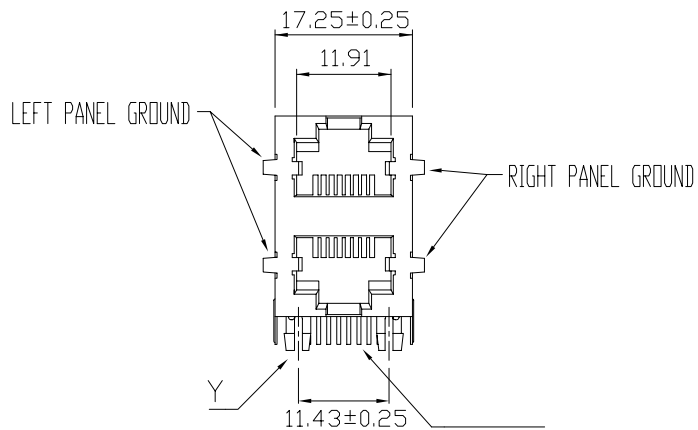





DETAIL Y

MATERIAL:

- HOUSING-PBT POLYESTER UL-94V-0 MIXED GLASS FIBER. STANDARD COLOR-BLACK
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH IN SOLDER AREA.
- SHIELD-0.20mm THICK COPPER ALLOY, PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

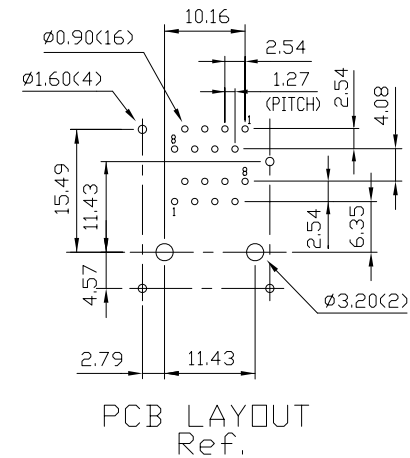

Ordering Information

AJT48D	8	8	2	X
Type	Positions	Contacts	Ports	Plating 1 = 6u" 3 = 30u"

Tolerance
unless otherwise specified
mm
.0 ± .25
.00 ± .13
.000 ± .05



P/N: AJT48D882X

Desc.: Side entry, 2 X 1, shielded, thru hole modular jack

Date: 8-16-10

Drawn By: Donna Mears

Dimensions in mm

Verified By: Mike Balekdjian