
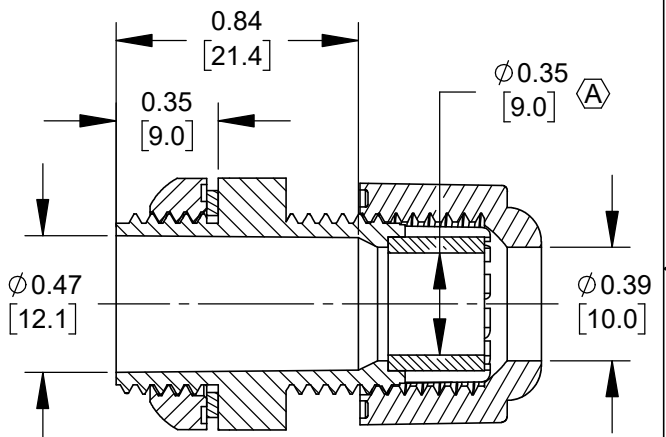
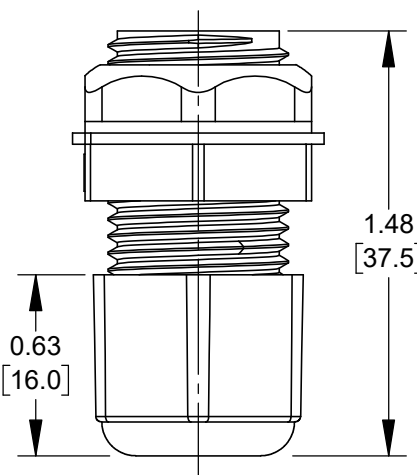
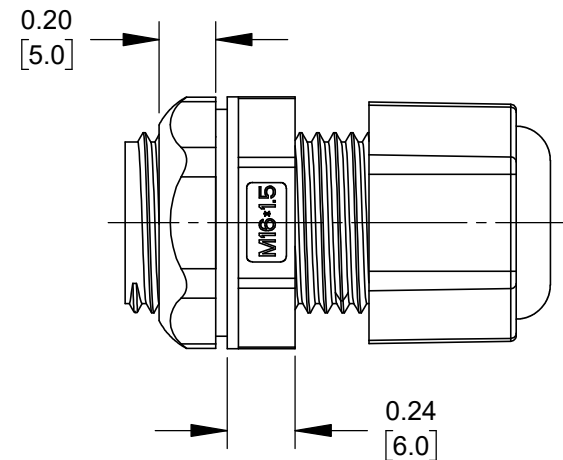
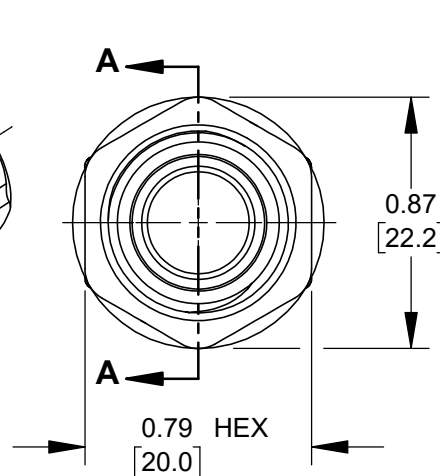


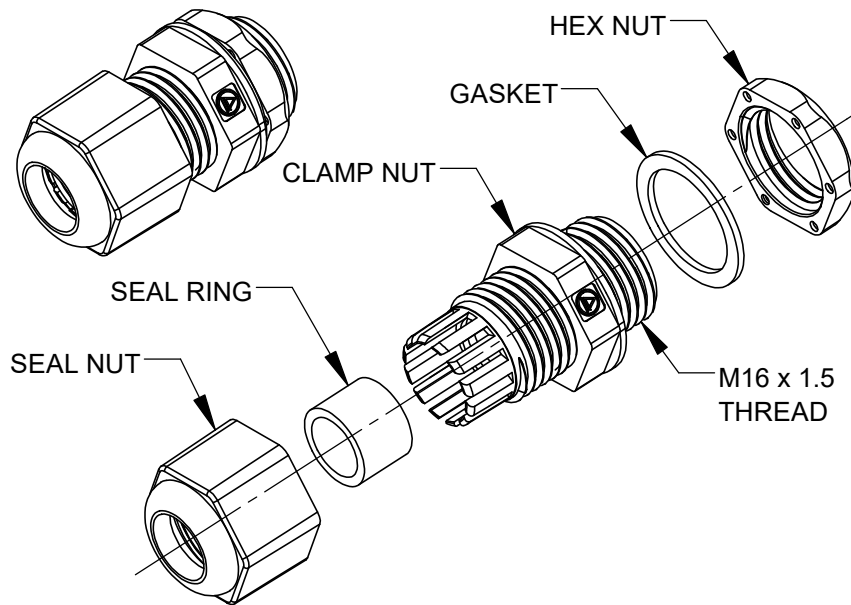

SECTION A-A

CUSTOMER DRAWING

NOTES:

1. CABLE RANGE: $\varnothing 0.236-0.354$ [6.0 - 9.0]
2. RECOMMENDED MOUNTING HOLE: $\varnothing 0.656$ [16.67].
3. IP68 RATED WHEN PROPERLY ASSEMBLED.
IMMERSED IN 1.8M WATER FOR 24 HOURS.
4. ALL PARTS SHIPPED ASSEMBLED.
5. MATERIALS:
SEAL NUT, CLAMP NUT, HEX NUT - BLACK,
THERMOPLASTIC
GASKET AND SEAL RING - BLACK, EDPM RUBBER
6. THIS PRODUCT IS RoHS COMPLIANT.

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.						
						SIZE	WIDTH		MULT	LBS/M	TEMPER	
						FINISH				MATERIAL		
						SPEC No.				SPEC No.		
						FIRST USED ON			SCALE		Switchcraft®	
B	28315	09/09/20	PC	TJK			1.5:1					
A	28308	07/31/20	PC	TJK	DATE DRAWN	BY	CHKD	APVD				
					4/30/20	FM	4/30/20	TJK	7/2/20			
REV	ECO NUMBER	DATE	BY	APVD	NAME M16 x 1.5 CABLE GLAND, CABLE RANGE Ø 6.0 - 9.0mm					PART No.	REV	
REVISIONS					DO NOT SCALE DRAWING		CGM16N35					B

SolidWorks CAD File

