
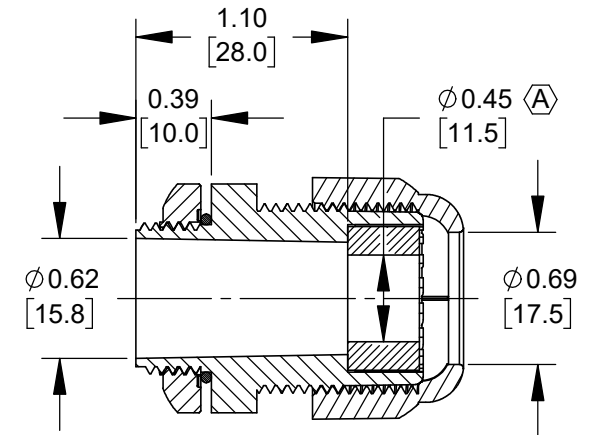
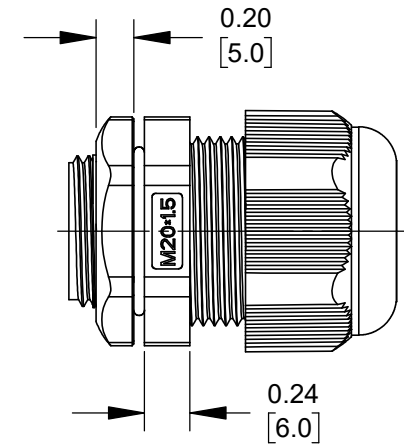
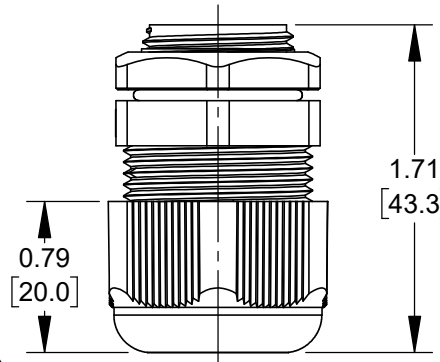
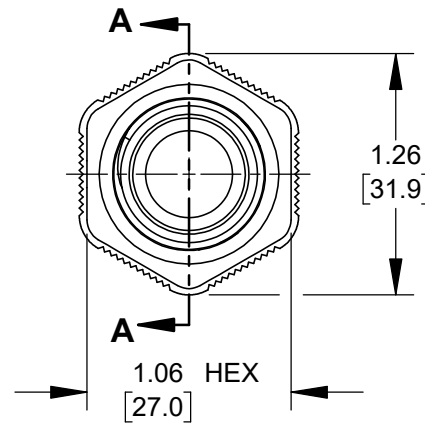


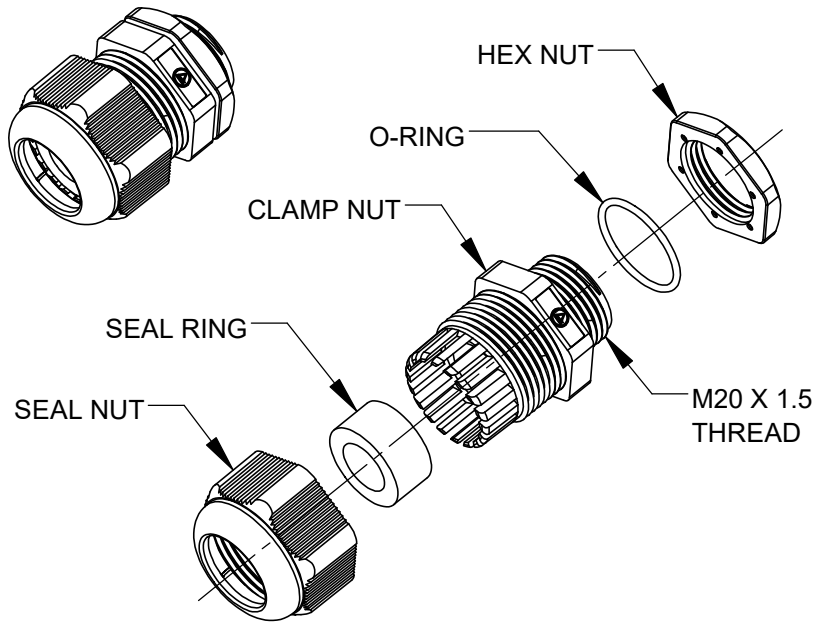

SECTION A-A

CUSTOMER DRAWING

NOTES:

1. CABLE RANGE: $\phi 0.217-0.441$ [5.5-11.2].
2. RECOMMENDED MOUNTING HOLE: $\phi 0.813$ [20.64].
3. IP68 RATED WHEN PROPERLY ASSEMBLED.
IMMERSED IN 1.8M WATER FOR 24 HOURS.
4. ALL PARTS SHIPPED ASSEMBLED.
5. MATERIALS:
SEAL NUT, CLAMP NUT, HEX NUT - BLACK, THERMOPLASTIC.
O-RING AND SEAL RING - BLACK, SILICONE.
6. THIS PRODUCT IS RoHS COMPLIANT.

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.										
						SIZE	WIDTH	MULT	LBS/M	TEMPER						
						FINISH			MATERIAL							
						SPEC No.			SPEC No.							
						FIRST USED ON		SCALE		Switchcraft®						
								1:1								
B	28315	09/09/20	PC	TJK	DATE DRAWN	BY	CHKD	APVD								
A	28308	07/31/20	PC	TJK	5/4/20	FM	FM	TJK								
							5/4/20	7/10/20								
REV	ECO NUMBER	DATE	BY	APVD	NAME				REV	SHEET	1	OF	1			
REVISIONS					DO NOT SCALE DRAWING		M20 X 1.5 CABLE GLAND, CABLE RANGE Ø5.5 - 11.2mm				PART No.		CGM20N44		REV	B

DO NOT SCALE DRAWING

SolidWorks CAD File

