
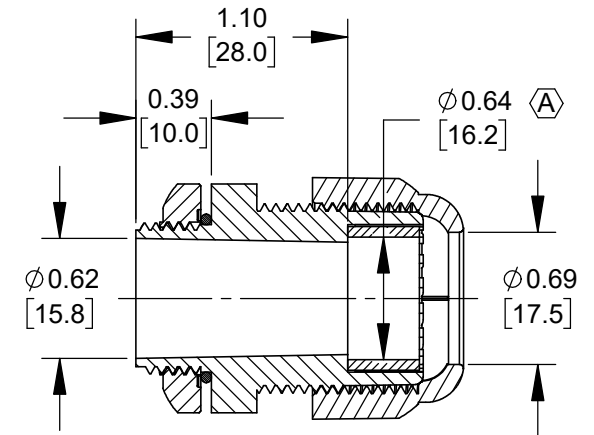
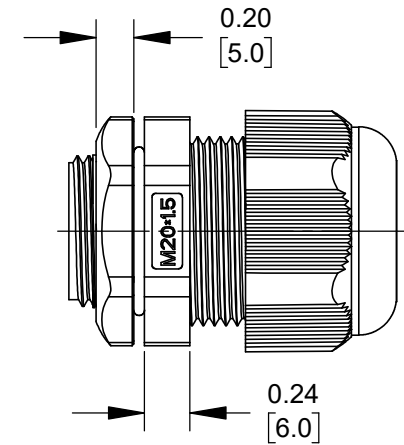
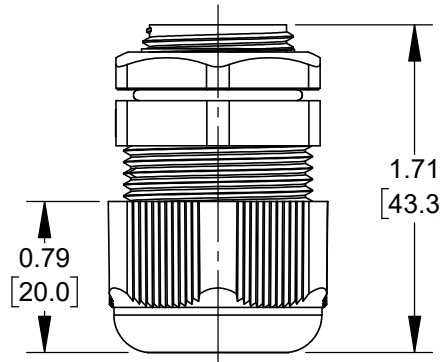
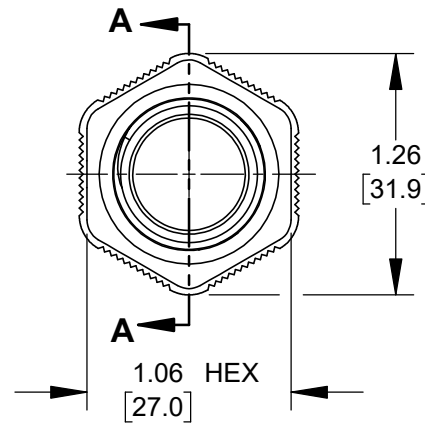


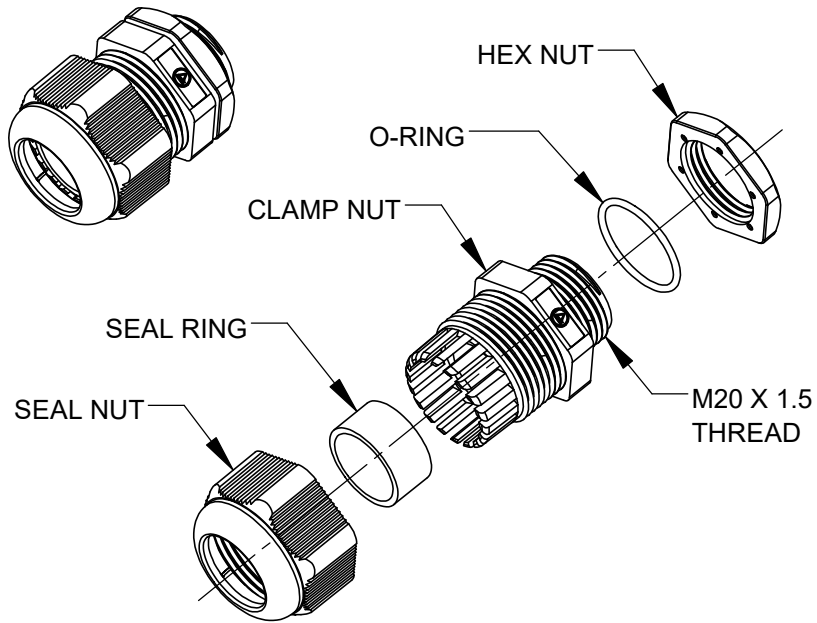

SECTION A-A

CUSTOMER DRAWING

NOTES:

1. CABLE RANGE: $\varnothing 0.315$ - 0.630 [8.0-16.0].
2. RECOMMENDED MOUNTING HOLE: $\varnothing 0.813$ [20.64].
3. IP68 RATED WHEN PROPERLY ASSEMBLED.
IMMERSED IN 1.8M WATER FOR 24 HOURS.
4. ALL PARTS SHIPPED ASSEMBLED.
5. MATERIALS:
SEAL NUT, CLAMP NUT, HEX NUT - BLACK, THERMOPLASTIC.
O-RING AND SEAL RING - BLACK, SILICONE.
6. THIS PRODUCT IS RoHS COMPLIANT.

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES [mm]
- TWO PLACE DECIMALS ± 0.02 [0.5]
- THREE PLACE DECIMALS ± 0.005 [0.13]

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.

SIZE		WIDTH		MULT		LBS/M		TEMPER		
FINISH SPEC No.					MATERIAL SPEC No.					
FIRST USED ON			SCALE 1:1		Switchcraft®					
DATE DRAWN 5/4/20	BY FM	CHKD FM 5/4/20	APVD TJK 7/10/20							
NAME M20 X 1.5 CABLE GLAND, CABLE RANGE Ø8.0 - 16.0mm					REV SHEET 1 OF 1			PART No. CGM20N63		REV B

SolidWorks CAD File

