
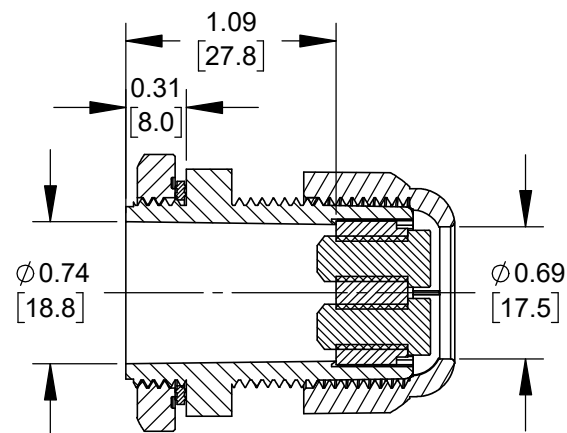
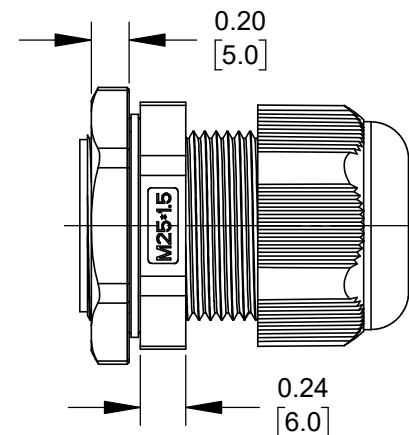
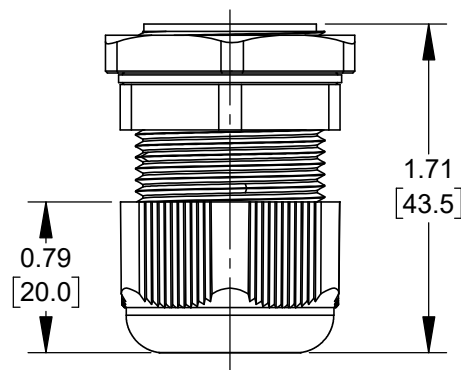
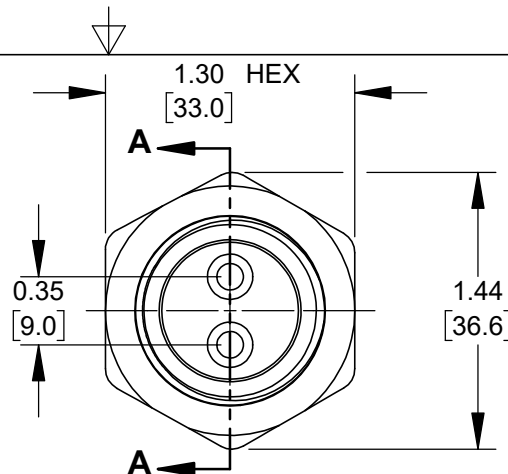


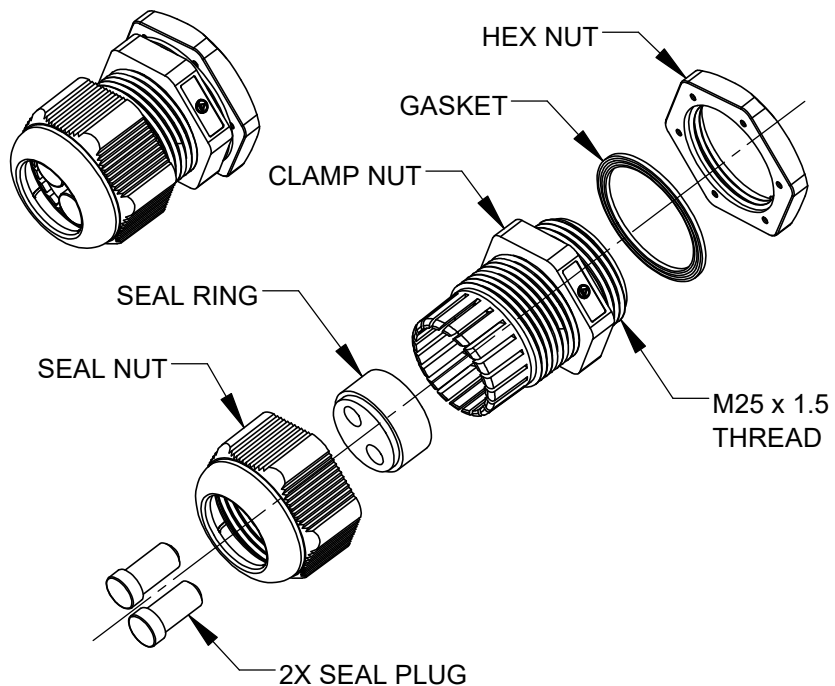

SECTION A-A

CUSTOMER DRAWING

NOTES:

1. RECOMMENDED MOUNTING HOLE: Ø1.000 [25.40].
2. IP68 RATED WHEN PROPERLY ASSEMBLED.
IMMERSED IN 1.8M WATER FOR 24 HOURS.
3. PARTS ARE SHIPPED ASSEMBLED.
4. CABLE RANGE: Ø0.118– 0.236 [3.0-6.0] - TYP 2 PLACES.
5. MATERIALS:
SEAL NUT, CLAMP NUT, HEX NUT - BLACK, THERMOPLASTIC.
GASKET, SEAL RING AND SEAL PLUGS - BLACK, SILICONE.
6. THIS PRODUCT IS RoHS COMPLIANT.

						THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.										
					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	SIZE		WIDTH		MULT		LBS/M		TEMPER		
						FINISH SPEC No.						MATERIAL SPEC No.				
						FIRST USED ON				SCALE 1:1		Switchcraft® SHEET 1 OF 1				
B	28315	09/09/20	PC	TJK		DATE DRAWN 5/6/20	BY FM	CHKD FM 5/6/20	APVD TJK 7/16/20							
A	28308	07/31/20	PC	TJK		NAME M25 x 1.5 CABLE GLAND, 2 HOLE, CABLE RANGE Ø 3.0 - 6.0mm						PART No. CGM25N24X2				REV B
REV	ECO NUMBER	DATE	BY	APVD												
REVISIONS					DO NOT SCALE DRAWING											