

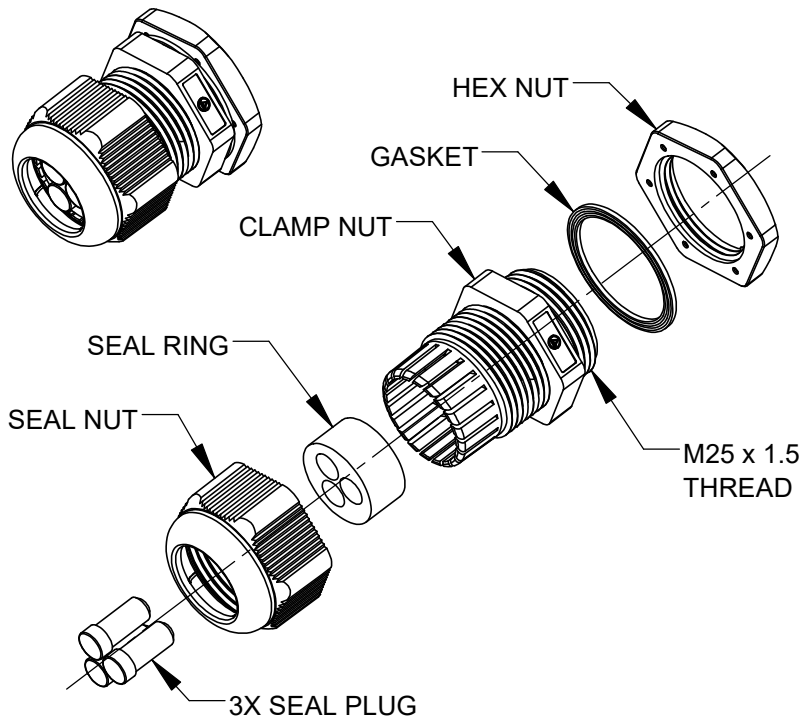
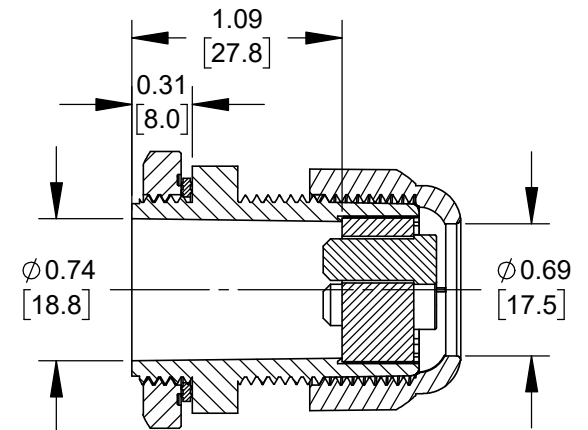
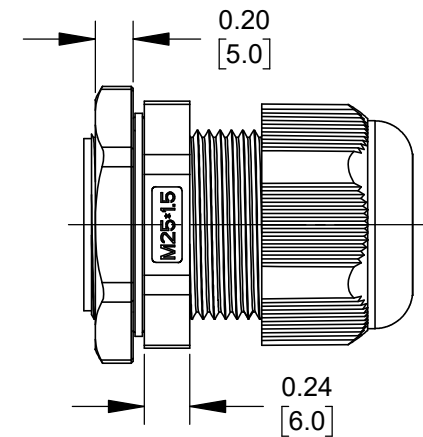


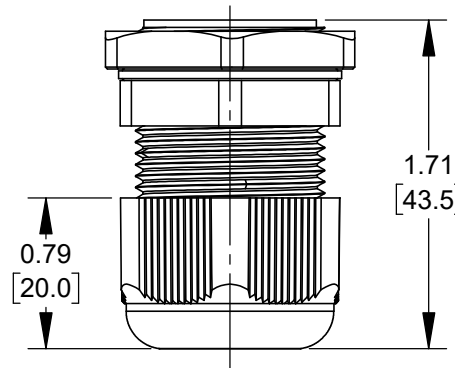

NOTES:

1. RECOMMENDED MOUNTING HOLE: Ø1.000 [25.40].
- (B) 2. IP68 RATED WHEN PROPERLY ASSEMBLED.
IMMERSED IN 1.8M WATER FOR 24 HOURS.
3. PARTS ARE SHIPPED ASSEMBLED.
4. CABLE RANGE: Ø0.118– 0.236 [3.0-6.0] - TYP 3 PLACES.
5. MATERIALS:
SEAL NUT, CLAMP NUT, HEX NUT - BLACK, THERMOPLASTIC.
GASKET, SEAL RING AND SEAL PLUGS - BLACK, SILICONE.
6. THIS PRODUCT IS RoHS COMPLIANT.

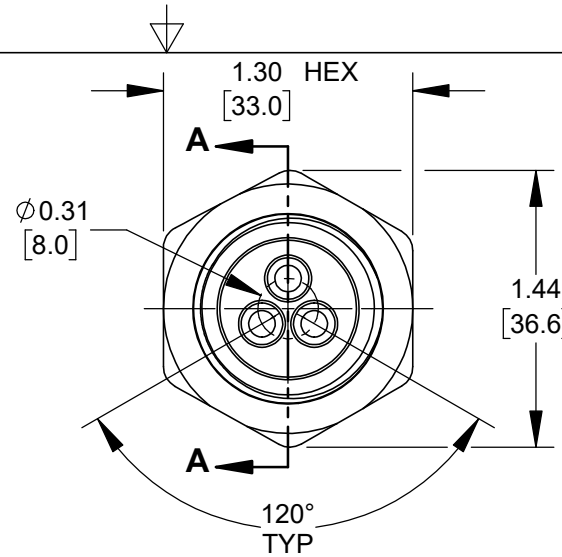

SECTION A-A

CUSTOMER DRAWING

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.					
						SIZE	WIDTH	MULT	LBS/M	TEMPER	
						FINISH			MATERIAL		
						SPEC No.			SPEC No.		
						FIRST USED ON		SCALE		Switchcraft®	
								1:1			
B	28315	09/09/20	PC	TJK		DATE DRAWN	BY	CHKD	APVD	SHEET 1 OF 1	
A	28308	07/31/20	PC	TJK		5/6/20	FM	5/6/20	TJK 7/16/20		
REV	ECO NUMBER	DATE	BY	APVD		NAME M25 x 1.5 CABLE GLAND, 3 HOLE, CABLE RANGE Ø 3.0 - 6.0mm				PART No.	REV
REVISIONS					DO NOT SCALE DRAWING		CGM25N24X3				B

DO NOT SCALE DRAWING

SolidWorks CAD File

