
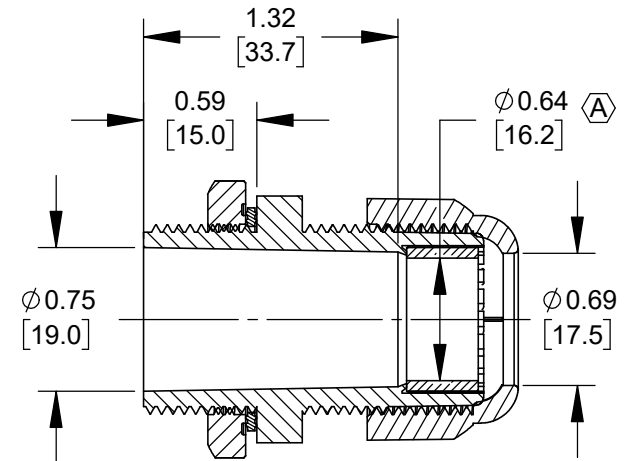
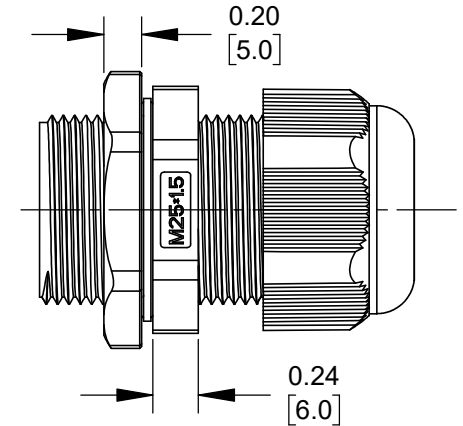
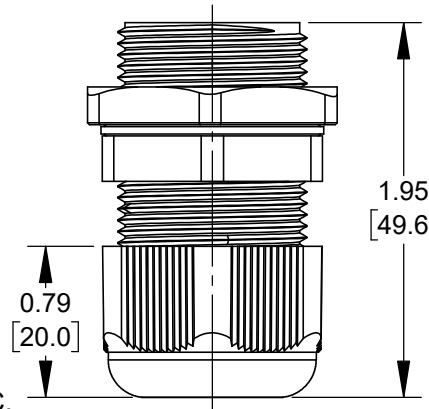
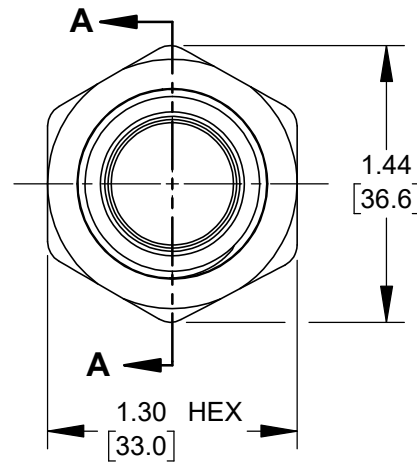


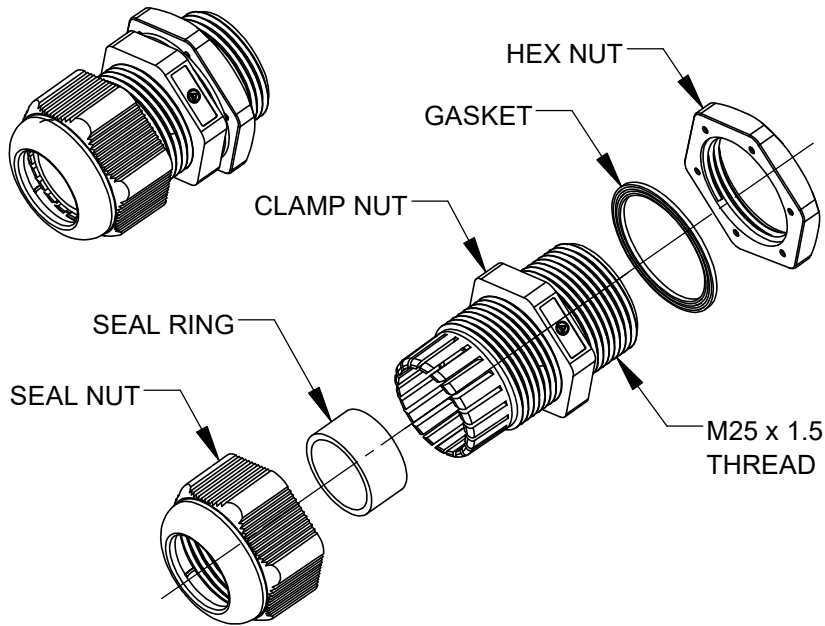

SECTION A-A

CUSTOMER DRAWING

NOTES:

1. CABLE RANGE: $\phi 0.394-0.630$ [10.0-16.0].
2. RECOMMENDED MOUNTING HOLE: $\phi 1.000$ [25.40].
3. IP68 RATED WHEN PROPERLY ASSEMBLED.
IMMERSED IN 1.8M WATER FOR 24 HOURS.
4. ALL PARTS SHIPPED ASSEMBLED.
5. MATERIALS:
SEAL NUT, CLAMP NUT, HEX NUT - BLACK, THERMOPLASTIC.
GASKET AND SEAL RING- BLACK SILICONE.
6. THIS PRODUCT IS RoHS COMPLIANT.

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
						SIZE	WIDTH	MULT	LBS/M	TEMPER
						FINISH			MATERIAL	
						SPEC No.			SPEC No.	
						FIRST USED ON		SCALE		Switchcraft® SHEET 1 OF 1
B	28315	09/09/20	PC	TJK	DATE DRAWN	BY	CHKD	APVD		
A	28308	07/31/20	PC	TJK	5/6/20	FM	5/6/20	TJK 7/10/20		
REV	ECO NUMBER	DATE	BY	APVD	NAME M25 x 1.5 CABLE GLAND, CABLE RANGE Ø 10.0 - 16.0mm				PART No.	REV
REVISIONS					DO NOT SCALE DRAWING	CGM25N63				B