

DESIGNED AND DIMENSIONED IN INCHES[MILLIMETERS]
ALL DIMENSIONS REFERENCE

DO NOT
SCALE FROM
THIS PRINT

SMPM-PF-P-XX-ST-EM-1

GENDER
-P: PLUG

INTERFACE
-F: FULL DETENT

TYPE
-P: PCB

OPTION
-1

TERMINATION
-EM: EDGE MOUNT

ORIENTATION
-ST: STRAIGHT

PLATING SPECIFICATION
(VALUES GIVEN ARE IN MICRO-INCHES)
-HG: 30μ" GOLD ON CENTER CONTACT
10μ" GOLD ON OUTER CONTACT


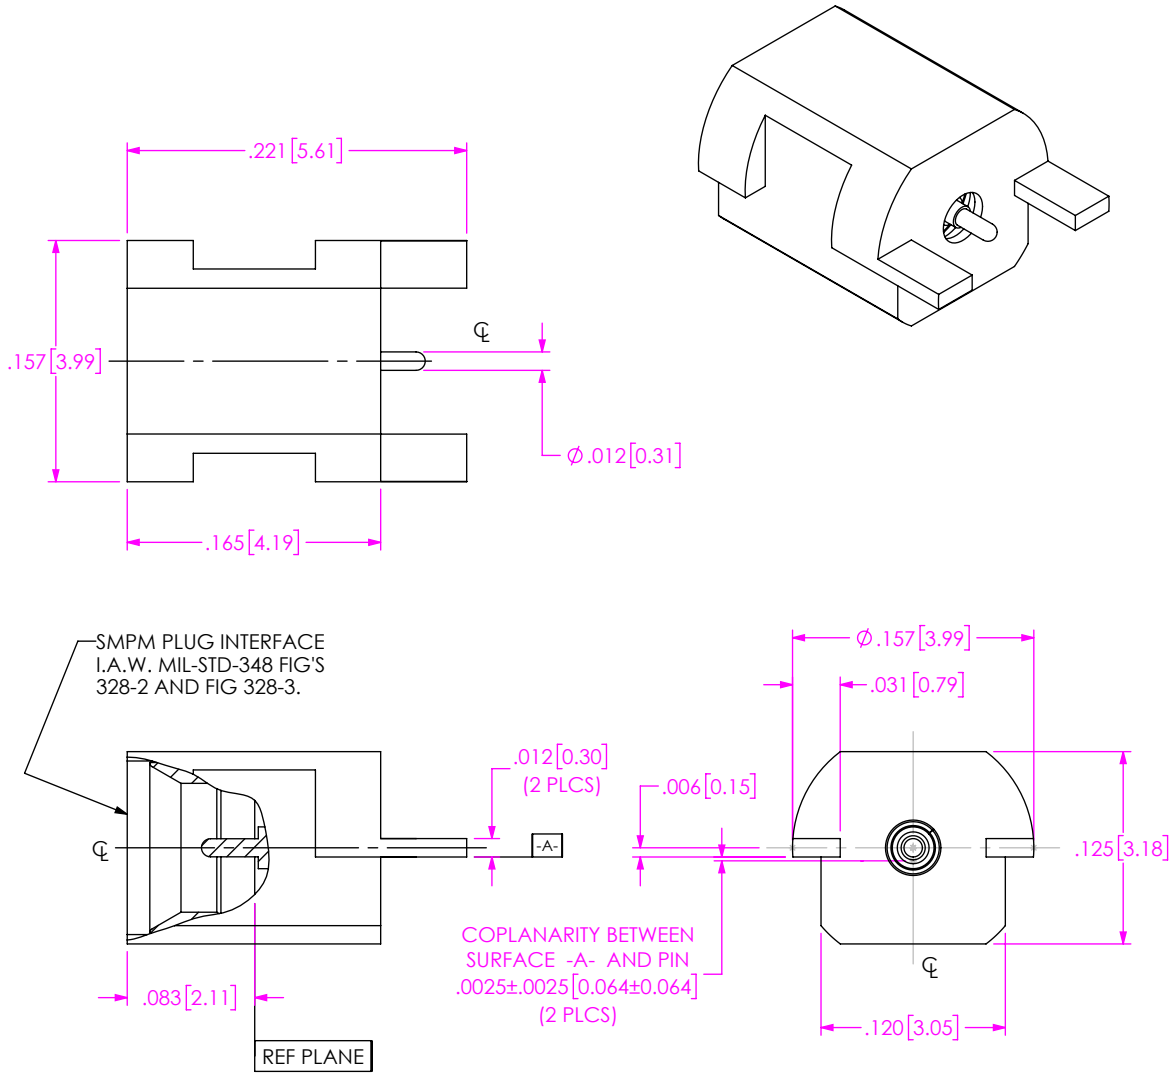


FIG 1
SMPM-PF-P-XX-ST-EM-1 SHOWN

NOTES:
1. TRAYS TO BE STANDARD PACKAGING

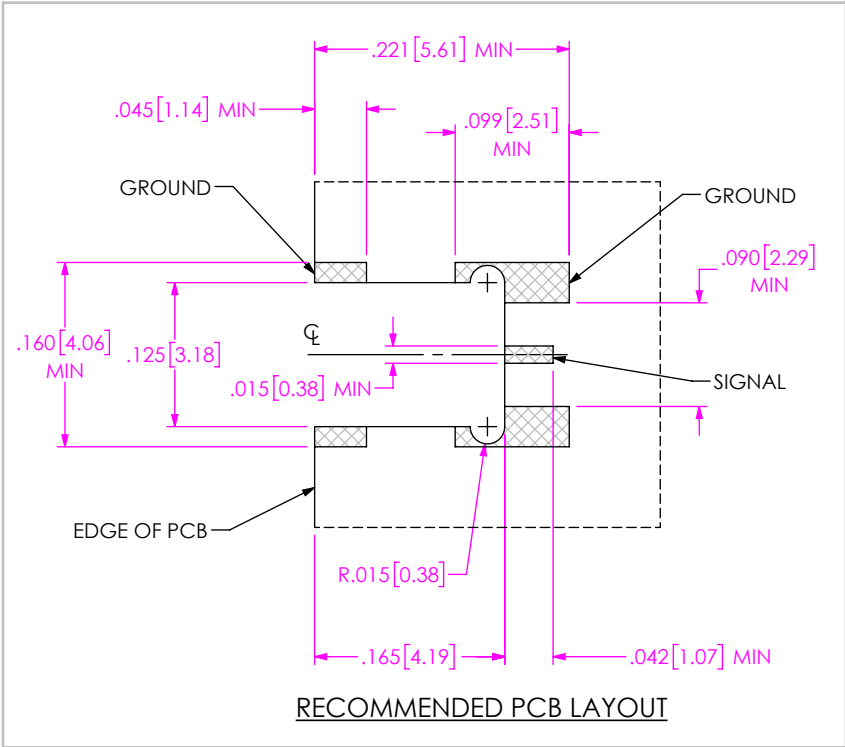

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.	
MATERIAL:	DO NOT SCALE DRAWING SHEET SCALE: 8:1
BODY, BUSHING & PIN: GOLD PLATED COPPER ALLOY INSULATOR: PEK HIGH TEMP POLYMER	DESCRIPTION: SMPM-PLUG, EDGE MOUNT
	DWG. NO. SMPM-PF-P-XX-ST-EM-1
F:\DWG\MISC\WKTG\SMPM-PF-P-XX-ST-EM-1-MKT.SLDDRW	BY: SHERRY W 2/2/2018 SHEET 1 OF 1