

Product data sheet

Specifications



Indicating Bank, 70mm, base unit and cap, direct or tube mounting, bottom or side cable entry

XVBC21

⚠ To be discontinued

⚠ To be discontinued on: Jun 30, 2025

⚠ To be end-of-service on: Dec 31, 2026

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XVB Universal
Product or Component Type	Base unit with cover
Component name	XVBC
Material	Glass reinforced polyamide: base unit Polycarbonate: cover unit

Complementary

Fixing Mode	Direct or tube fixing
Mounting diameter	2.8 in (70 mm)
Product destination	Banks without flash discharge tube unit
Electrical connection	1 connector standard input
cable entry	Bottom or side entry
Assembly style	Customer assembly, up to 5 units
Terminals description ISO n°1	(GND)GROUND (COM-1)PW (COM-4)PW (COM-3)PW (COM-5)PW (COM-2)PW
Product Weight	0.42 lb(US) (0.19 kg)

Environment

Product Certifications	CCC EAC CSA C22-2 No 14 UL 508
Standards	IEC 60947-5-1
Protective treatment	TC
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
NEMA degree of protection	Type 4X UL indoor)

Ordering and shipping details

Category	US100XV22611
----------	--------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Discount Schedule	00XV
GTIN	3389110845020
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.35 in (8.500 cm)
Package 1 Width	3.94 in (10.000 cm)
Package 1 Length	3.74 in (9.500 cm)
Package 1 Weight	7.266 oz (206.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	36
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	18.018 lb(US) (8.173 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	288
Package 3 Height	29.53 in (75.000 cm)
Package 3 Width	23.62 in (60.000 cm)
Package 3 Length	31.50 in (80.000 cm)
Package 3 Weight	157.666 lb(US) (71.516 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	31

Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	91020e1b-4a08-4f42-b464-aa95672e6762
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again


Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Indicator Bank without “Flash” Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

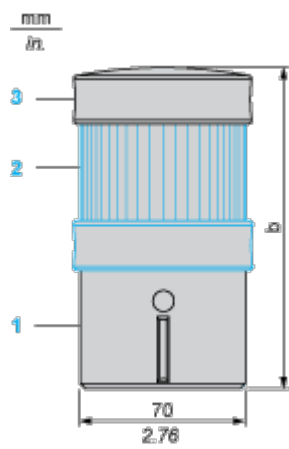


- (1) Base unit
- (2) Illuminated or audible signalling unit XVBC..., to be ordered separately
- (3) Cover (supplied with base unit)

Number of illuminated or audible signalling units (no “flash”)	b in mm	b in in.
1	138	5.43
2	201	7.91
3	264	10.39
4	327	12.87
5	390	15.35

Mounting and Clearance

Base Unit for Indicator Banks


Panel Cut-out for Direct Fixing

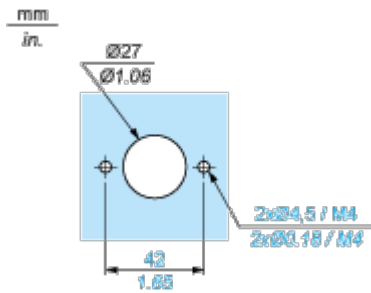

Connections and Schema


Illuminated Beacon

Wiring Diagram




Technical Illustration

Dimensions

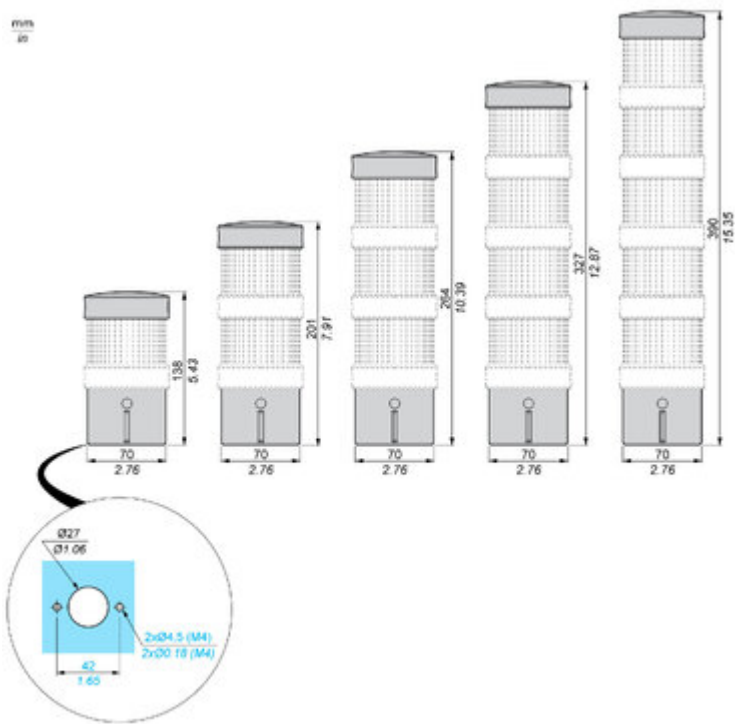

Technical Illustration

Wiring diagram

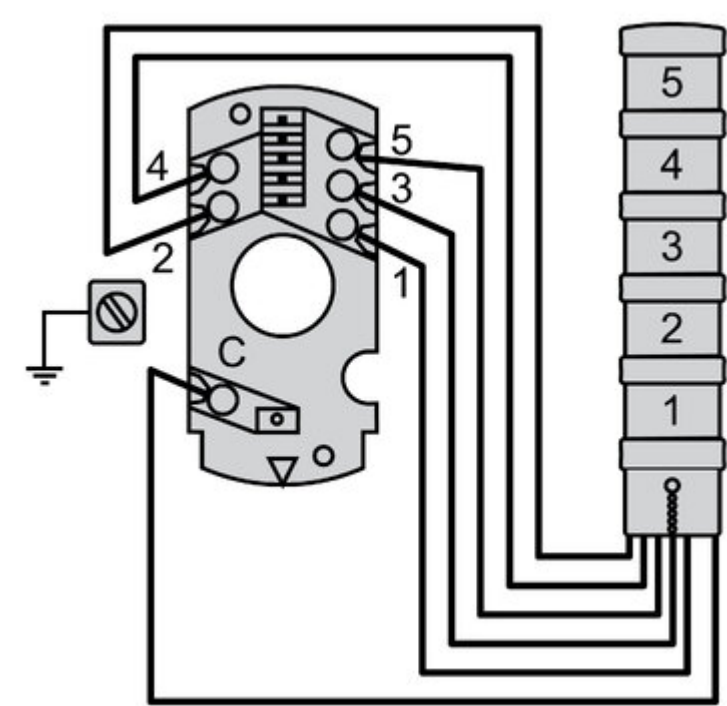

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XVB



3 types of light source:
10-Watt incandescent bulb,
built-in high-efficiency
LEDs, 5 and 10-joule
discharge tube



100,000 hours of
maintenance-free lighting
thanks to "LED Protected"
technology



Connector with
removable base, axial,
or side cable entry,
immediate assembly, and
fixing using a locking ring



High degree of protection
(IP66) and Shock
resistance (IK05)



Fully flexible and interchangeable
construction of up to 5 lens units
(six colors of light lens unit)



Offer Marketing Illustration

Product benefits / Features



Image of product / Alternate images

Alternative





Image of product in real life situation

