


Catalogue No: **V7-W4P**

SCREW TERMINAL PLUG IN 2.5mm 1 CONDUCTOR 32A GREY

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screw > Sprecher + Schuh Screw Type Terminals V7-W > Isolating Terminals > Fuse and disconnect terminals 2.5 mm²

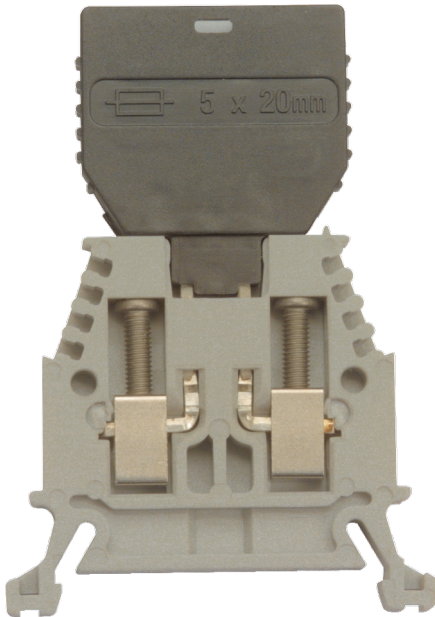

Representative Photo Only
(actual product may vary based on configuration selections)

Terminal Disconnect 2.5mm²

- Designed for ease of wiring, secure connections and durability
- Comprehensive range, offering a wide array of terminal types for various circuits and functions
- Terminals accommodate wire sizes from 0.5 to 70mm² wire cross section
- Cone shaped guide allows easy wire insertion
- Specialty terminals including two-level, grounding, diode, isolating, fuse, sensor and thermocouple terminals
- UL recognized, IEC and CSA certified.

SPECIFICATIONS

Product Series	V7
Component Type Termination Wiring	Terminal
Number of Conductors	2 qty
Number of Levels	1
Package Quantity	50 qty
Colour, Body / Housing	Grey colour
Wire / Conductor Size (Min)	0.5 mm ² min
Wire / Conductor Size (Max)	2.5 mm ²
Wire Strip Length	9 mm
Tightening Torque, Nominal	0.6 Nm
In, Rated Current	32 A
Un, Nominal Voltage	800 V
Height	45.3 mm
Width	6 mm
Depth	45 mm
Insulation Temperature (Min)	-40 °C
Insulation Temperature (Max)	90 °C
Standards Compliance	CSA C22.2 No.158 IEC 60947-1 IEC 60947-7-1 IEC 60947-7-2 UL 1059 UL 457 UL 486E
Certifications	CSA UR

Catalogue No: **V7-W4P**

SCREW TERMINAL PLUG IN 2.5mm 1 CONDUCTOR 32A GREY

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screw > Sprecher + Schuh Screw Type Terminals V7-W > Isolating Terminals > Fuse and disconnect terminals 2.5 mm²



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	V7W4P_Manufacturer Catalogue

