
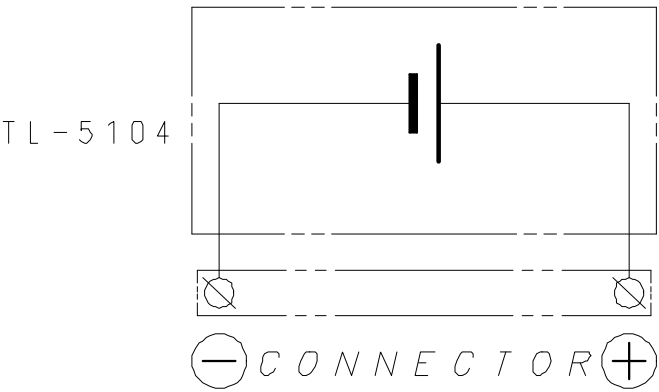



WARNING!
ALL THE INFORMATION CONTAINED IN THIS DOCUMENT OR DISCLOSED BY IT IS THE PROPERTY OF TADIRAN BATTERIES LTD. AND MAY NOT BE USED WITHOUT ITS WRITTEN AUTHORIZATION.

REV	△	DESCRIPTION	CHNGD SHEET	E.C.N	DATE	DRAWN	CHECKED
D		NEW EDITION		6562	23/05/00	IDA	SH.C.



- NOTE:
- ELECTRICAL CHARACTERISTICS:
ELECTROCHEMICAL SYSTEM: LITHIUM THIONYL CHLORIDE.
OPEN CIRCUIT VOLTAGE: 3.65÷3.70 (BY 10 MOHM DVM)
OPERATING VOLTAGE: 3.4V±0.2V (200µA LOAD)
AMPERE HOUR RATING: 2.1AH (AT 2mA TO 2V)
OPERATING TEMP: -55°C÷+85°C
 - OPTIONAL MATERIAL FOR WIRE INSULATION: TFE, UL1213.
 - DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY

9	15524212200	BATTERY FASTENER	3M SCOTCHMATE FASTENER WITH PRESSURE-SENSITIVE BACKING. LOOP-AND-HOOK. LOOP: 100D/0172 (WHITE). HOOK: 88/0172 (BLACK). (OR EQUIVALENT)	PC	1	
8		TAMPA PRINTING				
7	15524220010	CONNECTOR COVER	AMP 640550-3	PC	1	
6	15524220020	CONNECTOR HOUSING	AMP 640441-3	PC	1	
5	15000030230	WIRE, RED	AWG#24 7/32 P.V.C INSULATION UL-1007	MT	A/R	SEE
4	15000030231	WIRE, BLACK		MT	A/R	NOTE 2
3	15524210109	BATTERY COVER	"NORYL" N-190, BLACK, UL RECOGNIZED MATERIAL UL FILE NO. QM-FZ2	PC	1	
2	15524210106	BATTERY HOUSING				
1	15525221180	TL-5104 CELL	AA-SIZE	PC	1	
NO.	PART NO.	NAME	DESCRIPTION	U/M	QTY	NOTES
UNLESS OTHERWISE SPECIFIED:		TL-5242 BATTERY ORDERING P/N 15-5242-20000	PROCESSING LEVEL			
ALL DIMENSIONS ARE IN MM.			OPERATION		CATALOG NO.	
TOLERANCES: LINEAR : ANGLES :			-	-		
ROUGHNESS: (✓ ✓)			-	-		
PROD/PROJ:			-	-		
			-	-		
			DRAWN	IDA	23/05/00	SHEET/OF
SCALE: N.A.			DESIGNED	IDA	23/05/00	1 / 1
			CHECKED	SH.C.	23/05/00	
			APPROVED	WEI REB Z.	23/05/00	
15524200110						

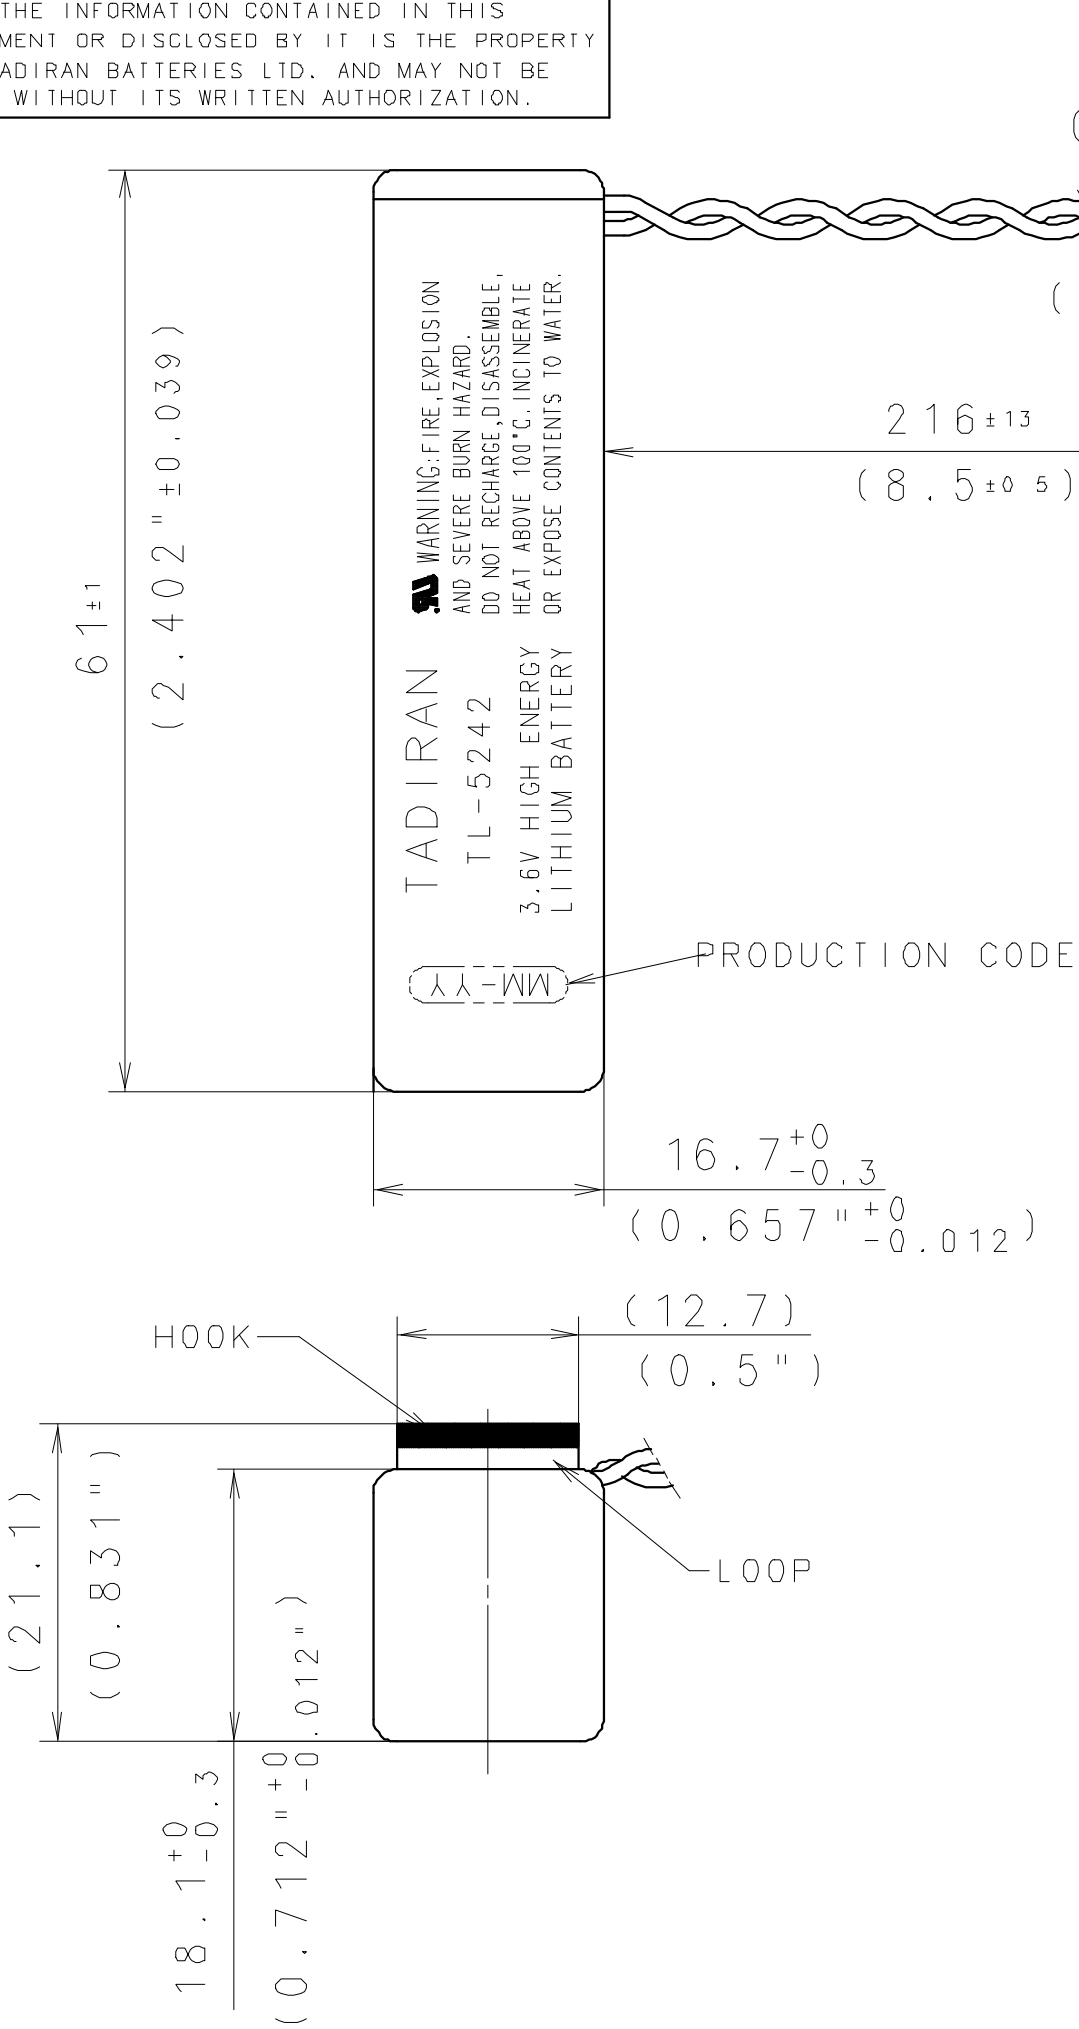

TADIRAN BATTERIES LTD.