

Notice for TAIYO YUDEN products

Please read this notice before using the TAIYO YUDEN products.

REMINDERS

- Product information in this catalog is as of October 2010. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

Please note that Taiyo Yuden Co., Ltd. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact Taiyo Yuden Co., Ltd. for further details of product specifications as the individual specification is available.

- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.

- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,(automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact Taiyo Yuden Co., Ltd. for more detail in advance. Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.

In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN' s official sales channel").

It is only applicable to the products purchased from any of TAIYO YUDEN' s official sales channel.

- Please note that Taiyo Yuden Co., Ltd. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. Taiyo Yuden Co., Ltd. grants no license for such rights.

- Caution for export

Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations", and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.

WOUND CHIP POWER INDUCTORS(BR SERIES)



REFLOW

FEATURES

- Suitable for the use as a choke coil in smaller DC/DC converters.

APPLICATIONS

- BR-series are suitable for an anti-noise measure on the power supply circuit of DSC, DVC, eBook, LCD-TV, mobile phones, PC, game equipments, various communication equipments and etc..

OPERATING TEMP.


- 40 ~ 105°C (Including-self-generated heat)

ORDERING CODE

B R △ 2 5 1 8 T 2 R 2 M △ △ △

1 Type	2 Characteristic Spec	3 External Dimensions (W×L) : mm (inch)	4 Packaging	5 Nominal Inductance [μH]	6 Inductance tolerance	7 Internal code
BR Wound Chip Power Inductors	△ Low Rdc L Low profile C High Current	1608 (0603) 1.6×0.8mm 2012 (0805) 2.0×1.2mm 2016 (0806) 2.0×1.6mm 2515 (1006) 2.5×1.5mm 2518 (1007) 2.5×1.8mm 3225 (1210) 3.2×2.5mm	T Tape & Reel	example R20 0.2 1R0 1.0 2R2 2.2 4R7 4.7 ※R=decimal point	M ±20% K ±10%	△△△ Standard product △=Blank Space

EXTERNAL DIMENSIONS/STANDARD QUANTITY

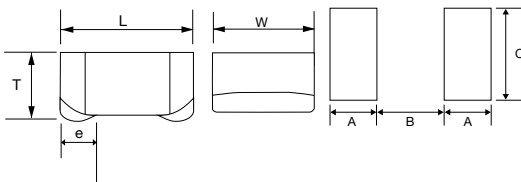

Type	A	B	C
1608	0.55	0.70	1.00
2012	0.60	1.00	1.45
2016	0.60	1.00	1.80
2515	0.60	1.50	1.70
2518	0.60	1.50	2.00
3225	0.85	1.70	2.70

Unit : mm

Recommended Land Patterns

Surface Mounting

- Mounting and soldering conditions should be checked beforehand.
- Applicable soldering process to this products is reflow soldering only.

Type	L	W	T	e	Standard Quantity [pcs]	
					Paper Tape	Embossed Tape
BR L1608	1.6±0.2 (0.063±0.008)	0.8±0.2 (0.031±0.008)	0.7 max (0.028 max)	0.45±0.15 (0.016±0.006)	—	3000
BR C1608	1.6±0.2 (0.063±0.008)	0.8±0.2 (0.031±0.008)	0.8±0.2 (0.031±0.008)	0.45±0.15 (0.016±0.006)	—	3000
BR L2012	2.00±0.20 (0.078±0.008)	1.25±0.20 (0.049±0.008)	1.00 max (0.040 max)	0.5±0.2 (0.020±0.008)	—	3000
BR C2012	2.00±0.20 (0.078±0.008)	1.25±0.20 (0.049±0.008)	1.4 max (0.056 max)	0.5±0.2 (0.020±0.008)	—	2000
BR C2016	2.00±0.20 (0.078±0.008)	1.6±0.20 (0.063±0.008)	1.6±0.20 (0.063±0.008)	0.5±0.2 (0.020±0.008)	—	2000
BR L2515	2.5±0.2 (0.098±0.008)	1.5±0.2 (0.060±0.008)	1.2 max (0.048 max)	0.5±0.2 (0.020±0.008)	—	2000
BRFL2518	2.5±0.2 (0.098±0.008)	1.8±0.2 (0.071±0.008)	1.00 max (0.040 max)	0.5±0.2 (0.020±0.008)	—	3000
BR L2518	2.5±0.2 (0.098±0.008)	1.8±0.2 (0.071±0.008)	1.2 max (0.048 max)	0.5±0.2 (0.020±0.008)	—	3000
BRHL2518	2.5±0.2 (0.098±0.008)	1.8±0.2 (0.071±0.008)	1.5 max (0.060 max)	0.5±0.2 (0.020±0.008)	—	2000
BR C2518	2.5±0.2 (0.098±0.008)	1.8±0.2 (0.071±0.008)	1.8±0.2 (0.071±0.008)	0.5±0.2 (0.020±0.008)	—	2000
BR L3225	3.2±0.2 (0.126±0.008)	2.5±0.2 (0.098±0.008)	1.7 max (0.068 max)	0.75±0.2 (0.03±0.008)	—	2000

Unit : mm

AVAILABLE INDUCTANCE RANGE

Range	Type	BR L1608	BR C1608	BR L2012	BR C2012	BR C2016	BR L2515	BRFL2518	BR L2518	BRHL2518	BR C2518	BR L3225
Inductance [μH]		Imax [mA] Rdc±30% [Ω]	Imax [mA] Rdc±30% [Ω]	Imax [mA] Rdc±30% [Ω]	Imax [mA] Rdc±30% [Ω]	Imax [mA] Rdc±30% [Ω]	Imax [mA] Rdc±30% [Ω]	Imax [mA] Rdc±30% [Ω]	Imax [mA] Rdc±30% [Ω]	Imax [mA] Rdc±30% [Ω]	Imax [mA] Rdc±30% [Ω]	Imax [mA] Rdc±30% [Ω]
0.20												
0.47												
1.0		650 1μH 0.230	520 0.2μH 0.180	850 0.47μH 0.135	1,500 1μH 0.06	1,100 1μH 0.085	1,500 1μH 0.070	1,200 1μH 0.080	1,000 1μH 0.080	2,000 1μH 0.056	1,650 1μH 0.050	2,200 1μH 0.043
2.2			280 2.2μH 0.550		1,000 1μH 0.11		1,000 1μH 0.135	850 1μH 0.135	850 1μH 0.135	1,500 1μH 0.116		
4.7					700 4.7μH 0.265		700 4.7μH 0.265	650 4.7μH 0.330	470 4.7μH 0.400	1,100 4.7μH 0.245		
10				270 0.850		450 0.400					610 0.350	700 0.350
22		200 15μH 2.56										
47												
100				85 100μH 7.70		140 100μH 3.40					190 100μH 3.60	250 100μH 2.50

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

● 1608(0603)TYPE

Ordering code	EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±30%)	Rated current ※) [mA]		Measuring frequency [MHz]
						Saturation current Idc1	Temperature rise current Idc2	
BR L1608T1R0M	RoHS	1.0	±20%	700	0.230	510	650	1.0
BR L1608T1R5M	RoHS	1.5		600	0.280	440	590	
BR L1608T2R2M	RoHS	2.2		400	0.400	360	500	
BR L1608T3R3M	RoHS	3.3		300	0.650	290	390	
BR L1608T4R7M	RoHS	4.7		150	1.00	240	310	
BR L1608T6R8M	RoHS	6.8		100	1.64	200	250	
BR L1608T100M	RoHS	10		45	2.00	170	220	
BR L1608T150M	RoHS	15		32	2.56	150	200	

Ordering code	EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±30%)	Rated current ※) [mA]		Measuring frequency [MHz]
						Saturation current Idc1	Temperature rise current Idc2	
BR C1608TR20M	RoHS	0.20	±20%	400	0.060	1,750	980	7.96
BR C1608TR35M	RoHS	0.35		300	0.080	1,400	810	
BR C1608TR45M	RoHS	0.45		200	0.090	1,250	800	
BR C1608TR56M	RoHS	0.56		170	0.095	1,150	760	
BR C1608TR77M	RoHS	0.77		150	0.110	1,000	660	
BR C1608T1R0M	RoHS	1.00		140	0.180	850	520	
BR C1608T1R5M	RoHS	1.50		120	0.300	700	410	
BR C1608T2R2M	RoHS	2.20		100	0.550	550	280	

● 2012(0805)TYPE

Ordering code	EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±30%)	Rated current ※) [mA]		Measuring frequency [MHz]
						Saturation current Idc1	Temperature rise current Idc2	
BR L2012TR47M	RoHS	0.47	±20%	350	0.090	1,100	1,050	7.96
BR L2012T1R0M	RoHS	1.0		300	0.135	850	850	
BR L2012T1R5M	RoHS	1.5		250	0.180	700	750	
BR L2012T2R2M	RoHS	2.2		200	0.300	600	550	
BR L2012T3R3M	RoHS	3.3		190	0.500	490	440	
BR L2012T4R7M	RoHS	4.7		150	0.550	340	400	
BR L2012T6R8M	RoHS	6.8		60	0.750	290	350	2.52
BR L2012T100M	RoHS	10		30	0.850	270	330	
BR L2012T150M	RoHS	15		15	1.00	220	300	
BR L2012T220M	RoHS	22		13	1.30	190	270	
BR L2012T330M	RoHS	33		8.0	2.00	150	220	0.796
BR L2012T470M	RoHS	47		7.0	3.50	125	160	
BR L2012T680M	RoHS	68		6.5	5.80	100	110	
BR L2012T101M	RoHS	100		6.0	7.70	85	85	

Ordering code	EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±30%)	Rated current ※) [mA]		Measuring frequency [MHz]
						Saturation current Idc1	Temperature rise current Idc2	
BR C2012T1R0M	RoHS	1.0	±20%	490	0.060	1,500	1,400	1.0
BR C2012T1R5MD	RoHS	1.5		390	0.090	1,200	1100	
BR C2012T2R2MD	RoHS	2.2		350	0.110	1,100	1000	
BR C2012T3R3MD	RoHS	3.3		300	0.170	800	870	
BR C2012T4R7MD	RoHS	4.7		250	0.265	700	600	

● 2016(0806)TYPE

Ordering code	EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±30%)	Rated current ※) [mA]		Measuring frequency [MHz]
						Saturation current Idc1	Temperature rise current Idc2	
BR C2016T1R0M	RoHS	1.0	±20%	450	0.085	1,350	1,100	0.10
BR C2016T1R5M	RoHS	1.5		370	0.150	1,100	820	
BR C2016T2R2M	RoHS	2.2		250	0.180	910	760	
BR C2016T3R3M	RoHS	3.3		140	0.220	740	680	
BR C2016T4R7M	RoHS	4.7		78	0.270	660	610	
BR C2016T6R8M	RoHS	6.8		39	0.330	550	560	
BR C2016T100□	RoHS	10	±10% ±20%	35	0.400	450	520	
BR C2016T150□	RoHS	15		28	0.60	400	410	
BR C2016T220□	RoHS	22		24	1.00	310	310	
BR C2016T330□	RoHS	33		13	1.70	270	240	
BR C2016T470□	RoHS	47		11	2.20	210	210	
BR C2016T680□	RoHS	68		8	2.80	200	190	
BR C2016T101□	RoHS	100		7	3.40	140	170	

• Please specify the inductance tolerance code. (M or K)

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

PART NUMBERS

● 2515(1006)TYPE

Ordering code		EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±30%)	Rated current ※) [mA]		Measuring frequency [MHz]
							Saturation current Idc1	Temperture rise current Idc2	
BR L2515T1R0M		RoHS	1.0	±20%	160	0.070	1,500	1,350	1.0
BR L2515T1R5M		RoHS	1.5		130	0.100	1,200	1150	
BR L2515T2R2M		RoHS	2.2		100	0.135	1,000	1000	
BR L2515T3R3MD		RoHS	3.3		70	0.215	800	750	
BR L2515T4R7MD		RoHS	4.7		60	0.265	650	700	

● 2518(1007)TYPE

Ordering code		EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±30%)	Rated current ※) [mA]		Measuring frequency [MHz]
							Saturation current Idc1	Temperture rise current Idc2	
BRFL2518T1R0M		RoHS	1.0	±20%	130	0.090	1200	1200	1.0
BRFL2518T1R5M		RoHS	1.5		100	0.110	1100	1000	
BRFL2518T2R2M		RoHS	2.2		80	0.130	850	950	
BRFL2518T3R3M		RoHS	3.3		70	0.220	700	700	
BRFL2518T4R7M		RoHS	4.7		60	0.330	650	650	

Ordering code		EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±30%)	Rated current ※) [mA]		Measuring frequency [MHz]
							Saturation current Idc1	Temperture rise current Idc2	
BR L2518T1R0M		RoHS	1.0	±20%	130	0.080	1300	1000	7.96
BR L2518T1R5M		RoHS	1.5		100	0.100	1200	920	
BR L2518T2R2M		RoHS	2.2		80	0.135	900	850	
BR L2518T3R3M		RoHS	3.3		70	0.300	750	580	
BR L2518T4R7M		RoHS	4.7		60	0.400	650	470	

Ordering code		EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±30%)	Rated current ※) [mA]		Measuring frequency [MHz]
							Saturation current Idc1	Temperture rise current Idc2	
BRHL2518T1R0M		RoHS	1.0	±20%	100	0.055	2,000	1,400	1.0
BRHL2518T1R5M		RoHS	1.5		80	0.085	1,700	1100	
BRHL2518T2R2M		RoHS	2.2		68	0.115	1,500	1000	
BRHL2518T3R3MD		RoHS	3.3		54	0.165	1,200	800	
BRHL2518T4R7MD		RoHS	4.7		46	0.245	1,100	750	

Ordering code		EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±30%)	Rated current ※) [mA]		Measuring frequency [MHz]
							Saturation current Idc1	Temperture rise current Idc2	
BR C2518T1R0M		RoHS	1.0	±20%	280	0.050	2,550	1,650	1.0
BR C2518T1R5M		RoHS	1.5		230	0.080	2,100	1300	
BR C2518T2R2M		RoHS	2.2		200	0.120	1,800	1000	
BR C2518T3R3M		RoHS	3.3		150	0.175	1,450	860	
BR C2518T4R7M		RoHS	4.7		100	0.230	1,250	750	
BR C2518T6R8M		RoHS	6.8	±10% ±20%	45	0.280	1050	680	
BR C2518T100□		RoHS	10		20	0.350	890	610	
BR C2518T150□		RoHS	15		13	0.43	760	550	
BR C2518T220□		RoHS	22		10	0.56	640	490	
BR C2518T330□		RoHS	33		8	0.85	560	390	
BR C2518T470□		RoHS	47		6.5	1.45	410	300	
BR C2518T680□		RoHS	68		5.5	2.40	340	230	
BR C2518T101□		RoHS	100		4.5	3.60	300	190	

● 3225(1210)TYPE

Ordering code		EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±30%)	Rated current ※) [mA]		Measuring frequency [MHz]
							Saturation current Idc1	Temperture rise current Idc2	
BR L3225T2R7M		RoHS	0.27	±20%	390	0.022	4,500	2,850	7.96
BR L3225T3R6M		RoHS	0.36		350	0.025	4,300	2,750	
BR L3225T5R1M		RoHS	0.51		270	0.029	3,600	2,550	

Ordering code		EMS	Inductance [μH]	Inductance Tolerance	Self-resonant frequency [MHz](min.)	DC Resistance [Ω] (±20%)	Rated current ※) [mA]		Measuring frequency [MHz]
							Saturation current Idc1	Temperture rise current Idc2	
BR L3225T1R0M		RoHS	1.0	±20%	220	0.043	2,400	2,200	0.1
BR L3225T1R5M		RoHS	1.5		170	0.045	2,200	1,750	
BR L3225T2R2M		RoHS	2.2		150	0.065	1,850	1,600	
BR L3225T3R3M		RoHS	3.3		140	0.120	1,450	1,200	
BR L3225T4R7M		RoHS	4.7		120	0.180	1,300	1,000	
BR L3225T6R8M		RoHS	6.8	±10% ±20%	90	0.270	1,050	770	
BR L3225T100□		RoHS	10		70	0.350	900	700	
BR L3225T150□		RoHS	15		20	0.570	700	530	
BR L3225T220□		RoHS	22		13	0.690	550	470	
BR L3225T330□		RoHS	33		9	0.840	470	420	
BR L3225T470□		RoHS	47		7	1.00	420	390	
BR L3225T680□		RoHS	68		6	1.40	330	300	
BR L3225T101□		RoHS	100		5	2.50	270	250	

・Please specify the inductance tolerance code. (M or K)


※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

DC Bias characteristics

Measured by HP4285A

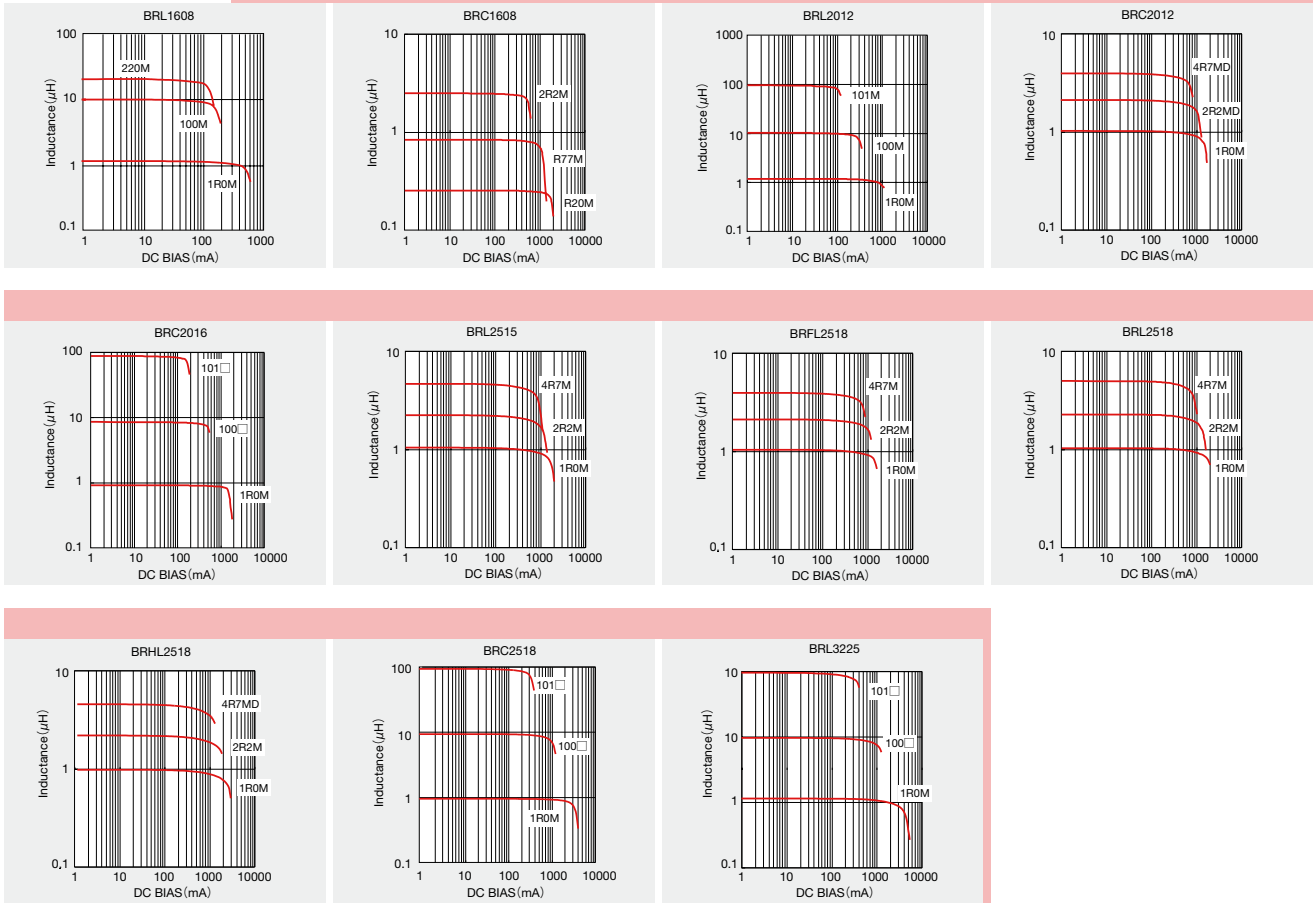


* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

① Minimum Quantity

Type	Standard Quantity [pcs]	
	Paper Tape	Embossed Tape
BR C1608	—	3,000
BR L1608	—	3,000
BR L2012	—	3,000
BR C2012	—	2,000
BR C2016	—	2,000
BR L2515	—	2,000
BR C2518	—	2,000
BRHL2518	—	2,000
BR L2518	—	3,000
BRFL2518	—	3,000
BR L3225	—	2,000


② Tape Material

Embossed tape
Card board carrier tape

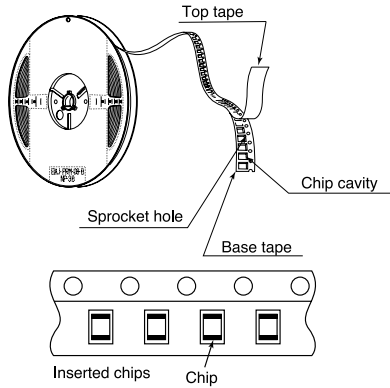

③ Taping dimensions


- Embossed Tape 8mm wide (0.315 inches wide)
- Card board carrier tape 8mm wide (0.315 inches wide)

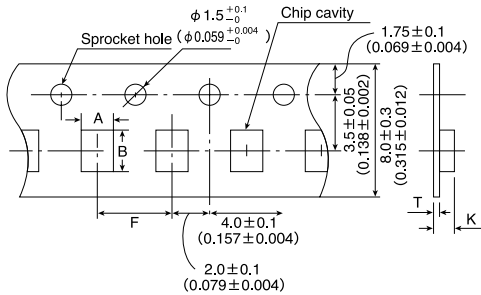


形式	Chip cavity		Insertion pitch	Tape thickness	
	A	B		T	K
BR L1608	1.10±0.05 (0.044±0.002)	1.90±0.05 (0.076±0.002)	4.0±0.1 (0.157±0.004)	0.20±0.05 (0.008±0.002)	0.85MAX (0.034MAX)
BR C1608	1.10±0.05 (0.044±0.002)	1.90±0.05 (0.076±0.002)	4.0±0.1 (0.157±0.004)	0.25±0.05 (0.01±0.002)	1.35MAX (0.054MAX)
BR L2012	1.45±0.10 (0.058±0.004)	2.20±0.10 (0.088±0.004)	4.0±0.1 (0.157±0.004)	0.25±0.05 (0.01±0.002)	1.2MAX (0.048MAX)
BR C2012	1.45±0.10 (0.058±0.004)	2.37±0.1 (0.095±0.004)	4.0±0.1 (0.157±0.004)	0.25±0.05 (0.01±0.002)	1.59MAX (0.064MAX)
BR C2016	1.9±0.20 (0.075±0.008)	2.2±0.20 (0.087±0.008)	4.0±0.1 (0.157±0.004)	0.3±0.05 (0.012±0.002)	2.15MAX (0.085MAX)
BR L2515	1.80±0.20 (0.072±0.008)	2.80±0.20 (0.112±0.008)	4.0±0.1 (0.157±0.004)	0.25±0.05 (0.01±0.002)	1.45MAX (0.058MAX)
BRFL2518	2.15±0.2 (0.085±0.008)	2.8±0.10 (0.112±0.004)	4.0±0.1 (0.157±0.004)	0.25±0.05 (0.01±0.002)	1.25MAX (0.05MAX)
BR L2518	2.3±0.1 (0.092±0.004)	2.8±0.10 (0.112±0.004)	4.0±0.1 (0.157±0.004)	0.3±0.05 (0.012±0.002)	1.5 MAX (0.060)
BRHL2518	2.10±0.1 (0.084±0.04)	2.80±0.1 (0.112±0.004)	4.0±0.1 (0.157±0.004)	0.3±0.05 (0.012±0.002)	1.70MAX (0.068MAX)
BR C2518	2.15±0.2 (0.085±0.008)	2.7±0.2 (0.107±0.008)	4.0±0.1 (0.157±0.004)	0.3±0.05 (0.012±0.002)	2.10MAX (0.083MAX)
BR L3225	2.80±0.10 (0.112±0.004)	3.5±0.10 (0.140±0.004)	4.0±0.1 (0.157±0.004)	0.25±0.05 (0.01±0.002)	1.75MAX (0.075)

Unit : mm (inch)

④ Leader and Blank portion

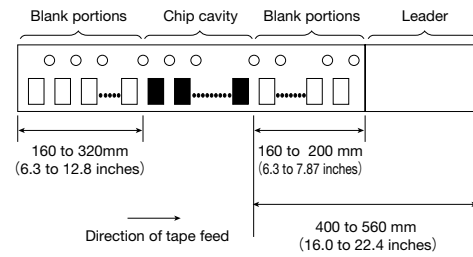


⑤ Reel size

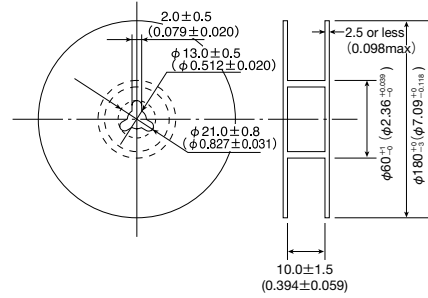




⑥ Top Tape Strength

The top tape requires a peel-off force of 0.2 to 0.7N in the direction of the arrow as illustrated below.

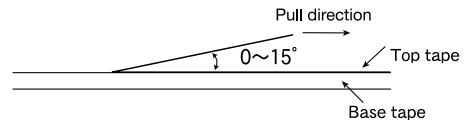

RELIABILITY DATA

Wound Chip power inductor (BR-series)

1. Operating Temperature Range																											
All of BR-series		-40~+105℃																									
【Test Method and Remarks】 Including self-generated heat																											
2. Storage Temperature Range(after soldering)																											
All of BR-series		-40~+85℃																									
【Test Method and Remarks】 Please refer the term of "7.Storage conditions" in Precautions.																											
3. Rated current																											
All of BR-series		Within the specified tolerance																									
4. Inductance																											
All of BR-series		Within the specified tolerance																									
【Test Method and Remarks】 LCR Meter : HP 4285A or equivalent, Measuring frequency : Specified frequency																											
5. DC Resistance																											
All of BR-series		Within the specified tolerance																									
【Test Method and Remarks】 DC ohmmeter : HIOKI 3227 or equivalent																											
6. Self resonance frequency																											
All of BR-series		Within the specified tolerance																									
【Test Method and Remarks】 Impedance analyzer/material analyzer : HP4291A or equivalent HP4191A, 4192A or equivalent																											
7. Temperature characteristic																											
All of BR-series		Inductance change : Within ±15%																									
【Test Method and Remarks】 Based on the inductance at 20℃ and Measured at the ambient of -40℃~+85℃.																											
8. Resistance to the bendability																											
All of BR-series		No damage.																									
【Test Method and Remarks】 The given sample is soldered on the board and then the back side of the board is pushed until it bends 2mm like the figure. Dimension of the board : 100×40×1.0mm (0.8mm thickness for 1608(0603) inductors) Material of the board : Glass-epoxy Thickness of soldering paste : 0.12mm																											
 																											
<table><tr><th>Type</th><th>A</th><th>B</th><th>C</th></tr><tr><td>1608</td><td>0.55</td><td>0.80</td><td>1.00</td></tr><tr><td>2012</td><td>0.65</td><td>0.90</td><td>1.40</td></tr><tr><td>2016</td><td>0.70</td><td>0.60</td><td>1.80</td></tr><tr><td>2518</td><td>0.65</td><td>1.50</td><td>1.95</td></tr><tr><td>3225</td><td>1.00</td><td>1.60</td><td>2.70</td></tr></table>				Type	A	B	C	1608	0.55	0.80	1.00	2012	0.65	0.90	1.40	2016	0.70	0.60	1.80	2518	0.65	1.50	1.95	3225	1.00	1.60	2.70
Type	A	B	C																								
1608	0.55	0.80	1.00																								
2012	0.65	0.90	1.40																								
2016	0.70	0.60	1.80																								
2518	0.65	1.50	1.95																								
3225	1.00	1.60	2.70																								
Unit : mm																											
9. Temperature characteristic																											
All of BR-series		No damage.																									
【Test Method and Remarks】 2012~ Applied force : 10N Duration : 10sec. 1608size Applied force : 5N Duration : 10sec.																											
10. Adhesion of terminal electrodes																											
All of BR-series		Not to removed from the board.																									
【Test Method and Remarks】 The given sample is soldered to the board and then it is kept for 5sec with 10N stress (5N for 1608(0603) inductors) like the figure.																											
																											
11. Resistance to vibration																											
All of BR-series		Inductance change : Within ±10% No significant abnormality in appearance.																									
【Test Method and Remarks】 The given sample is soldered to the board and then it is tested depending on the conditions of the following table.																											
<table><tr><td>Vibration Frequency</td><td colspan="3">10~55Hz</td></tr><tr><td>Total Amplitude</td><td colspan="3">1.5mm (May not exceed acceleration 196m/s²)</td></tr><tr><td>Sweeping Method</td><td colspan="3">10Hz to 55Hz to 10Hz for 1min.</td></tr><tr><td rowspan="3">Time</td><td>X</td><td colspan="2" rowspan="3">For 2 hours on each X, Y, and Z axis.</td></tr><tr><td>Y</td></tr><tr><td>Z</td></tr></table>				Vibration Frequency	10~55Hz			Total Amplitude	1.5mm (May not exceed acceleration 196m/s ²)			Sweeping Method	10Hz to 55Hz to 10Hz for 1min.			Time	X	For 2 hours on each X, Y, and Z axis.		Y	Z						
Vibration Frequency	10~55Hz																										
Total Amplitude	1.5mm (May not exceed acceleration 196m/s ²)																										
Sweeping Method	10Hz to 55Hz to 10Hz for 1min.																										
Time	X	For 2 hours on each X, Y, and Z axis.																									
	Y																										
	Z																										
Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs.																											

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.


Wound Chip power inductor (BR-series)

12. Solderability																			
All of BR-series	At least 90% area of the electrodes is covered by new solder.																		
【Test Method and Remarks】 The given sample is dipped into the flux and then it is tested depending on the conditions of the following table. Flux : Methanol solution containing rosin 25%.																			
<table><tr><td>Solder Temperature</td><td>245±5℃</td></tr><tr><td>Time</td><td>5±0.5 sec.</td></tr></table>	Solder Temperature	245±5℃	Time	5±0.5 sec.															
Solder Temperature	245±5℃																		
Time	5±0.5 sec.																		
13. Resistance to soldering heat																			
All of BR-series	Inductance change : Within ±10% No significant abnormality in appearance.																		
【Test Method and Remarks】 3 times reflow having the temperature profile of 5sec of 260 ⁺⁰ ₋₅ ℃ and 40sec of more than 230℃.																			
Test board thickness : 1.0mm Test board material : glass epoxy-resin																			
14. Thermal shock																			
All of BR-series	Inductance change : Within ±10% No significant abnormality in appearance.																		
【Test Method and Remarks】 The given sample is soldered to the board and then its Inductance is measured after 100cycles of the following conditions.																			
<table><tr><td colspan="3">Conditions of 1 cycle</td></tr><tr><td>Step</td><td>Temperature (℃)</td><td>Duration (min)</td></tr><tr><td>1</td><td>-40±3</td><td>30±3</td></tr><tr><td>2</td><td>Room temperature</td><td>Within 3</td></tr><tr><td>3</td><td>+85±2</td><td>30±3</td></tr><tr><td>4</td><td>Room temperature</td><td>Within 3</td></tr></table>		Conditions of 1 cycle			Step	Temperature (℃)	Duration (min)	1	-40±3	30±3	2	Room temperature	Within 3	3	+85±2	30±3	4	Room temperature	Within 3
Conditions of 1 cycle																			
Step	Temperature (℃)	Duration (min)																	
1	-40±3	30±3																	
2	Room temperature	Within 3																	
3	+85±2	30±3																	
4	Room temperature	Within 3																	
15. Damp heat																			
All of BR-series	Inductance change : Within ±10% No significant abnormality in appearance.																		
【Test Method and Remarks】 The given sample is soldered to the board and then it is kept at the following conditions.																			
<table><tr><td>Temperature</td><td>60±2℃</td></tr><tr><td>Humidity</td><td>90~95%RH</td></tr><tr><td>Time</td><td>1000 hours.</td></tr></table>	Temperature	60±2℃	Humidity	90~95%RH	Time	1000 hours.													
Temperature	60±2℃																		
Humidity	90~95%RH																		
Time	1000 hours.																		
Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs.																			
16. Loading under damp heat																			
All of BR-series	Inductance change : Within ±10% No significant abnormality in appearance.																		
【Test Method and Remarks】 The given sample is soldered to the board and then it is kept at the following conditions.																			
<table><tr><td>Temperature</td><td>60±2℃</td></tr><tr><td>Humidity</td><td>90~95%RH</td></tr><tr><td>Applied current</td><td>Rated current</td></tr><tr><td>Time</td><td>1000hours.</td></tr></table>	Temperature	60±2℃	Humidity	90~95%RH	Applied current	Rated current	Time	1000hours.											
Temperature	60±2℃																		
Humidity	90~95%RH																		
Applied current	Rated current																		
Time	1000hours.																		
Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs.																			
17. Low temperature life test																			
All of BR-series	Inductance change : Within ±10% No significant abnormality in appearance.																		
【Test Method and Remarks】 The given sample is soldered to the board and then it is kept at the following conditions.																			
<table><tr><td>Temperature</td><td>-40±2℃</td></tr><tr><td>Duration</td><td>1000hours</td></tr></table>	Temperature	-40±2℃	Duration	1000hours															
Temperature	-40±2℃																		
Duration	1000hours																		
Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs.																			
18. High temperature life test																			
All of BR-series	Inductance change : Within ±10% No significant abnormality in appearance.																		
【Test Method and Remarks】 The given sample is soldered to the board and then it is kept at the following conditions.																			
<table><tr><td>Temperature</td><td>85±2℃</td></tr><tr><td>Duration</td><td>1000hours</td></tr></table>	Temperature	85±2℃	Duration	1000hours															
Temperature	85±2℃																		
Duration	1000hours																		
Recovery : At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs.																			
19. Standard conditions																			
All of BR-series	Standard test condition : Unless otherwise specified, temperature is 20±15℃ and 65±20%of relative humidity. When there is any question concerning measurement result: In order to provide correlation data, the test shall be condition of 20±2℃ of temperature, 65±5% relative humidity. Inductance is in accordance with our measured value.																		

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

PRECAUTIONS

Wound Chip power inductor (BR-series)

1. Circuit Design	
Precautions	◆Operating Ambient The products are premised on the usage for the general equipments like the office supply equipment, the telecommunications systems, the measuring equipment, the household equipment and so on. Please ask to TAIYO YUDEN's sales person in advance, if you need to apply them to the equipments or the systems which might have any influences for the human body, the property, like the traffic systems, the safety equipment, the aerospace systems, the nuclear control systems, the medical equipment and so on.
2. PCB Design	
Precautions	◆Land pattern design 1. Please refer to a recommended land pattern.
Technical considerations	◆Land pattern design Surface Mounting 1. The conditions of the picking and placing should be checked in advance. 2. The products are only for reflow soldering.
3. Considerations for automatic placement	
Precautions	◆Adjustment of mounting machine 1. Excessive physical impact should not be imposed on the products for picking and placing onto the PC boards. 2. Mounting and soldering conditions should be checked in advance.
Technical considerations	◆Adjustment of mounting machine The products might be broken if too much stress is given for the picking and placing.
4. Soldering	
Precautions	◆Reflow soldering 1. Please apply our recommended soldering conditions on the specification as much as possible. 2. The products are only for reflow soldering. 3. Please do not give any stress to a product until it returns in room temperature after reflow soldering. ◆Lead free soldering 1. Please check the adhesion, the solder temperature, the solderability and the shape of solder fillet if the solder that is not in the specification is used. ◆Recommended conditions for using a soldering iron (NR10050 Type) Touch a soldering iron to the land pattern not to the product directly. The temperature of a soldering iron is less than 350degC. The soldering is for 3 seconds or less.
Technical considerations	◆Reflow soldering 1. The product might break or might make the tombstoning, if the soldering conditions are too far from our recommended conditions. 
5. Cleaning	
Precautions	◆Cleaning conditions 1. Please don't wash by the ultra-sonic waves.
Technical considerations	◆Cleaning conditions 1. Washing by the ultra-sonic waves might break the product.
6. Handling	
Precautions	◆Handling 1. Keep the product away from any magnets. ◆Cutting the PC boards 1. Please don't give any stress of the bending or the twisting for the cutting process of PC boards. 2. Please don't give any shock and stress to the products in transportation. ◆Mechanical considerations 1. Please don't give too much shock to the product. 2. Please don't give any shock and stress to the products in transportation. ◆The stress for picking and placing 1. Please don't give any shock into an exposed ferrite core. ◆Packing 1. Please don't pile the packing boxes up as much as possible.
Technical considerations	◆Cutting the PC boards 1. Please don't give the bending stress or the twisting stress to the products because they might break in such cases. ◆Mechanical considerations 1. The mechanical shock might break the products. 2. The products might break depending on the handling in transportation. ◆Pick-up pressure 1. The electrical characteristics of the products might be shifted by too much physical shock and stress. ◆Packing 1. The products and the tape might break, if the packing boxes are piled up.
7. Storage conditions	
Precautions	◆Storage 1. The packing boxes can be kept at the ambient which the temperature is from 0 to 40degC and the humidity is less than 70%. 2. The ambient temperature of less than 30degC is recommended not to get the tape and the solderability worse. 3. Please solder the products by a half year after they have been shipped. Otherwise please use them after checking the solderability in advance.
Technical considerations	◆Storage 1. The ambient of high temperature or high humidity might accelerate to make the solderability and the tape worse.

* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.