



Ferrule

T&B Catalog Number:

F4004

UPC Number:

78621072962

Status:


Active

Description:

Polypropylene-Insulated Ferrule, Total Length .416 Inches/10.5mm, Pin Length .236 Inches/6.0mm, Pin Diameter .031 Inches/.8mm, Base Diameter .079 Inches/2.0mm, Wire Range #26 AWG/.14mm², Color Gray, Copper, Tin Plated

Features

Ferrules ensure reliable electrical connections when terminating conductors in screw clamp terminal blocks.

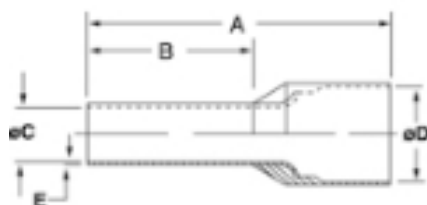

General

Ferrule Type	Insulated
Insulation Type	Polypropylene
Material	Copper
Finish	Electro -Tin Plated
Color	Gray
Wire Range	26
Wire Size (mm ²)	.14

Dimension Information

A (mm)	10.5
B (mm)	6.0
Diameter C (inches)	.031
Diameter C (mm)	0.8
Diameter D (inches)	.079
Diameter D (mm)	2.0
E (mm)	.25
A (inches)	.413
B (inches)	.236
E (inches)	.010

Specifications

Temperature Rating	105°C
Flammability Rating	94HB

Tooling

Tool Charts	Available on Website
Application Tools	T3, ERG4
Recommended Tool	T3, ERG4

Packaging

T&B Order Multiple	500
T&B Inner Pack	500
Package in Units	10000
T&B Sold in UOM	Each
T&B Weight Per UOM	0.63 lbs. per 1000

Application Support

T&B Sales Drawings	wsd-000402
Overview	Available on Website
Wire Guide Tables	Available on Website

Notes

Ferrule dimensions conform to DIN 46228, Part 4.

Certifications

RoHS Compliance

Yes

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email: techsupport@tnb.com