

ANALOG PANEL METERS FROM TRIPLETT CORPORATION.



**Quality Analog Panel Instrumentation
with Sizes from 1/2" to 8 1/2" in a
Variety of Shapes and Ranges.**

**WE HAVE THE METER
FOR YOUR APPLICATION.**



TRIPLETT CORPORATION
Quality and Technology for Tomorrow

CONTENTS

ORDERING GUIDE	2
INSTRUMENT CHARACTERISTICS	3
CASE STYLES & CONSTRUCTION	4
PANEL METER ACCESSORIES	5
1 1/2" METERS	5
2 1/2" METERS	6 & 7
3 1/2" METERS	8 & 9
4 1/2" METERS	10 & 11
5 1/2" METERS	12 & 13
6 1/2", 7 1/2", 8 1/2" METERS	14 & 15
EDGEWISE SERIES	16 & 17
RUGGEDIZED SERIES	18
G SERIES OPTIONS	19

ORDERING GUIDE

PLEASE READ BEFORE PLACING ORDER

▲ WHEN ORDERING PLEASE SPECIFY:

Model, Range, Type and Catalog Number.

EXAMPLE:

Model 320-G, 0-50, DC Millivoltmeter, 152-0112

On DC Microammeters, please specify whether pivot and jewel or taut band type. Catalog price includes all mounting hardware.

▲ POINTERS

Lance type pointers are standard on all G, GL, and GL/B Series panel instruments. Spade pointers are standard on all Phenolic Series panel instruments.

▲ INSTRUMENTS

DC Instruments are the d'Arsonval type with linear scales, extra light moving coil, rugged construction, Bar-Ring Magnet and one piece diecast frames. AC Instruments are either the moving iron vane type with viscous damping and light moving parts or the rectifier type.

Two methods of supporting the coil for rotation are employed. One method is the taut band system while the other is the pivot and jewel. In all taut band movements, the coil is suspended on ligament bands. All pivot and jewel movements have selected spring back jewel bearings with highly polished and specially treated pivots.

White enameled metal dials, molded zero adjusters and ceramic pointer stops are standard.

▲ DC AMMETER SHUNTS

DC Ammeters above 50 Amperes require a basic 0-50 DC Millivolt Instrument with an external DC Ammeter Shunt. The instrument dial reads in DC Amperes and ranges shown on page 5 are standard.

▲ AC CURRENT TRANSFORMERS

AC Ammeters above 50 Amperes require a basic 0-5 Ampere Instrument with an external AC Current Transformer. The instrument dial reads in AC Amperes and ranges shown on page 5 are standard.

▲ HIGH VOLTAGE MULTIPLIER BOXES

External High Voltage Multiplier Boxes are required for 1 1/2" and 2 1/2" DC Voltmeters 500V and up, 3 1/2" DC Voltmeters 750V and up, 4 1/2" DC Voltmeters 1000V and up. All AC Voltmeters 500V and up also require Multiplier Boxes. All DC Voltmeters with Multiplier Boxes are 2000 Ohms per Volt. The AC Voltmeters are 125 Ohms per Volt. Ranges shown on page 5 are standard.

NOTE: For special meter applications or ranges not listed in this catalog, please contact your Triplet Sales and Service Modification Center, Representative or the Factory. (1-800-874-7538 outside Ohio)

All Triplet Panel Instruments meet or exceed ANSI C39.1 Performance Standards and applicable portions of ANSI C39.5 Safety Standards.

INSTRUMENT CHARACTERISTICS

The following is a listing of the standard instrument characteristics and/or tolerances for standard DC Bar Ring & AC Iron Vane Instruments. All characteristics and tolerances are predicated on the instrument being mounted in its normal position at a temperature of 25°C (sine wave for AC types). This listing is not intended to limit the characteristics or tolerances: many variations of characteristics and tolerances can be supplied on special order. Consult factory stating complete details of your application and desired characteristics.

CHARACTERISTIC	DIRECT CURRENT TYPES		AC IRON VANE TYPES	
	CURRENT	VOLTAGE	CURRENT	VOLTAGE
ACCURACY	±2%	±2%	±2%	±2%
SCALE LINEARITY ●	linear	linear	non-linear	non-linear
TRACKING	±3%	±3%	±3%	±3%
REPEATABILITY - Pivot Type ▲ - Taut Band Type	±2% ±1/2%	±2% ±1/2%	±2%	±2%
FRICTION - Pivot Type ▲ - Taut Band Type	±1% negligible	±1% negligible	±1%	±1%
BALANCE ▲ - 50 ua & above - below 50 ua	±1% ±2%	±1% ±2%	±1%	±1%
RESISTANCE or SENSITIVITY - below 10 volts - above 10 volts	±20%	±5% ±5%	±20%	±20% ±5%
MAXIMUM OVERSHOOT	20%	20%	30%	30%
RESPONSE TIME (In High Impedance Circuit) - above 50 ua - below 50 ua	1.5 sec max 3 sec max	1.5 sec max 3 sec max	1.5 sec max	1.5 sec max
CALIBRATION FREQUENCY ■			60Hz	60Hz
FREQUENCY RANGE (for ±1% deviation from value @ 60 Hz)			25-1000Hz	25-133Hz
OVERLOAD CAPACITY (1 sec) 0-100 volts 101 volts & up	1000%	1000% 200%	1000%	1000% 200%
OVERLOAD CAPACITY (continuous) % of rated value	150%	120%	150%	120%
TEMPERATURE INFLUENCE (±10°C from 25°C)	±1%	±1%	±1%	±1%


- LINEARITY applies to spacing of scale divisions only. DC types at ±2% accuracy have linear scale divisions, therefore, scales are interchangeable on all meters. AC Iron Vane Types at ±2% have non-linear scale divisions, however, scales are interchangeable on meters of a given range and type. All ±1/2% and ±1% meters have non-linear scale divisions and the scales are not interchangeable (in some cases, interchangeable scales may be supplied – consult factory stating requirements)
- ▲ Repeatability, friction and balance tolerances are typical specifications - specific values are dependent on meter size, torque, current, etc.
- AC Iron Vane Types can also be supplied calibrated for use at other frequencies on special order.

All Triplett Panel Instruments meet or exceed ANSI C39.1 performance standards and applicable portions of ANSI C39.5 safety standards.

ALL SPECIFICATIONS SUBJECT TO CHANGE.

CASE STYLE & CONSTRUCTION

G SERIES

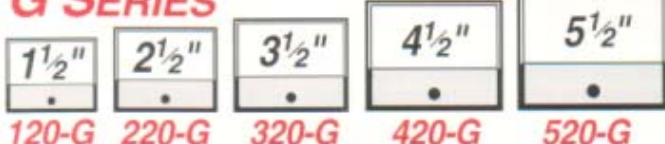

CASE & COMPOSITION:
Thermoplastic front and back, four stud mounting.

OPTIONS AVAILABLE:
Half-Bezel for behind panel mounting, Illumination Kit and Shallow Barrel (page 19)

GL SERIES



CASE & COMPOSITION:
Glass window, flat black thermosetting plastic case, two stud mounting except 220-GL and 820-GL have four stud mounting only. 820-GL contains contoured base with sealed meter movement permitting utilization of lower part of front for mounting controls, switches, etc.

OPTIONS AVAILABLE: Three and four stud mounting for 320-GL, four stud mounting for 420-GL and 520-GL.

GL/B SERIES




320-GL/B 420-GL/B 520-GL/B



CASE & COMPOSITION:
Glass window, flat black thermosetting plastic case. Integral bezel provides behind the panel mounting. Requires minimum panel space for better utilization of panel area.

R SERIES




420-R

CASE & COMPOSITION:
Thermoplastic front and thermosetting plastic back with flat scale arc.

PHENOLIC SERIES

CASE & COMPOSITION: Glass window, thermosetting plastic case, four stud mounting for Models 227-T, 327-T, 420, 626 & 726, three stud mounting for Models 221-T & 321-T.

OPTIONS AVAILABLE: Illumination available for certain models— Please Contact Factory.




227-T

327-T



221-T


321-T



420



626



726

EDGEWISE SERIES



.5-E

120

220-E

320-E

420-E



320-ED
320-EG

CASE & COMPOSITION:

All case housing materials selected for their excellent electrical characteristics and strengths. The .5-E has a Thermoplastic front and steel back. All models have thermoplastic windows except Models 320-ED & 320-EG which have sealed glass windows. Model 320-EG* is constructed to withstand rough environmental and industrial applications. Standard meter; horizontal mounting, barrel down, zero left (except zero center models)

OPTIONS AVAILABLE: Bezels available for Models 220-E, 320-E, 420-E. Models 320-E, 320-EG and 420-E can be mounted from front or rear of panel. Also available for vertical mounting, barrel right, zero bottom.

* Includes steel mounting brackets.

RUGGEDIZED SERIES



127-HR



221-HR



321-HR

CASE & COMPOSITION:
Thermoplastic front, steel back.

THE FAMOUS TRIPLETT BAR-RING® SELF-SHIELDED CONSTRUCTION

Not affected by magnetic panels or substantially by stray magnetic fields.

PANEL METER ACCESSORIES

Ampere Range	Max. Dimensions in Inches			Catalog Number
	Width	Depth	Height	
0-50	6.000	1.250	1.550	91-604
0-100	6.000	1.250	1.550	91-605
0-150	6.000	1.250	1.550	91-606
0-200	6.000	1.250	1.550	91-607
0-250	5.500	1.500	1.250	91-593
0-300	5.500	1.500	1.250	91-594
0-500	7.250	1.250	1.200	91-608
0-750	7.250	2.000	1.200	91-610
0-1000	9.062	3.000	1.700	91-585

DC AMMETER SHUNTS

Requires a basic 0-50 Millivolt DC Instrument of desired size and style.
Dial reads "DC Amperes"
Supplied with 5' leads.



Ampere Range	Max. Ratio	Max. Dimensions in Inches			Catalog Number
		ID.	O.D.	Width	
0-75	75:5	1.250	3.875	1.000	23-66
0-100	100:5	1.250	3.560	1.000	7099
0-150	150:5	1.250	3.560	1.000	2446-20
0-200	200:5	1.250	3.560	1.000	7100
0-300	300:5	1.250	3.560	1.000	7093
0-500	500:5	1.250	3.560	1.000	7092

NOTE: All ratios are defined with one primary turn.
Frequency 25-400 Hz

AC AMMETER CURRENT TRANSFORMERS

Requires a basic 0-5 Ampere AC Instrument of desired size and style.
Dial reads "AC Amperes"
Supplied with 24" leads.



Voltage Range	Max. Dimensions in Inches			Catalog Number
	Width	Depth	Height	
0-500 DC	4.797	1.593	3.500	2543-01-01
0-750 DC	4.797	1.593	3.500	2543-01-02
0-1000 DC	4.797	1.593	3.500	2543-01-03
0-5000 DC	4.797	1.593	3.500	2543-01-06
0-500 AC	4.797	1.593	3.500	2543-01-07

EXTERNAL HIGH VOLTAGE MULTIPLIER BOXES

Required for 1 1/2" and 2 1/2" DC Voltmeters 500V and up, 3 1/2" DC Voltmeters 750V and up, 4 1/2" DC Voltmeters 1000V and up, and all AC Voltmeters 500V and up. All DC Voltmeters with Multiplier Boxes are 2000 Ohms per Volt. AC Voltmeters are 125 Ohms per Volt.



DC RANGES

1 1/2"

DC MICROAMMETERS (Pivot & Jewel)

Range	Ω Res.	120-G
0-50	4000	152-0977
0-100	1170	152-0979
0-200	400	152-0981
0-500	210	152-0984

DC MICROAMMETERS (Taut Band)

Range	Ω Res.	120-G
0-50	2300	152-0992
0-100	825	152-0994

DC MILLIAMMETERS

Range	Ω Res.	120-G
0-1	.55	152-0956
0-5	8.5	152-0961
0-10	3.1	152-0962
0-25	2.0	152-0965
0-50	1.0	152-0967
0-100	.50	152-0969
0-200	.25	152-0971
0-500	.10	152-0974

DC AMMETERS

Range	120-G
0-1	152-0938

DC MILLIVOLTMETERS


Range	Ω Res.	120-G
0-50	6.7	152-0927

DC VOLTMETERS (1000 Ohms/Volt)

Range	Ω / Volt	120-G
0-5	1000	152-0905
0-10	1000	152-0906
0-25	1000	152-0909
0-30	1000	152-0910
0-50	1000	152-0911
0-100	1000	152-0913
0-150	1000	152-0914



120-G

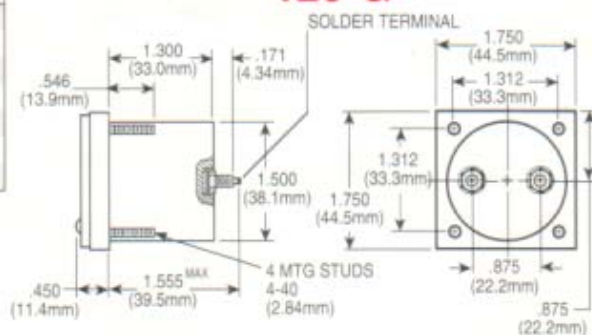

For additional ranges, please contact factory.

Model 120-G Scale Length: 1.48"

DC RANGES

DC MICROAMMETERS (Pivot & Jewel)

Range	Ω Res.	220-G	220-GL	221-T	227-T
0-50	2300	152-0143 *	52-7551	152-1473	152-1542
0-100	825	152-0145	52-7552	152-1474	152-1543
0-200	360	152-0147	52-7643	152-1475	152-1544
0-500	156	152-0150	52-7644	152-1476	152-1545

DC MICROAMMETERS (Taut Band)

Range	Ω Res.	220-G	220-GL	221-T	227-T
0-5	15,000	152-1155	52-7645	152-1477	152-1546
0-10	7,500	152-0226	52-7646	152-1478	152-1547
0-20	2,500	152-0228	52-7647	152-1479	152-1548
0-50	825	152-0231	52-7648	152-1480	152-1549
0-100	360	152-0247	52-7649	152-1481	152-1550
0-200	156	152-0249	52-7650	152-1482	152-1551
0-500	40	152-0252	52-7651	152-1483	152-1552
0-1000	12.5	152-1270	52-7652	152-1484	152-1576
50-0-50	360	152-1236	52-7653	152-1485	152-1553
100-0-100	156	152-1237	52-7654	152-1486	152-1554
500-0-500	12.5	152-1238	52-7655	152-1487	152-1555

DC MILLIAMMETERS

Range	Ω Res.	220-G	220-GL	221-T	227-T
0-1	55	152-0152 *	52-7548	152-1425	152-1494
0-5	8.5	152-0157	52-7656	152-1428	152-1497
0-10	3.1	152-0159	52-7657	152-1429	152-1498
0-25	2.0	152-0162 *	52-7658	152-1431	152-1500
0-50	1.0	152-0164	52-7659	152-1432	152-1501
0-100	.50	152-0166 *	52-7660	152-1434	152-1503
0-200	.25	152-0168	52-7661	152-1436	152-1505
0-500	.10	152-0171	52-7662	152-1440	152-1509

DC AMMETERS

Range	Ω Res.	220-G	220-GL	221-T	227-T
0-1	—	152-0173 *	52-7663 *	152-1443	152-1512
0-5	—	152-0176	52-7664	152-1445	152-1514
0-10	—	152-0177 *	52-7665	152-1446	152-1515
0-30	—	152-0182 *	—	152-1449	152-1518
0-50	—	—	—	152-1450	152-1519

A basic 0-50 Millivolt DC instrument; dial reads "DC AMPERES", shunt not included

0-50	—	52-4142	52-7666	52-7435	52-7438
0-100	—	152-1183	52-7667	52-5191	52-5773
0-150	—	152-1184	52-7668	52-5706	52-5732
0-200	—	152-1185	52-7669	52-7060	52-5463
0-250	—	152-1186	52-7670	52-5700	52-7439
0-300	—	152-1187	52-7671	52-5747	52-7440
0-500	—	152-1188	52-7672	52-5321	52-7441
0-750	—	152-1189	52-7673	52-7436	52-7442
0-1000	—	152-1190	52-7674	52-7437	52-7443

DC MILLIVOLTMETERS

Range	Ω Res.	220-G	220-GL	221-T	227-T
0-50	6.7	152-0183	52-7549	152-1451	152-1520

DC VOLTMETERS (1000 Ohms/Volt)

Range	Ω / Volt	220-G	220-GL	221-T	227-T
0-5	1000	152-0193	52-7675	152-1456	152-1525
0-10	1000	152-0195 *	52-7676 *	152-1457	152-1526
0-25	1000	152-0198	52-7677	152-1459	152-1528
0-30	1000	152-0199 *	52-7678	152-1460	152-1529
0-50	1000	152-0200	52-7553	152-1461	152-1530
0-100	1000	152-0202	52-7679	152-1462	152-1531 *
0-150	1000	152-0203	52-7680	152-1463	152-1532

AC RANGES

AC MILLIAMMETERS

Range	Ω Res.	230-G	230-GL	231-S	237-S
0-10	4000	153-0142	53-1956	153-0369	153-0398
0-50	120	153-0147	53-1957	153-0372	153-0401
0-100	40	153-0149	53-1958	153-0373	153-0402
0-250	5.9	153-0152	53-1959	153-0375	153-0404
0-500	1.55	153-0155	53-1960	153-0376	153-0405

AC AMMETERS

Range	Ω Res.	230-G	230-GL	231-S	237-S
0-1	.38	153-0001 *	53-1961	153-0348	153-0377
0-2	.092	153-0003	53-1962	153-0349	153-0378
0-3	.039	153-0005 *	53-1963	153-0350	153-0379
0-5	.014	153-0006 *	53-1964	153-0351	153-0380
0-10	.004	153-0065 *	53-2085	153-0352	153-0381
0-15	.003	153-0066 *	53-2086	153-0353	153-0382
0-25	.002	153-0068 *	53-2087	153-0354	153-0383
0-30	.001	153-0069 *	—	153-0355	153-0384
0-50	.00035	153-0070 *	53-2088	153-0356	153-0385 *

A basic 0-5 Ampere instrument; dial reads "AC AMPERES", transformer not included

0-75	—	53-1099	53-1965	53-1364	53-1408
0-100	—	53-1363	53-1966	53-1302	53-1259
0-150	—	53-1350	53-1967	53-1319	53-1839
0-200	—	53-1529	53-1968	53-1588	53-1761
0-300	—	53-1586	53-1970	53-1253	53-1902
0-500	—	53-1814	53-1971	53-1901	53-1787

AC VOLTMETERS


Range	Ω / Volt	230-G	230-GL	231-S	237-S
0-10	10	153-0072	53-1972	153-0360	153-0389
0-50	50	153-0077	53-1973	153-0363	153-0392
0-100	91	153-0022	53-1974	153-0364	153-0393
0-150	125	153-0023 *	53-1975	153-0365	153-0394
0-250	144	153-0025	—	153-0366	153-0395
0-300	144	153-0026 *	—	153-0367	153-0396
0-500	125	153-0214	—	153-0368	153-0397

- Reads 0-1 Milliampere
- ▲ Units are self-contained
- External multiplier box is included with unit
- * Models which are normally stocked by Distribution

For additional ranges, please contact factory.


2½" METER DIMENSIONS

Model 220-G
Model 230-G AC Under 10 Amp & AC Voltmeters

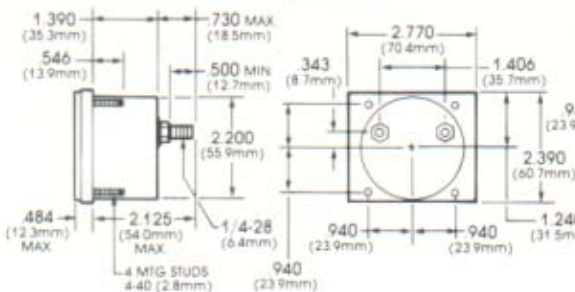

Model 220-G Scale Length: 2.48"

Model 230-G AC 10 Amp & Above




Model 230-G Scale Length: 2.11"




220-G / 230-G

Model 220-GL
Model 230-GL AC Under 10 Amp & AC Voltmeters

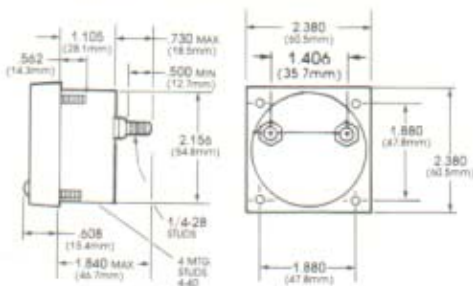

Model 220-GL Scale Length: 2.24"

Model 250-GL AC 10 Amp & Above

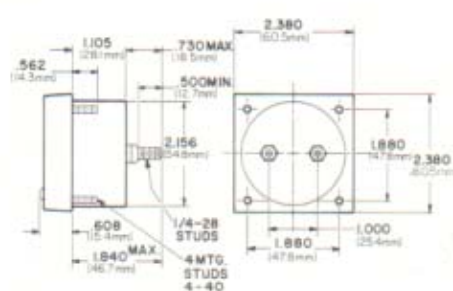


Model 230-GL Scale Length: 1.90"



220-GL / 230-GL


Model 221-T
Model 221-S AC Under 10 Amp & AC Voltmeters

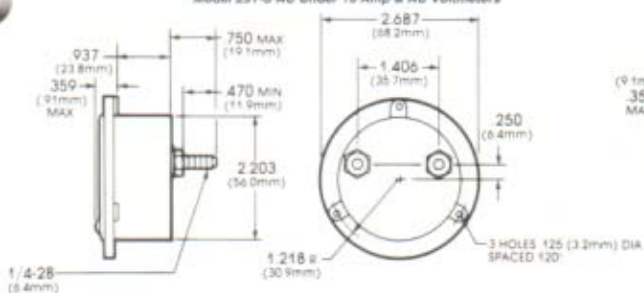

Illuminated Models below 500µA, AC Models and Taut Band Models have 1.312" (33.3mm) Case Depth.

Model 221-T Scale Length: 1.76"

Model 231-S AC 10 Amp & Above

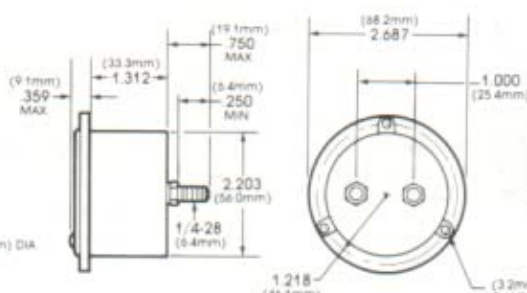


3 HOLE .125 DIA
SPACED .20

Model 231-S Scale Length: 1.58"



221-T / 231-S


Model 227-T
Model 237-S AC Under 10 Amp & AC Voltmeters

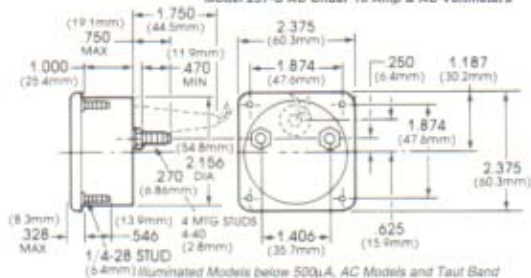

*) Illuminated Models below 500µA, AC Models and Taut Band Models have 1.375" (34.9mm) Case Depth.

Model 227-T Scale Length: 1.76"

Model 237-S AC 10 Amp & Above

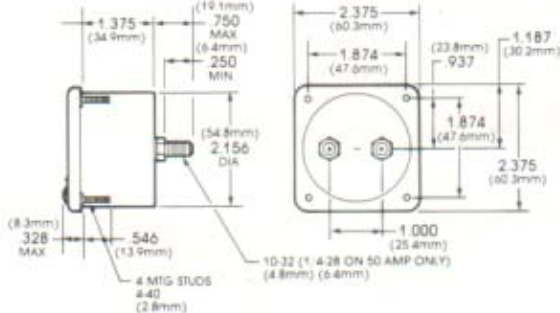

Model 237-S Scale Length: 1.58"



227-T / 237-S

DC RANGES

3 1/2"

AC RANGES

DC MICROAMMETERS (Pivot & Jewel)

Range	Ω Res.	320-G	320-GL	320-GL/B	321-T	327-T
0-50	2300	152-0072 *	152-2135	152-2148	152-1642 *	152-1730
0-100	825	152-0074	152-2138 *	152-2149	152-1643	152-1731
0-200	360	152-0076	152-2137	152-2150	152-1644	152-1732
0-500	156	152-0079	152-2138	152-2151	152-1645	152-1733

DC MICROAMMETERS (Taut Band)

Range	Ω Res.	320-G	320-GL	320-GL/B	321-T	327-T
0-5	15,000	52-3071	152-2054	152-2088	152-1650	152-1738
0-10	7,500	152-0233	152-2055	152-2089	152-1651	152-1739
0-20	2,500	152-0235	152-2056	152-2090	152-1652	152-1740
0-50	825	152-0238	152-2057	152-2091	152-1653	152-1741
0-100	360	152-0254	152-2058	152-2092	152-1654	152-1742
0-200	156	152-0256	152-2059	152-2093	152-1655	152-1743
0-500	40	152-0259	152-2060	152-2094	152-1656	152-1744
0-1000	12.5	152-1290	152-2061	152-2222	152-1657	152-1745
50-0-50	360	152-0357	152-2182	152-2357	152-1658	152-1746
100-0-100	156	152-0358	152-2183	152-2358	152-1659	152-1747
500-0-500	12.5	152-0359	152-2184	152-2359	152-1660	152-1748
40-0-40 NULL	1,700	52-3744	52-6178	52-6642	—	—

DC MILLIAMMETERS

Range	Ω Res.	320-G	320-GL	320-GL/B	321-T	327-T
0-1	55	152-0081	152-2047 *	152-2106	152-1594	152-1682
0-5	8.5	152-0086	152-2050	152-2199	152-1597	152-1685
0-10	3.1	152-0088 *	152-2051	152-2200	152-1598	152-1686
0-25	2.0	152-0091	152-2053	152-2202	152-1600	152-1688
0-50	1.0	152-0093	152-2121	152-2283	152-1601	152-1689
0-100	.50	152-0095	152-2123	152-2285	152-1603	152-1691
0-200	.25	152-0097	152-2125	152-2287	152-1605	152-1693
0-500	.10	152-0100	152-2129	152-2291	152-1609	152-1697

DC AMMETERS

Range	Ω Res.	320-G	320-GL	320-GL/B	321-T	327-T
0-1	▲	152-0102	152-2230	152-2262	152-1612	152-1700
0-5	▲	152-0105 *	152-2232 *	152-2264	152-1614	152-1702
0-10	▲	152-0106	152-2233	152-2265	152-1615	152-1703
0-30	▲	152-0110	152-2236	152-2268	152-1618	152-1706
0-50	▲	—	152-2237	152-2269	152-1619	152-1707
A basic 0-50 Millivolt DC instrument; dial reads "DC AMPERES"; shunt not included						
0-50	—	52-3156	52-7446	52-7451	52-6128	52-7445
0-100	—	152-1294	52-6110 *	52-7452	52-4728	52-4934
0-150	—	152-1293	52-6381	52-7453	52-5005	52-4968
0-200	—	152-1299	52-7447	52-7454	52-4729	52-4935
0-250	—	152-1312	52-7448	52-7455	52-5192	52-4936
0-300	—	52-3095	52-6108	52-7456	52-5967	52-4969
0-500	—	52-4426	52-6109	52-7457	52-5851	52-4970
0-750	—	152-1345	52-7449	52-7458	52-6083	52-6734
0-1000	—	152-1171	52-7450	52-7459	52-7444	52-6735

DC MILLIVOLTMETERS

Range	Ω Res.	320-G	320-GL	320-GL/B	321-T	327-T
0-50	6.7	152-0112	152-2258	152-2331	152-1620	152-1708
0-100	13.5	152-0113	152-2259	152-2332	152-1621	152-1709
0-150	20.2	152-0114	152-2260	152-2333	152-1622	152-1710

DC VOLTMETERS (1000 Ohms/Volt)

Range	Ω/Volt	320-G	320-GL	320-GL/B	321-T	327-T
0-5	1000	152-0122	152-2134	152-2360	152-1625	152-1713
0-10	1000	152-0124	152-2077	152-2361	152-1626	152-1714
0-25	1000	152-0127	152-2079	152-2362	152-1628	152-1716
0-30	1000	152-0128	152-2080	152-2363	152-1629	152-1717
0-50	1000	152-0129	152-2223	152-2185	152-1630	152-1718
0-100	1000	152-0131	152-2224	152-2186	152-1631	152-1719
0-150	1000	152-0132	152-2225	152-2187	152-1632	152-1720
0-200	1000	152-0133	152-2226	152-2188	152-1633	152-1721 *
0-250	1000	152-0134	152-2227	152-2189	152-1634	152-1722
0-300	1000	152-0135	152-2228	152-2190	152-1635	152-1723
0-500	1000	152-0136	152-2229	152-2191	152-1636	152-1724
0-1000	■	2000	152-0138	152-2254	52-6656	152-1726
0-5000	■	2000	152-0142	152-2257	52-6655	152-1729

AC MILLIAMMETERS

Range	Ω Res.	330-G	330-GL	330-GL/B	331-S	337-S
0-10	4000	153-0107	153-0614	153-0628	153-0486	153-0515
0-50	120	153-0112	153-0617	—	153-0489	153-0518
0-100	40	153-0128	153-0618	153-0632	153-0490	153-0519
0-250	5.9	153-0131	153-0620	—	153-0492	153-0521
0-500	1.55	153-0133	153-0621	153-0635	153-0493	153-0522

AC AMMETERS

Range	Ω Res.	330-G	330-GL	330-GL/B	331-S	337-S
0-1	▲	.38	153-0008 *	153-0605	153-0636	153-0465
0-2	▲	.092	153-0010	153-0606	153-0637 *	153-0466
0-3	▲	.039	153-0012	153-0607	153-0638	153-0467
0-5	▲	.014	153-0013	153-0608 *	153-0639	153-0468
0-10	▲	.004	153-0058 *	153-0609	—	153-0469
0-15	▲	.003	153-0059	153-0610	—	153-0470
0-25	▲	.002	153-0061 *	153-0611	—	153-0471
0-30	▲	.001	153-0062	153-0612 *	—	153-0472
0-50	▲	.00035	153-0063 *	153-0613	—	153-0473
A basic 0-5 Ampere AC Instrument; dial reads "AC AMPERES"; transformer not included						
0-75	—	53-1248	53-1617	53-1904	53-1476	53-1312
0-100	—	53-1537	53-1753	53-1905	53-1494	53-1549
0-150	—	53-1538	53-1576	53-1906	53-1516	53-1260
0-200	—	53-1348	53-1891	53-1907	53-1544	53-1314
0-300	—	53-1315	53-1755	53-1909	53-1254	53-1458
0-500	—	53-1316	53-1579	53-1910	53-1525	53-1599

AC VOLTMETERS

Range	Ω/Volt	330-G	330-GL	330-GL/B	331-S	337-S
0-10	10	153-0051	153-0583	—	153-0477	153-0506
0-50	50	153-0056	153-0586	—	153-0480	153-0509
0-100	91	153-0027	153-0528	—	153-0481 *	153-0510
0-150	125	153-0028 *	153-0529	153-0534	153-0482	153-0511
0-250	144	153-0030	153-0531	153-0536	153-0483	153-0512
0-300	144	153-0031	153-0532	153-0537	153-0484 *	153-0513
0-500	■	125	153-0213	153-0680	153-0681	153-0485
90-130	45	153-0212	153-0627	53-1539	—	—

- Reads 0-1 Milliampere
- ▲ Units are self-contained
- External multiplier box is included with unit
- * Models which are normally stocked by Distribution

For additional ranges, please contact factory.

C

DC RANGES

4 1/2"

AC RANGES

DC MICROAMMETERS (Pivot & Jewel)

Range	Ω Res.	420	420-G	420-GL	420-GL/B	420-R
0-50	2300	152-1822	152-0001	152-2084	152-2315	152-0462
0-100	825	152-1823	152-0003	152-2085	152-2316	152-0464
0-200	360	152-1824	152-0005	152-2086	152-2317	152-0466
0-500	156	152-1825	152-0008	152-2087	152-2318	152-0469

DC MICROAMMETERS (Taut Band)

Range	Ω Res.	420	420-G	420-GL	420-GL/B	420-R
0-5	15,000	152-1826	52-3072	152-2039	152-2214	152-0475
0-10	7,500	152-1827	152-0240	152-2040	152-2215	152-0476
0-20	2,500	152-1828	152-0242	152-2041	152-2216	152-0478
0-50	825	152-1829	152-0245	152-2042	152-2217	152-0481
0-100	360	152-1830	152-0261	152-2043	152-2218	152-0483
0-200	156	152-1831	152-0263	152-2044	152-2219	152-0485
0-500	40	152-1832	152-0266	152-2045	152-2220	152-0488
0-1000	12.5	152-1833	152-1344	152-2046	152-2383	—
50-0-50	360	152-1834	152-1239	152-2250	152-2280	—
100-0-100	156	152-1835	152-1240	152-2251	152-2281	—
500-0-500	12.5	152-1836	152-1241	152-2252	152-2282	—
40-0-40 NULL	1,700	—	52-3748	52-6111	52-6643	—

DC MILLIAMMETERS

Range	Ω Res.	420	420-G	420-GL	420-GL/B	420-R
0-1	55	152-1770	152-0010	152-2032	152-2152	152-0441
0-5	8.5	152-1773	152-0015	152-2035	152-2155	152-0446
0-10	3.1	152-1774	152-0017	152-2036	152-2156	152-0447
0-25	2.0	152-1776	152-0020	152-2038	152-2158	—
0-50	1.0	152-1777	152-0022	152-2110	152-2159	152-0452
0-100	.50	152-1779	152-0024	152-2112	152-2161	152-0454
0-200	.25	152-1781	152-0026	152-2114	152-2163	152-0456
0-500*	.10	152-1785	152-0029	152-2118	152-2167	152-0459

DC AMMETERS

Range	Ω Res.	420	420-G	420-GL	420-GL/B	420-R
0-1	▲	152-1788	152-0031	152-2242	152-2170	152-0417
0-5	▲	152-1790	152-0034	152-2244	152-2172	152-0422
0-10	▲	152-1791	152-0035	152-2245	152-2173	152-0423
0-30	▲	152-1794	152-0039	152-2248	152-2176	—
0-50	▲	152-1795	—	152-2249	152-2177	152-0428

A basic 0-50 Millivolt DC instrument; dial reads "DC AMPERES", shunt not included

0-50	—	52-6267	52-4994	52-6259	52-7461	52-7468
0-100	—	52-6021	152-1198	52-6260	52-5943	52-5733
0-150	—	52-5160	152-1199	52-6261	52-7462	152-0430
0-200	—	52-4971	152-1200	52-5254	52-7463	152-0431
0-250	—	52-4937	152-1201	52-6262	52-7464	152-0432
0-300	—	52-5478	152-1202	52-6263	52-7185	152-0433
0-500	—	52-4938	152-1203	52-6264	52-7465	152-0434
0-750	—	52-5313	152-1204	52-7460	52-7466	152-0435
0-1000	—	52-5385	52-3845	52-6266	52-7467	52-5881

DC MILLIVOLTMETERS

Range	Ω Res.	420	420-G	420-GL	420-GL/B	420-R
0-50	6.7	152-1800	152-0041	152-2076	152-2354	152-0406
0-100	13.5	152-1801	152-0042	152-2240	152-2355	—
0-150	20.2	152-1802	152-0043	152-2241	152-2356	—

DC VOLTMETERS (1000 Ohms/Volt)

Range	Ω /Volt	420	420-G	420-GL	420-GL/B	420-R
0-5	1000	152-1805	152-0051	152-2097	152-2370	152-0384
0-10	1000	152-1806	152-0053	152-2098	152-2371	152-0385
0-25	1000	152-1808	152-0056	152-2100	152-2372	152-0388
0-30	1000	152-1809	152-0057	152-2101	152-2373	—
0-50	1000	152-1810	152-0058	152-2102	152-2374	152-0390
0-100	1000	152-1811	152-0060	152-2103	152-2375	—
0-150	1000	152-1812	152-0061	152-2104	152-2376	152-0393
0-200	1000	152-1813	152-0062	152-2105	152-2377	—
0-250	1000	152-1814	152-0063	152-2106	152-2378	—
0-300	1000	152-1815	152-0064	152-2107	52-6616	152-0396
0-500	1000	152-1816	152-0065	152-2108	152-2379	152-0397
0-1000	2000	152-1818	152-0067	152-2434	152-2380	—
0-5000	2000	152-1821	152-0071	152-2437	152-2381	—

AC MILLIAMMETERS

Range	Ω Res.	430	430-G	430-GL	430-GL/B	430-R
0-10	4000	153-0419	153-0114	153-0550	153-0674	153-0296
0-50	120	153-0422	153-0119	153-0553	—	—
0-100	40	153-0423	153-0135	153-0554	153-0676	153-0205
0-250	5.9	153-0425	153-0138	153-0556	—	—
0-500	1.55	153-0426	153-0140	153-0557	153-0678	153-0210

AC AMMETERS

Range	Ω Res.	430	430-G	430-GL	430-GL/B	430-R
0-1	▲	153-0427	153-0015	153-0587	153-0623	153-0215
0-2	▲	153-0428	153-0017	153-0588	153-0624	153-0217
0-3	▲	153-0429	153-0019	153-0589	153-0625	153-0219
0-5	▲	153-0430	153-0020	153-0590	153-0626	153-0220
0-10	▲	153-0523	153-0044	153-0591	—	153-0199
0-15	▲	153-0524	153-0045	153-0592	—	153-0200
0-25	▲	153-0525	153-0047	153-0593	—	153-0202
0-30	▲	153-0526	153-0048	153-0594	—	153-0203
0-50	▲	153-0527	153-0049	153-0595	—	153-0204

A basic 0-50 Millivolt DC instrument; dial reads "DC AMPERES", shunt not included

0-75	—	53-1297	53-1177	53-1837	53-1916	53-1922
0-100	—	53-1258	53-1464	53-1610	53-1917	53-1524
0-150	—	53-1367	53-1249	53-1759	53-1388	53-1543
0-200	—	53-1251	53-1534	53-1915	53-1918	53-1570
0-300	—	53-1360	53-1389	53-1561	53-1920	53-1879
0-500	—	53-1310	53-1371	53-1603	53-1921	53-1924

AC VOLTMETERS

Range	Ω /Volt	430	430-G	430-GL	430-GL/B	430-R
0-10	10	153-0409	153-0037	153-0541	—	—
0-50	50	153-0412	153-0042	153-0544	—	—
0-100	91	153-0413	153-0032	153-0545	—	—
0-150	125	153-0414	153-0033	153-0546	153-0576	153-0195
0-250	144	153-0415	153-0035	153-0547	153-0577	—
0-300	144	153-0416	153-0036	153-0548	153-0578	153-0198
0-500	125	153-0417	153-0166	153-0549	153-0579	153-0347
90-130	45	153-0418	153-0165	53-1756	153-0622	—

● Reads 0-1 Milliampere

▲ Units are self-contained

■ External multiplier box is included with unit



* Models which are normally stocked by Distribution

For additional ranges, please contact factory.

4½" METER DIMENSIONS

Model 420
Model 430 AC Under 10 Amp & AC Voltmeters

Model 430 AC 10 Amp & Above

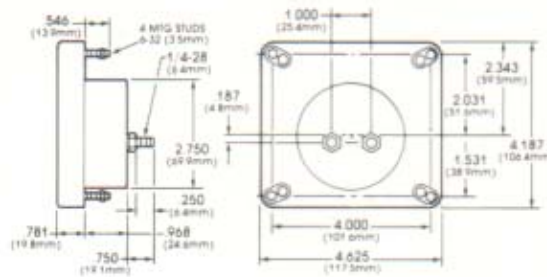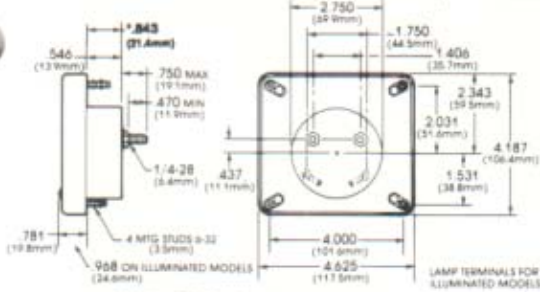

* .858 for AC & Taut Band

Model 420 Scale Length: 4.04"


Model 430 Scale Length: 3.60"



420 / 430

Model 420-G
Model 430-G AC Under 10 Amp & AC Voltmeters

Model 430-G AC 10 Amp & Above

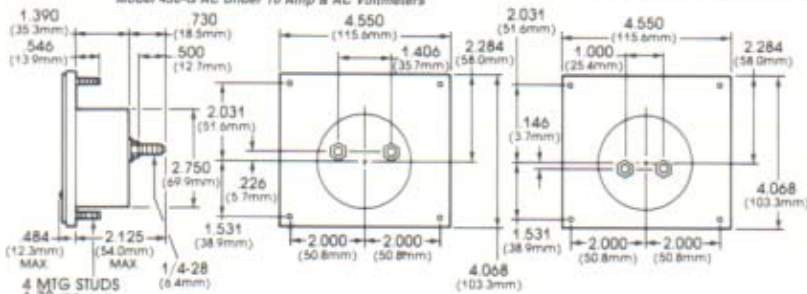

Model 420-G Scale Length: 4.03"


Model 430-G Scale Length: 3.42"



420-G / 430-G

Model 420-GL
Model 430-GL AC Under 10 Amp & AC Voltmeters

Model 430-GL AC 10 Amp & Above

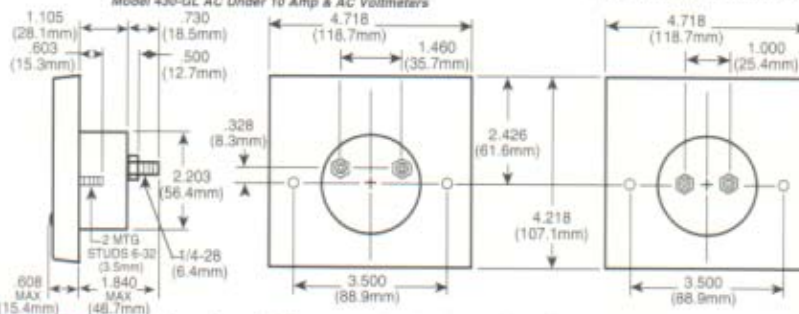


Model 420-GL Scale Length: 4.03"

Model 430-GL Scale Length: 3.36"




420-GL / 430-GL



Model 420-GL/B
Model 430-GL/B AC Under 10 Amp & AC Voltmeters

Model 430-GL/B AC 10 Amp & Above

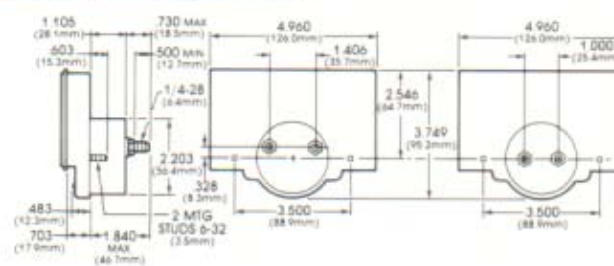

Model 420-GL/B Scale Length: 4.03"

Model 430-GL/B Scale Length: 3.36"


Allow 1.0" additional width for mounting hardware.



420-GL/B / 430-GL/B

Model 420-R
Model 430-R AC Under 10 Amp & AC Voltmeters

Model 430-R AC 10 Amp & Above

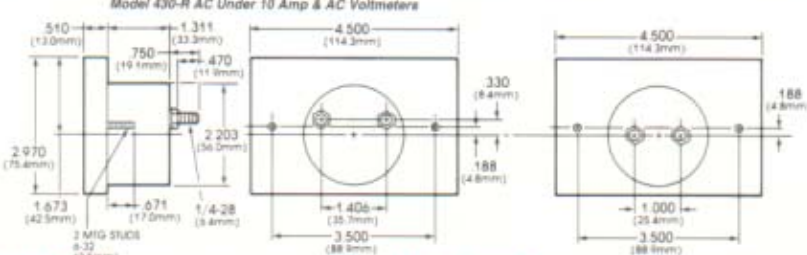

Model 420-R Scale Length: 3.45"

Model 430-R Scale Length: 2.87"



420-R / 430-R

DC RANGES

5 1/2"

AC RANGES

DC MICROAMMETERS (Pivot & Jewel)

Range	Ω Res.	520-G	520-GL	520-GL/B
0-50	2300	152-1085	152-2178	152-2366
0-100	825	152-1087	152-2179	152-2367
0-200	360	152-1089	152-2180	152-2368
0-500	156	152-1092	152-2181	152-2369

DC MICROAMMETERS (Taut Band)

Range	Ω Res.	520-G	520-GL	520-GL/B
0-10	7,500	152-1096	152-2070	—
0-20	2,500	152-1098	152-2071	52-6644
0-50	825	152-1101	152-2072	52-6254
0-100	360	152-1103	152-2073	52-6645
0-200	156	152-1104	152-2074	—
0-500	40	152-1105	152-2075	52-6646

DC MILLIAMMETERS

Range	Ω Res.	520-G	520-GL	520-GL/B
0-1	55	152-1064	152-2062	152-2203
0-5	8.5	152-1069	152-2063	152-2204
0-10	3.1	152-1070	152-2064	152-2205
0-50	1.0	152-1075	152-2065	152-2206
0-100	.50	152-1077	152-2066	152-2207
0-200	.25	152-1079	152-2067	152-2208
0-500	.10	152-1082	152-2069	52-6587

DC AMMETERS

Range	Ω Res.	520-G	520-GL	520-GL/B
0-1 ▲	—	152-1040	152-2412	52-6595
0-5 ▲	—	152-1045	152-2413	52-6596
0-10 ▲	—	152-1046	152-2414	52-6597
0-30 ▲	—	152-1050	152-2415	52-6598
0-50 ▲	—	—	152-2416	52-6599

DC MILLIVOLTMETERS

Range	Ω Res.	520-G	520-GL	520-GL/B
0-50	6.7	152-1029	152-2221	52-6602

DC VOLTMETERS (1000 Ohms/Volt)

Range	Ω /Volt	520-G	520-GL	520-GL/B
0-5	1000	152-1007	152-2307	52-6617
0-10	1000	152-1008	152-2308	52-6618
0-25	1000	152-1011	152-2309	52-6619
0-30	1000	152-1012	152-2310	52-6620
0-50	1000	152-1013	152-2311	52-6621
0-150	1000	152-1016	152-2312	52-6622
0-500	1000	152-1020	152-2313	52-6623

AC MILLIAMMETERS

Range	Ω Res.	530-G	530-GL	530-GL/B
0-10	4000	153-0342	153-0656	153-0671
0-100	40	153-0258	153-0657	153-0672
0-500	1.55	153-0263	153-0658	153-0673

AC AMMETERS

Range	Ω Res.	530-G	530-GL	530-GL/B
0-1 ▲	.38	153-0246	153-0649	153-0664
0-5 ▲	.014	153-0251	153-0650	153-0665
0-10 ▲	.004	153-0229	—	—
0-15 ▲	.003	153-0230	—	—
0-25 ▲	.002	153-0231	—	—
0-30 ▲	.001	153-0232	—	—
0-50 ▲	.00035	153-0233	—	—

AC VOLTMETERS

Range	Ω /Volt	530-G	530-GL	530-GL/B
0-10	10	153-0343	153-0644	—
0-50	50	153-0344	153-0645	—
0-150	125	153-0254	153-0646	153-0661
0-300	144	153-0257	153-0647	153-0662
0-500 ■	125	153-0341	153-0648	153-0663

▲ Units are self-contained

■ External multiplier box is included with unit


For additional ranges, please contact factory.

5 1/2"

5¹/₂" METER DIMENSIONS

Model 520-G
Model 530-G AC Under 10 Amp & AC Voltmeters

Model 530-G AC 10 Amp & Above

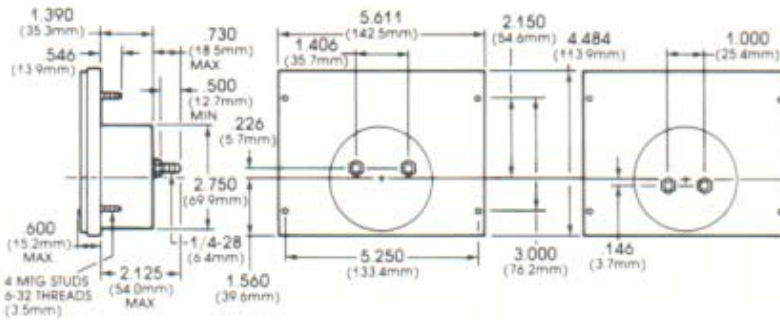


Model 520-G Scale Length: 5.00"

Model 530-G Scale Length: 4.25"

520-G / 530-G

Model 520-GL
Model 530-GL AC Under 10 Amp & AC Voltmeters

Model 530-GL AC 10 Amp & Above

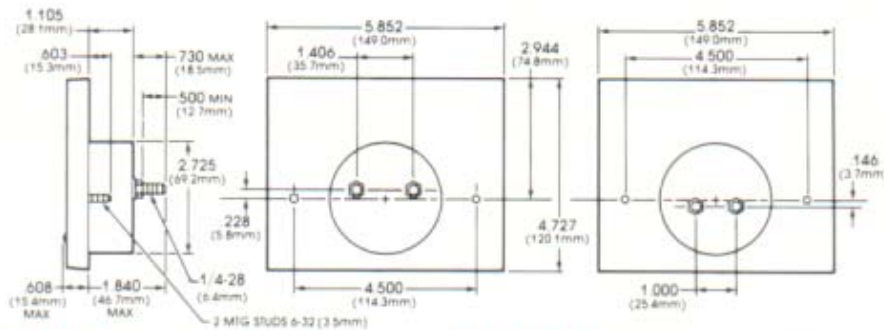


Model 520-GL Scale Length: 5.00"

Model 530-GL Scale Length: 4.25"

520-GL / 530-GL

Model 520-GL/B
Model 530-GL/B AC Under 10 Amp & AC Voltmeters

Model 530-GL/B AC 10 Amp & Above

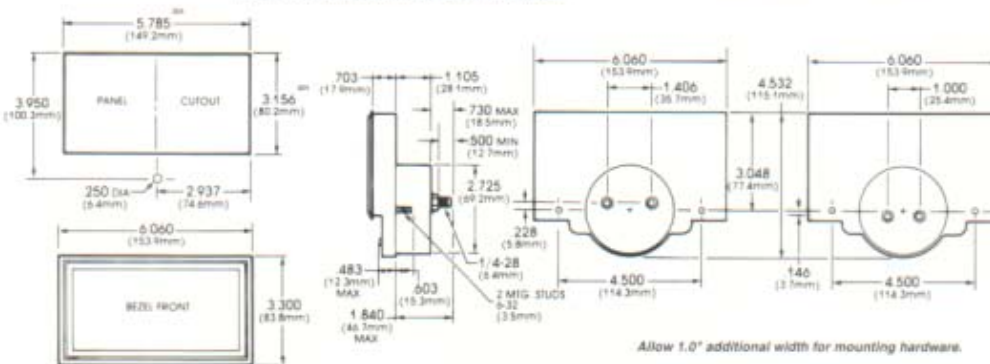

Allow 1.0" additional width for mounting hardware.

Model 520-GL/B Scale Length: 5.00"

Model 530-GL/B Scale Length: 4.25"



520-GL/B / 530-GL/B

DC RANGES $6\frac{1}{2}"$ $7\frac{1}{2}"$ $8\frac{1}{2}"$ AC RANGES

DC MICROAMMETERS (Pivot & Jewel)

Range	Ω Res.	626	726	820-GL
0-50	2300	152-1873	152-1904	152-1590
0-100	825	152-1874	152-1905	152-1591
0-200	360	152-1875	152-1906	152-1592
0-500	156	152-1876	152-1907	152-1593

DC MICROAMMETERS (Taut Band)

Range	Ω Res.	626	726	820-GL
0-10	15,000	152-1883	152-1909	152-2338
0-20	7,500	152-1884	152-1910	152-2339
0-50	2,500	152-1885	152-1911	152-2340
0-100	825	152-1886	152-1912	152-2341
0-200	360	152-1887	152-1913	152-2342
0-500	156	152-1888	152-1914	152-2343

DC MILLIAMMETERS

Range	Ω Res.	626	726	820-GL
0-1	55	152-1865	152-1896	152-2404
0-5	8.5	152-1866	152-1897	152-2405
0-10	3.1	152-1867	152-1898	152-2406
0-50	1.0	152-1868	152-1899	152-2407
0-100	.50	152-1869	152-1900	152-2408
0-200	.25	152-1870	152-1901	152-2409
0-500	.10	152-1872	152-1903	152-2410

DC AMMETERS

Range	Ω Res.	626	726	820-GL
0-1 ▲	—	152-1878	152-1915	152-2428
0-5 ▲	—	152-1879	152-1916	152-2429
0-10 ▲	—	152-1880	152-1917	152-2430
0-30 ▲	—	152-2314	152-1919	152-2432
0-50 ▲	—	152-1882	—	—

DC MILLIVOLTMETERS

Range	Ω Res.	626	726	820-GL
0-50	6.7	152-1877	152-1908	152-2351

DC VOLTMETERS (1000 Ohms/Volt)

Range	Ω /Volt	626	726	820-GL
0-5	1000	152-1858	152-1889	152-2344
0-10	1000	152-1859	152-1890	152-2345
0-25	1000	152-1860	152-1891	152-2346
0-30	1000	52-6624	52-6625	152-2347
0-50	1000	152-1861	152-1892	152-2348
0-150	1000	152-1862	152-1893	152-2349
0-500	1000	152-1864	152-1895	152-2350

AC MILLIAMMETERS

Range	Ω Res.	636	736	830-GL
0-10	4000	153-0438	153-0453	53-1757
0-100	40	153-0439	153-0454	—
0-500	1.55	153-0440	153-0455	—

AC AMMETERS

Range	Ω Res.	636	736	830-GL
0-1 ▲	.38	153-0431	153-0446	153-0640
0-5 ▲	.014	153-0432	153-0447	153-0641
0-10 ▲	.004	153-0433	—	—
0-15 ▲	.003	153-0434	—	—
0-25 ▲	.002	153-0435	—	—
0-30 ▲	.001	153-0436	—	—
0-50 ▲	.00035	153-0437	—	—

AC VOLTMETERS

Range	Ω /Volt	636	736	830-GL
0-10	10	153-0441	153-0456	—
0-50	50	153-0442	153-0457	—
0-150	125	152-0443	153-0458	153-0642
0-300	144	153-0444	153-0459	—
0-500 ■	125	153-0445	153-0460	—


▲ Units are self-contained

■ External multiplier box is included with unit

For additional ranges, please contact factory.


6½" 7½" 8½" METER DIMENSIONS

Model 626
Model 636 AC Under 10 Amp & AC Voltmeters

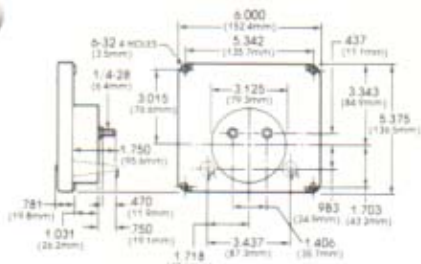

Model 626 Scale Length: 5.60"

Model 636 AC 10 Amp & Above

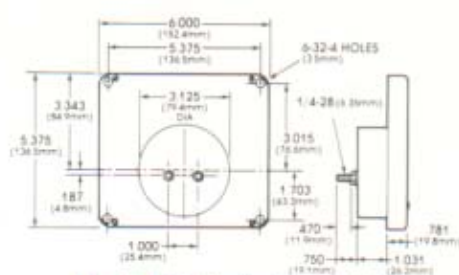


Model 636 Scale Length: 5.10"



6½"


626 / 636

Model 726
Model 736 AC Under 10 Amp

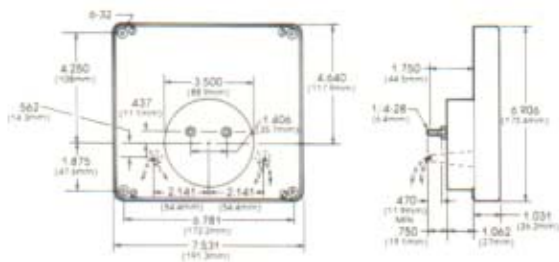

Model 726 Scale Length: 6.11"

Model 736 AC 10 Amp & Above

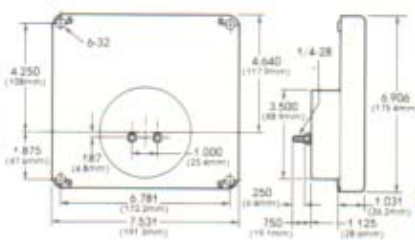


Model 736 Scale Length: 5.47"



7¹/₂"

726 / 736

Model 820-GL
Model 830-GL AC Under
10 Amp & AC Voltmeters

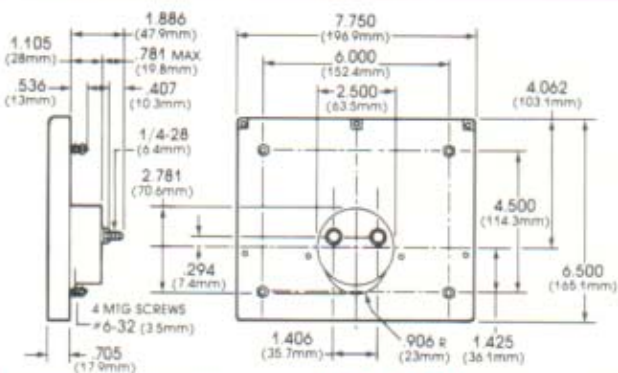

Model 820-GL Scale Length: 6.65"

Model 830-GL Scale Length: 5.65"



8½"

820-GL / 830-GL

EDGEWISE SERIES

DC MICROAMMETERS (Pivot & Jewel)

Range	Ω Res.	.5-E	120	220-E	320-E	320-ED	320-EG	420-E
0-50	2300	52-3188	152-0296	52-6253	152-1313	52-8205	52-6630	152-1971
0-100	825	152-1164 *	152-0298	52-6316	152-1314	—	52-6631	152-1972
0-200	360	152-1166	152-0300	52-6628	152-1315	—	52-6632 *	152-1973
0-500	156	152-1189	152-0303	52-6629	152-1316	—	52-6633	152-1974
50-0-50	825	—	152-1194	—	—	—	—	—
100-0-100	360	—	152-1195	—	—	—	—	—
500-0-500	55	—	152-1196	—	—	—	—	—

DC MICROAMMETERS (Taut Band)

Range	Ω Res.	.5-E	120	220-E	320-E	320-ED	320-EG	420-E
0-10	15,000	—	—	—	152-1361	—	—	152-1975
0-20	7,500	—	—	—	152-1983	—	—	152-1976
0-50	2,300	—	—	—	152-1981	—	—	152-1977
0-100	825	—	—	—	152-1982	—	—	152-1978
0-200	360	—	—	—	152-1984	—	—	152-1979
0-500	156	—	—	—	152-1346	—	—	152-1980

DC MILLIAMMETERS

Range	Ω Res.	.5-E	120	220-E	320-E	320-ED	320-EG	420-E
0-1	55	152-1176	152-0305	152-2238	152-1300	52-8206	152-2433	152-1950
0-5	8.5	152-1181	152-0310	52-6576	152-1301	—	52-6581	152-1951
0-10	3.1	152-2399	152-0312	52-6577	152-1302	—	52-6582	152-1952
0-50	1.0	152-2400	152-0317	52-6578	152-1303	—	52-6583	152-1953
0-100	.50	152-2401	152-0319	52-6579	152-1304	—	52-6584	152-1954
0-200	.25	152-2402	152-0321	52-6279	152-1305	—	52-6585	152-1955
0-500	.10	152-2403	152-0324	52-6580	152-1307	—	52-6586	152-1957

DC AMMETERS

Range	Ω Res.	.5-E	120	220-E	320-E	320-ED	320-EG	420-E	
0-1	▲	—	52-6588	152-1343	52-6589	152-1350	—	52-6590	152-1959
0-5	▲	—	—	—	—	152-1353	—	52-6591	152-1960
0-10	▲	—	—	—	—	152-1400	—	52-6592	152-1961
0-30	▲	—	—	—	—	152-1404	—	52-6593	52-6657
0-50	▲	—	—	—	—	152-1405	—	52-6594	152-1963

DC MILLIVOLTMETERS

Range	Ω Res.	.5-E	120	220-E	320-E	320-ED	320-EG	420-E
0-50	6.7	52-3720	152-0326	52-6600	152-1333	52-8207	52-6601	152-1958

DC VOLTMETERS (1000 Ohms/Volt)

Range	Ω /Volt	.5-E	120	220-E	320-E	320-ED	320-EG	420-E
0-5	1000	152-1221 *	152-0336	52-6604	152-1410	—	52-6609	152-1964
0-10	1000	152-1254	152-0338	52-6605	152-1317	—	52-6610	152-1965
0-25	1000	152-1257	152-0341	52-6280	152-1320	—	52-6611	152-1966
0-30	1000	152-1258	152-0342	52-6606	152-1321	—	52-6612	152-2364
0-50	1000	152-1259	152-0343	52-6607	152-1322	—	52-6613	152-1967
0-150	1000	152-1286	152-0346	52-6608	152-1337	—	52-6614	152-1968
0-500	1000	—	—	—	152-1341	—	52-6615	152-1970






▲ Units are self-contained

* Models which are normally stocked by Distribution

For additional ranges, please contact factory.

All Edgewise Instruments are standard Horizontal Mounting, Barrel Down, Zero Left (except zero center models). Other configurations must be special ordered.

BEZEL SIZES & PANEL CUTOUTS

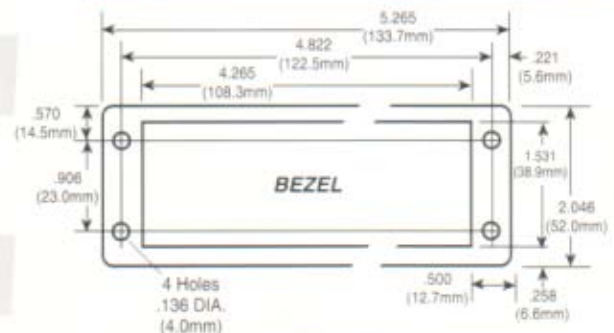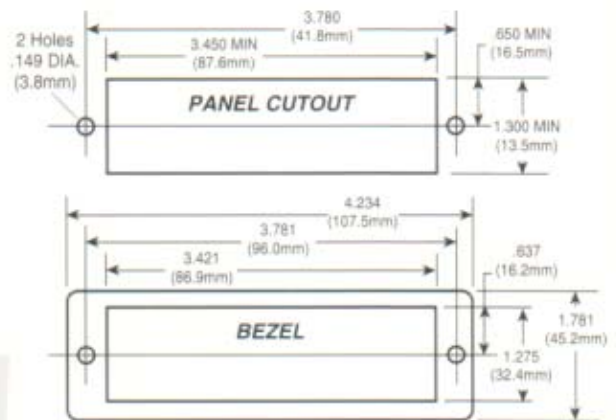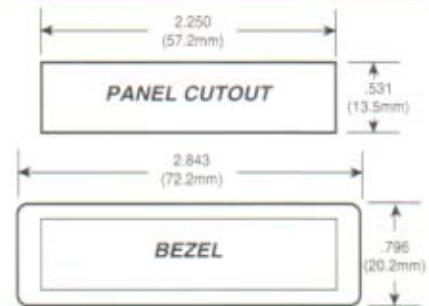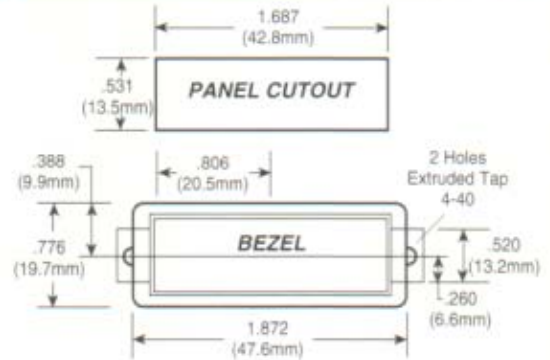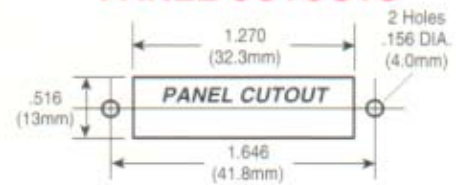


Cutouts & Bezels are not shown in proportion to each other.

EDGEWISE SERIES METER DIMENSIONS

1 1/2"

Model .5-E Scale Length: .84"

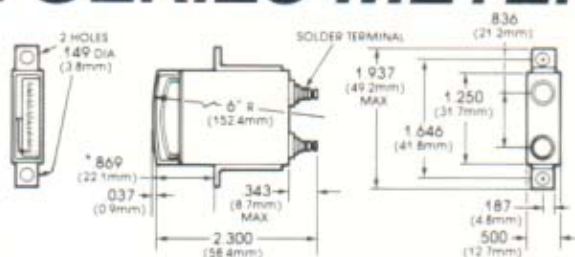

*Standard Dimension, other configurations may be special ordered.




Actual Size

Model .5-E

1 1/2"


Model 120 Scale Length: 1.15"

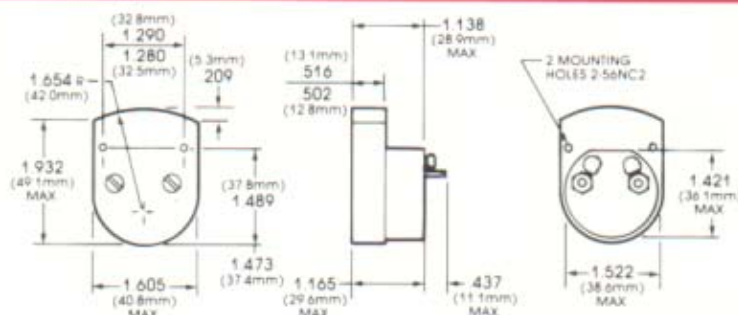

Model 120

2 1/2"

Model 220-E Scale Length: 1.75"

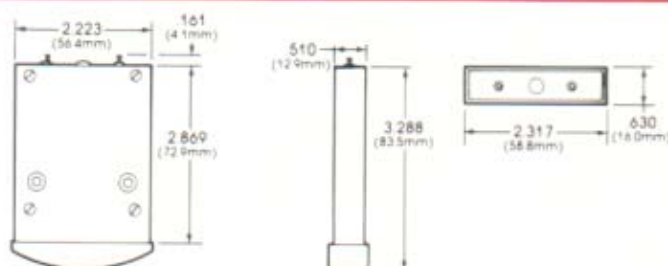


Model 220-E

3 1/2"

Model 320-EG Scale Length: 2.58"

Model 320-E Scale Length: 2.75"

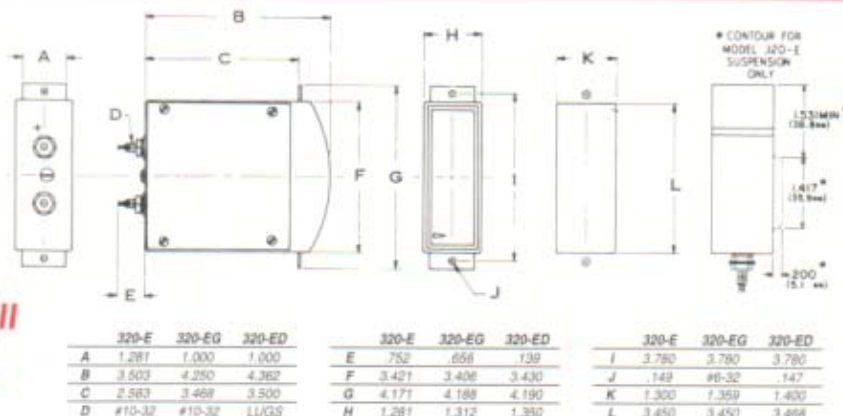

Model 320-ED Scale Length: 2.55"



Model 320-E & 320-EG




Dual Movement Meter

Model 320-ED

4 1/2"

Model 420-E Scale Length: 3.87"

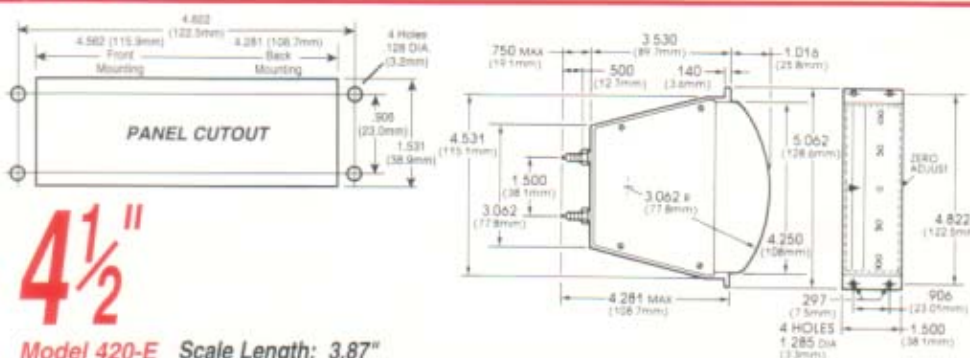

Model 420-E

G SERIES OPTIONS


G SERIES Bezel & Illumination Kit



Illumination Kit Requires Bezel Mounting


Allow .50" additional width for Bezel Mounting Hardware.

2 1/2" Models 220-G Series

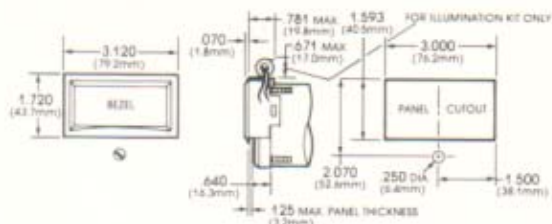


Metal Bezel - Cat # 13-238 Illumination Kit - Cat. # 66-80

3 1/2" Models 320-G Series

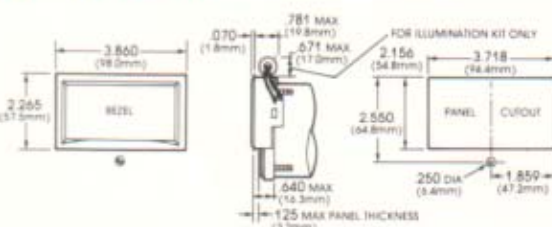


Metal Bezel - Cat # 13-239 Illumination Kit - Cat. # 66-80

4 1/2" Models 420-G Series

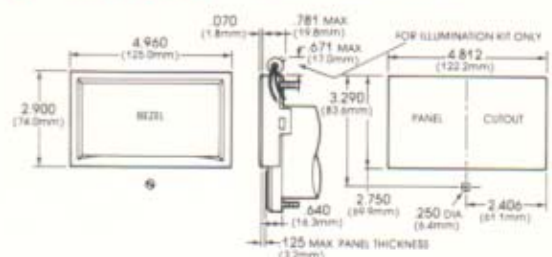

Metal Bezel - Cat # 13-236 Illumination Kit - Cat. # 66-80


5 1/2" Models 520-G Series

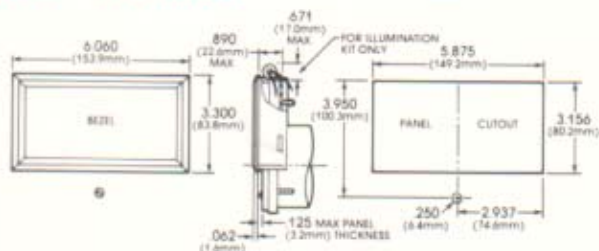


Metal Bezel - Cat # 13-240 Illumination Kit - Cat. # 66-83

GS - SHALLOW BARREL SERIES


A Special Shallow Barrel Thermoplastic back is available for 1 1/2", 2 1/2", 3 1/2" and 4 1/2" G-Series Panel Meters.

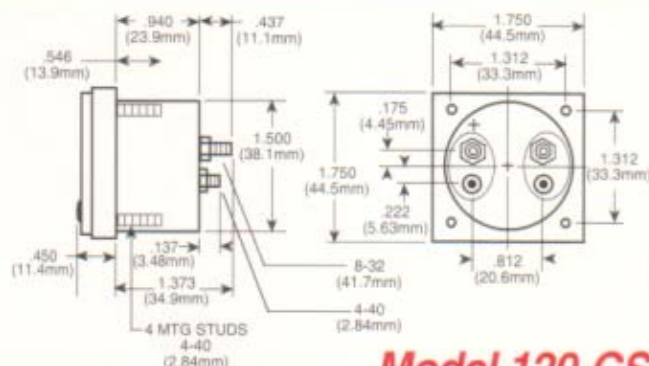


Model 120-GS

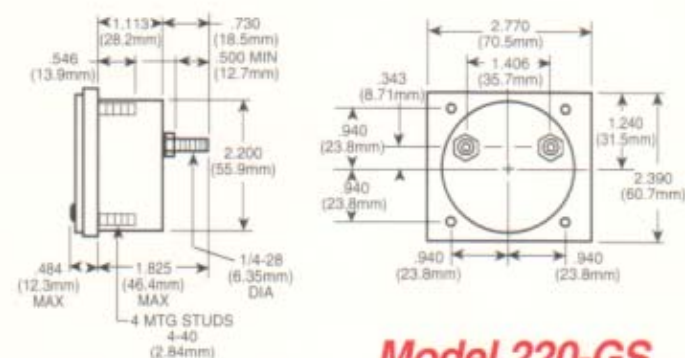

Model 220-GS

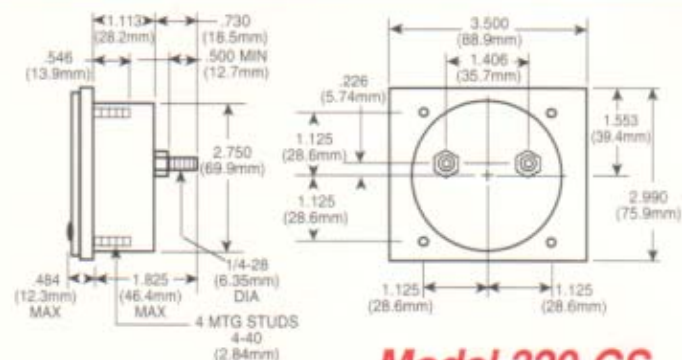

Model 320-GS

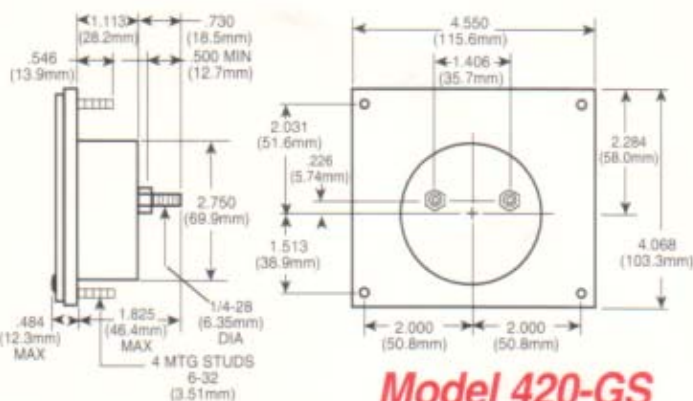

Model 420-GS

QUALITY PRODUCTS FROM TRIPLETT CORPORATION.



Test Equipment ▲ Analog & Digital Panel Meters ▲ Bargraphs

Since its founding in 1904, Triplet Corporation has been producing quality Test and Measurement equipment for use in the electrical industry. From the very beginning, Triplet has set the industry standards with its revolutionary product development. A perfect example of this is the hand-held Model 310 multimeter developed in 1955 which continues to be one of Triplet's best sellers. Since then, Triplet Corporation has entered the digital display era in both test equipment and panel meters without forgetting the importance of its analog models. With the introduction of the Universal Bargraph Series in 1991, Triplet has, once again, proven its commitment to lead the way with Product, Quality and Technology for Tomorrow.



TRIPLETT CORPORATION

Quality and Technology for Tomorrow

ONE TRIPLETT DRIVE, BLUFFTON, OH 45817

(419) 358-5015 1-800-874-7538

FAX (419) 358-7956

Your Authorized Triplet Dealer is: