

THIS IS CAD DRAWING. DO NOT REVISE MANUALLY!!!!


- Item **(a)** Clamp: Brass(CuZn) Ni plated
- Item **(b)** Terminal screw: Steel Zinc plating “-” slot type
- Item **(c)** Female contact: PhBz ,Tin plated
- Item **(d)** Terminal Cover: Thermoplastic (UL94V-0)
- Item **(e)** Terminal housing: Thermoplastic (UL94V-0)

- Voltage rating: 300VAC/300VAC/300VAC

- ⚠ ● Current rating: 20A/20A/20A
 - Wire range: 2.5mm²/0.34-2.5mm²
- ⚠ ● Solid wire(AWG): 12-24/14-22
- ⚠ ● Stranded wire(AWG): 12-24/14-22
 - Torque: 5Lb-In/0.5Nm/0.56Nm
 - Screw: M3
 - Wire strip length: 7-8mm
 - Withstanding Voltage: 1.6KV/2.5KV/2.5KV
 - Operating temperature: -40°C to +115°C
 - Safety Approval:   
 - Use with 0Q1.0×1.0mm square pin, Withdrawal force:200 - 500gf /pole

TJ xx 51 x 3 xxxx G

02	2 CONTACTS	0	Black (RAL9005)	000 0	Standard @ Logo	Pb < 4,0,000ppm
03	3 CONTACTS	2	Red (RAL3001/D)	000 A	Standard ANY Logo (RoHS)	
...	...	3	Orange (RAL2011/P)		Any special item by	
24	24 CONTACTS	4	Yellow (RAL1018/A)		customer request,	
		5	Green (RAL6018/T)		please contact sales	
		6	Blue (RAL5015/A)		department.	
		8	Grey (RAL7035/D)			

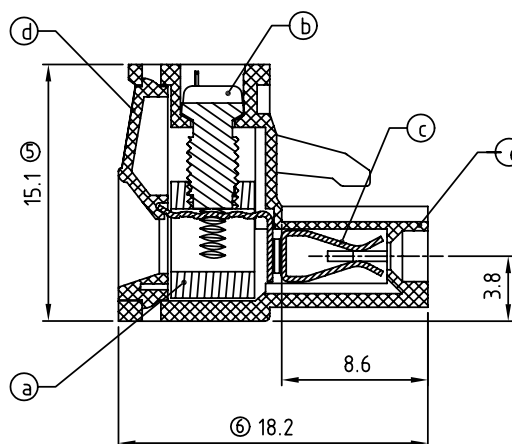

DIMENSION	
L	$N \times 5.08$
A	$(N-1) \times 5.08$
B	$N \times 5.08 + 0.1$

N=Number of poles

Poles	Tolerance	
	DIM A	DIM L&DIM B
2p-6p	±0.15	±0.20
7p-12p	±0.20	±0.25
13p-18p	±0.25	±0.30
19p-24p	±0.30	±0.40

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TJ-5.08mm Series						
PART NO.		TJxx51x3xxxxG			DWG NO.	8TJ0007		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
		Jacke 2010.03.09	Jacke 2010.03.09		UNIT: mm		X.	±0.50
					SCALE: NONE		X.X	±0.30
					REV: G		X.XX	±0.10
				SHEET: 01/01			X°	±1°