

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
B	PRODUCT DRAWING (EAR 14331)	JAN21/15	K.L.







USB 3.0 STANDARD-A CONNECTOR PIN ASSIGNMENTS		
PIN NUMBER	SIGNAL NAME	DESCRIPTION
1	VBUS	POWER
2	D-	USB 2.0 DIFFERENTIAL PAIR
3	D+	
4	GND	GROUND FOR POWER RETURN
5	StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR
6	StdA_SSRX+	
7	GND_DRAIN	GROUND FOR SIGNAL RETURN
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR
9	StdA_SSTX+	
SHELL	Shield	CONNECTOR METAL SHELL


- NOTES:**
- MATERIAL**
 - ALL MATERIALS ARE RoHS COMPLIANT PER EU DIRECTIVE 2011/65/EU AND AMENDMENTS
 - SHELL: NICKEL PLATED COPPER ALLOY
 - HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94V-0, COLOUR - BLUE
 - CONTACTS: PHOSPHOR BRONZE WITH 0.76 µm [30 µ"] GOLD, OVER NICKEL ON MATING AREA, TIN PLATING ON SOLDER TAILS
 - LOCKING TAB: STAINLESS STEEL
 - LATCH FEATURE PROVIDES A POSITIVE LOCK TO ANY STANDARD USB 2.0 OR 3.0 TYPE 'A' PLUG.
 - LOCKING FORCE: MIN. 50 N.
 - OPERATING TEMPERATURE: -40C TO +105C.
 - CURRENT RATING: 1.8A FOR POSITIONS 1 AND 4, 0.25A FOR REMAINING POSITIONS.

AMPHENOL CANADA P/N: LUSB-3193-00


UNLESS SPECIFIED OTHERWISE		DRAWN	B.COPPING	MAY4/12	Amphenol Canada Corp. www.amphenolcanada.com LUSB SERIES USB 3.0 TYPE A RECEPTACLE WITH POSITIVE LOCKING LATCH, RIGHT ANGLE PCB TAIL, RoHS COMPLIANT	REV B
PRIMARY UNITS MILLIMETERS		CHECKED				
SECONDARY INCHES		M.E. APP'D				
REFERENCE IN PARENTHESES		Q.A. APP'D				
GENERAL TOLERANCES		DWG APPR.	K.LAMBIE	MAY4/12	P-LUSB-3193-00	
1 DECIMAL PLACE	±0.40	ENG. REL. NO.	EAR 14026			
2 DECIMAL PLACES	±0.25	REF.				
3 DECIMAL PLACES		THIRD ANGLE PROJECTION				
ANGULAR DEGREES	±0.1°				CODE ID NO. 03554	
					DWG. NO.	
					SCALE: 5:1	
					SHEET 1 OF 2	

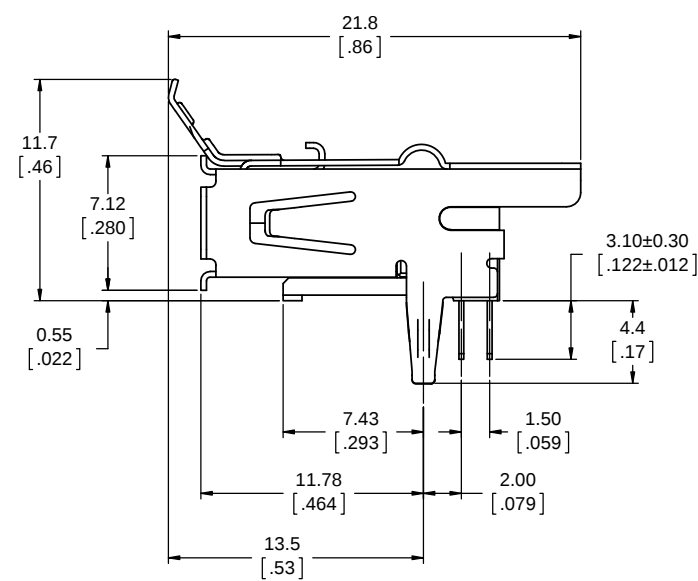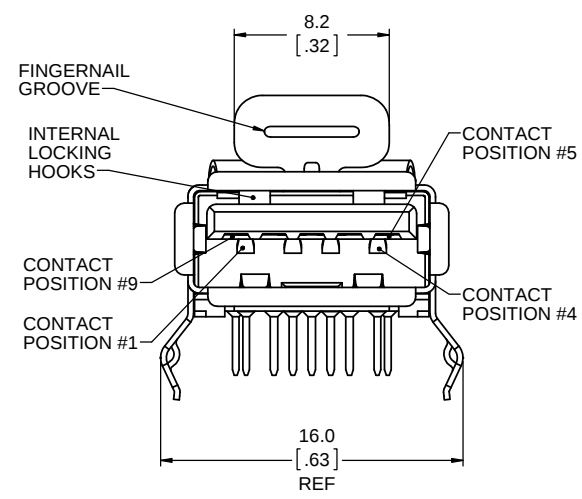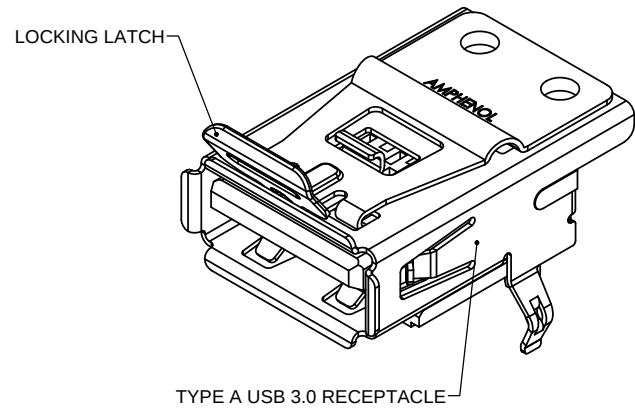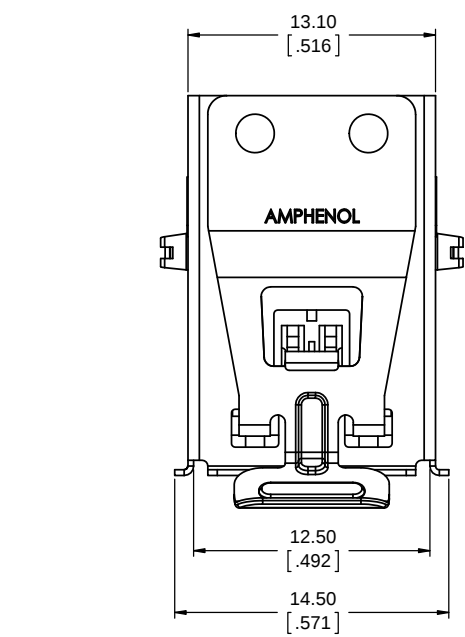


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
B	PRODUCT DRAWING (EAR 14331)	JAN21/15	K.L

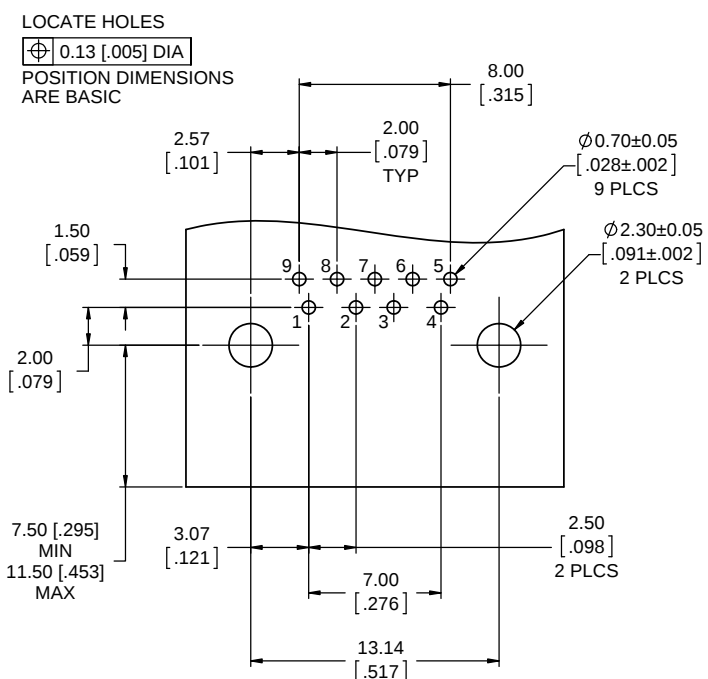

RECOMMENDED PCB LAYOUT
 COMPONENT SIDE OF BOARD

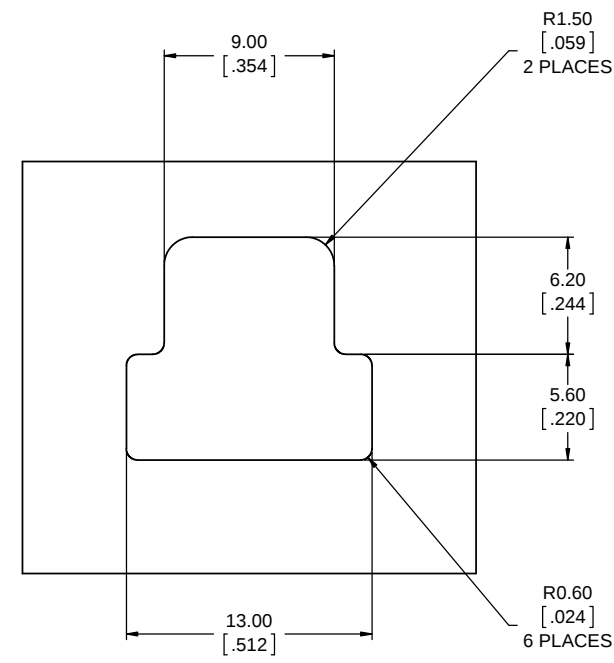

RECOMMENDED PANEL CUT-OUT

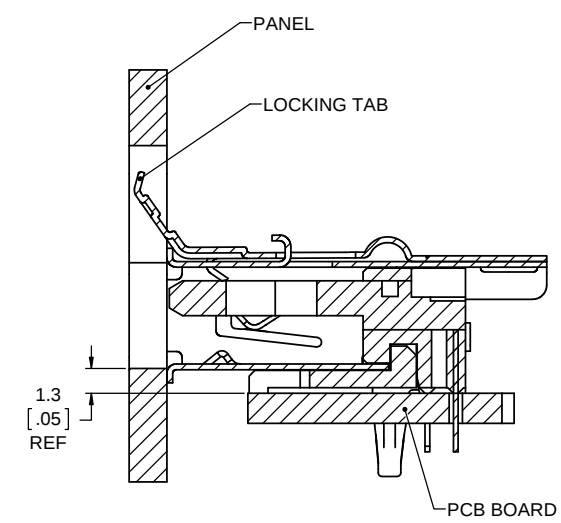

SECTION THROUGH PANEL CUT-OUT



UNLESS SPECIFIED OTHERWISE		DRAWN	B.COPPING	MAY4/12
PRIMARY	UNITS MILLIMETERS	CHECKED		
SECONDARY	INCHES	M.E. APP'D		
REFERENCE	IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES		DWG APPR.	K.LAMBIE	MAY4/12
1 DECIMAL PLACE	± 0.40	ENG. REL. NO.	EAR 14026	
2 DECIMAL PLACES	± 0.25	REF.		
3 DECIMAL PLACES		THIRD ANGLE PROJECTION		
ANGULAR DEGREES	$\pm 0.1^\circ$	DO NOT SCALE DRAWING		

Amphenol Canada Corp.
www.amphenolcanada.com
 LUSB SERIES USB 3.0 TYPE A
 RECEPTACLE WITH POSITIVE
 LOCKING LATCH, RIGHT ANGLE
 PCB TAIL, RoHS COMPLIANT

DWG. NO. **P-LUSB-3193-00**
 CODE ID NO. **03554** | DWG SIZE: X | SCALE: 5:1 | SHEET 2 OF 2

REV **B**