
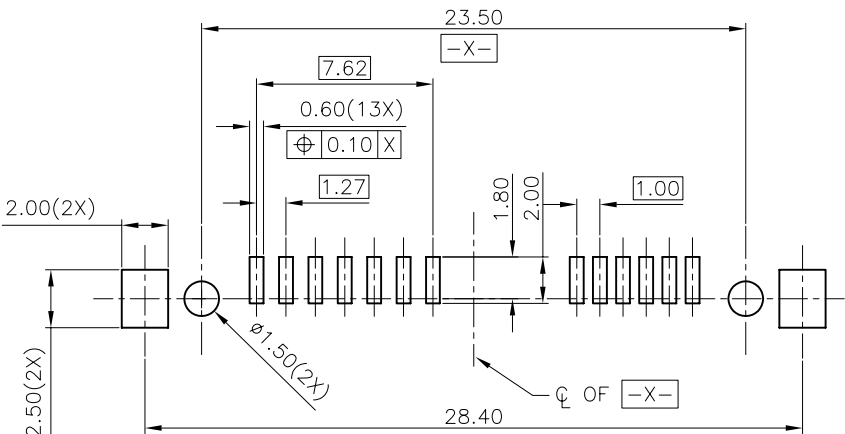
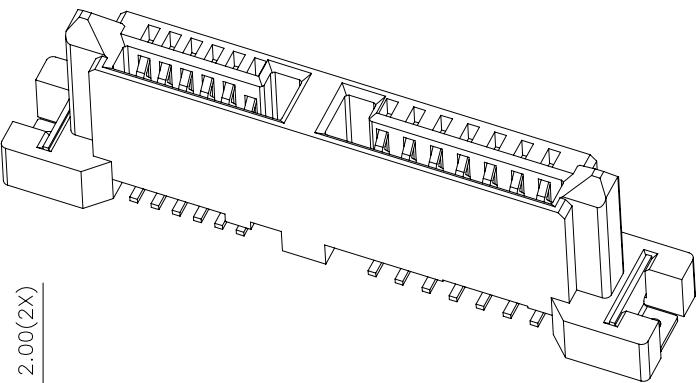




CUSTOMER DRAWING

REVISIONS


SYM	ECN	DESCRIPTION	DATE	APPROVED
A		RELEASED TO CUSTOMER	4/15/06	IP

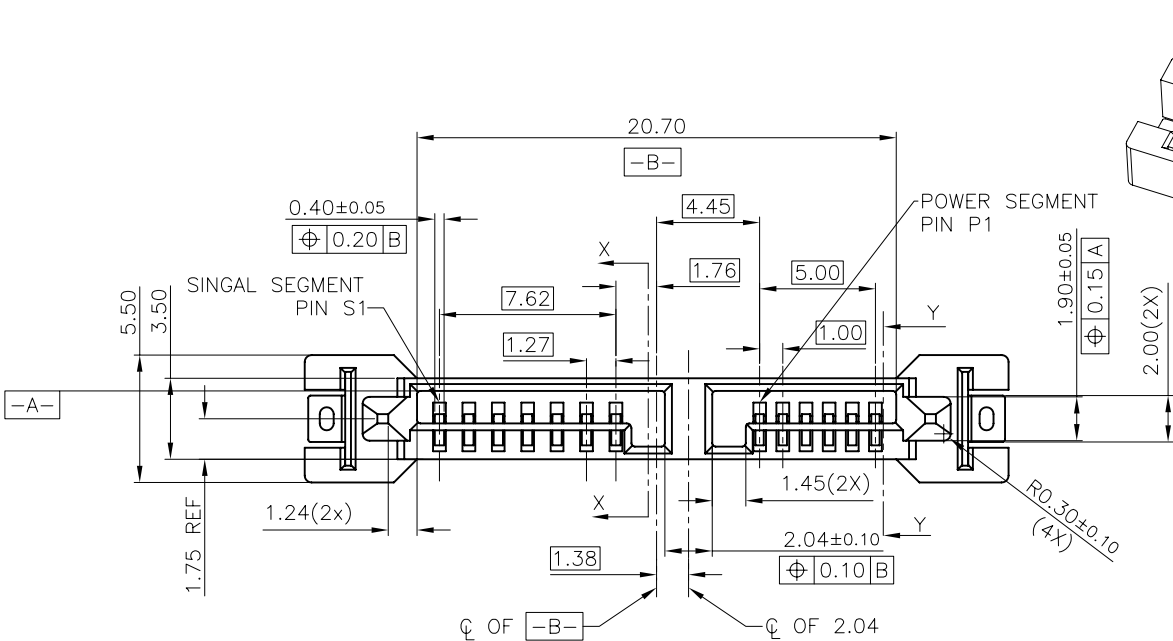

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

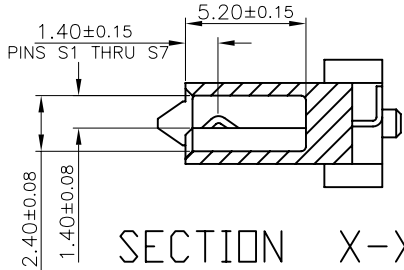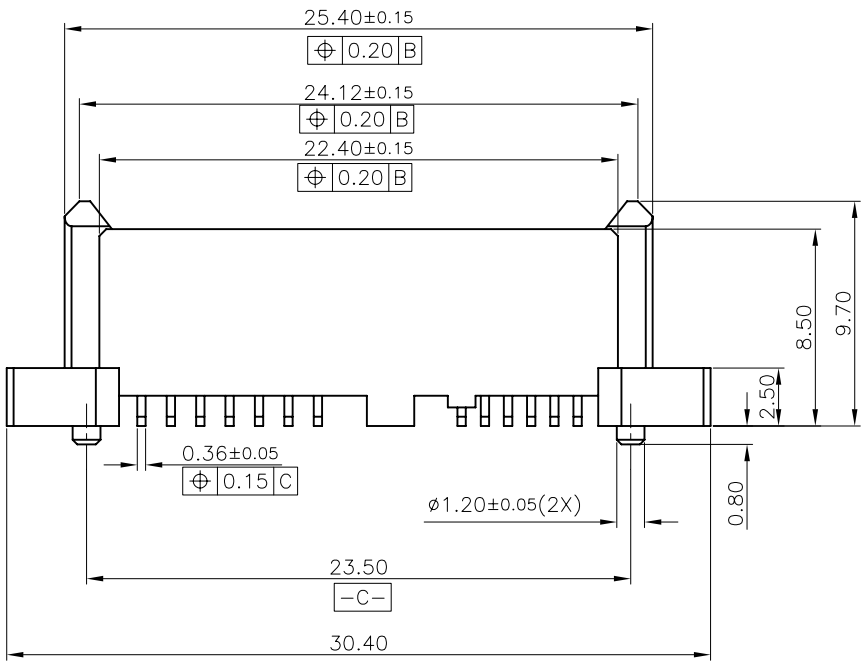

SECTION X-X



SECTION Y-Y


NOTE:

- MATERIAL: HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, UL94V-0 BLACK
TERMINAL: COPPER ALLOY,THICKNESS=0.25MM
SCREW NAL: STAINLESS,THICKNESS=0.35MM
- PLATING: CONTACT AREA: SEE P/N SYSTEM
SOLDERTAIL: TIN PLATING
UNDERPLATE: NICKEL PLATING
- PACKING: TRAY
- MATERIAL SHOULD BE FULFILLED AMPHENOL SPEC,SSN2002
- P/N SYSTEM:

SSATA-101-0102-1-X

1:0.76um Au PLATING ON CONTACT AREA;
2:0.38um Au PLATING ON CONTACT AREA;
3:GOLD FLASH ON CONTACT AREA.



UNLESS OTHERWISE SPECIFIED TOLERANCES			APPROVAL		DATE	Amphenol					
U.S.	METRIC		DRAWN	Maya.Lu	4/15/06						
0.0	+/-	0.30	CHECKED	IP	4/15/06						
0.00	+/-	0.15	CHECKED								
FRACTIONS +/-			DRAWING FILE :			TITLE					
ANGLES +/-			3°								
FOR MATERIALS AND FINISHES SEE NOTES			DRAWING\SATA\CSSATA10101021X.DWG			SLIMLINE SATA REC CONNECTOR					
REMOVE SHARP EDGES			ANGLE OF PROJECTION								
DIMENSIONS						SIZE		DRAWING NO.	REV.		
U.S.		INCHES				A3		C SSATA-101-0102-1-X		A	
(METRIC)		(MM)				SCALE		NONE		SHEET 1 OF 1	