


D2PH-1 (SMT)






A = .079" [2.00] x No. of positions
B = .079" [2.00] x No. of spaces

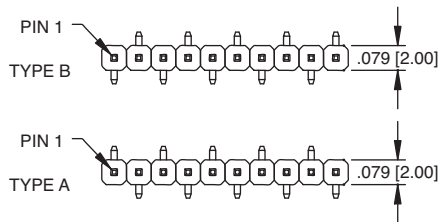


D2PH-1-12-U-.100/SMT/.240


Recommended PCB Layouts

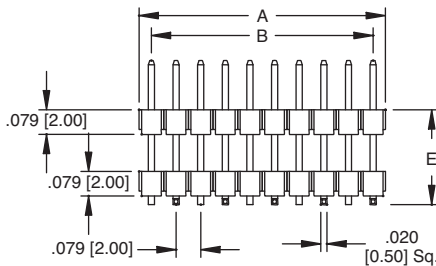


SMT-A



SMT-B


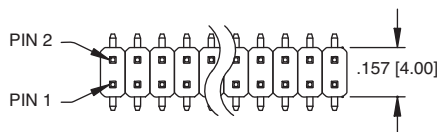


A = .079" [2.00] x No. of positions
B = .079" [2.00] x No. of spaces




D2PH-2-16-U-.145/SMT/.360


D2PH-2 (SMT)

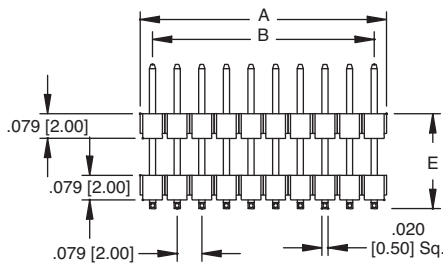


Recommended PCB Layouts

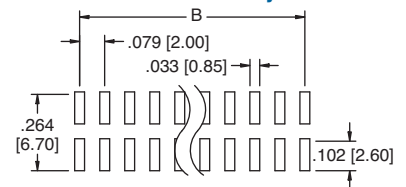


MS2A




MS2B




MS2C



MS2H-1 RIGID SHORT HANDLE

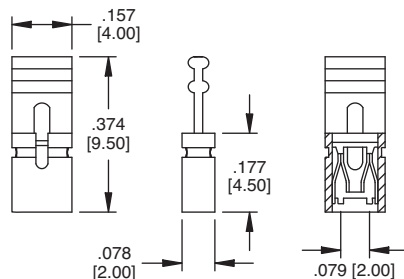

MS2H-2 FLEXIBLE LONG HANDLE

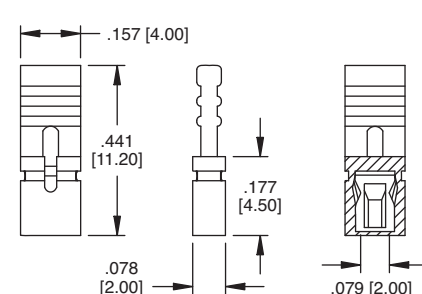

INTRODUCTION:

Adam Tech MS Series Mini Shunts are available in .050", 2.0mm, .100" and .200" centerlines. They quickly and easily jump individual pins on pin headers to perform manual programming on PCB's. This series offers a broad range of sizes, shapes and colors. Shunts are designed with detents at top for easy fingertip installation and removal. Options include integrated pull tabs and gang types which are molded in one piece. This series is extremely low cost and is a highly economical, cost effective solution to replacing PCB switches. Adam Tech's shunts are available in Gold or Tin plating.

FEATURES:

Electrically connects two or more pin header posts
Wide variety of bodies and styles to choose from
Superior insulator design provides easy Fingertip extraction
Pull Tab and Ganged options available
Choice of Gold or Tin-plated contact area
Side and end stackable

MATING OPTIONS:

Mates with .025" sq. pin headers on .100" centers and all industry standard pin headers with .025" square post on .100" [2.54mm] centerlines.

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL94V-0
Insulator Color: Black
Contacts: Phosphor Bronze

Contact Plating:

G = Gold flash (30u" optional) over nickel underplate overall
T = Tin over copper underplate overall

Electrical:

Operating voltage: 250V AC max.
Current rating: 3 Amps max
Contact resistance: 20 mΩ max. initial
Insulation resistance: 5000 MΩ min.
Dielectric withstanding voltage: 1000V AC for 1 minute

Mechanical:

Insertion force: 1.57 lbs max.
Withdrawal force: .65 lbs min
Mating durability: 50 Cycles Gold
20 Cycles Tin

Temperature Rating:

Operating temperature: -40°C to +105°C

PACKAGING:

Anti-ESD plastic bags

SAFETY AGENCY APPROVALS:

UL Recognized & CSA Certified, File no. E224053



ORDERING INFORMATION

MSB

G

BODY STYLE/HEIGHT

MSA = Closed top, .256"
MSB = Open top, .236"
MSC = Open top, .177"
MSDA = Closed top, .315"
MSDB = Open top, .315"
MSBH = Handle-top, .531"
HMSA = .050" Mini Shunt (1 x 2)
HMSB = .050" Mini Shunt (2 x 2)
HMSC = .050" Mini Shunt, .118"
MSE = Closed top, 3 position
MST = 10 piece strip
MSBG = Ganged, block type
(Specify # of positions, 2 thru 10)

PLATING

G = Gold plated
T = Tin plated

2.00mm Shunts - Pg. 283

OPTIONS:

Add designator(s) to end of part number
30 = 30 μin gold plating in contact area

STANDARD INSULATOR COLOR IS BLACK

Other insulator colors available
Add designator(s) to end of part number

R = Red *
B = Blue *
W = White *
Y = Yellow *
G = Green *
* Minimum order required

MSA .100"	MSB .100"	
MSC .100"	MSDA .100"	
MSDB .100"	MSBH .100"	
HMSA (1 X 2) .050"	HMSB (2 X 2) .050"	MSE .200" 3P JUMPER
A - .100 [2.54] X No of Positions B = .100 [2.54] X No of Spaces MSBG .100" GANGED BLOCK		MST .100" 10 pc. STRIP