


787653-3 Product Details

Have a Question?

Chat with a Product Information Specialist

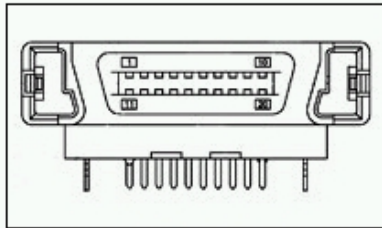

787653-3

TE Internal Number: 787653-3

 Active

1.27 [.050] Series I, HD, FH and J Connectors

 Always EU RoHS/ELV Compliant ([Statement of Compliance](#))

Product Highlights:

- Connector
- Applies To Printed Circuit Board
- Housing Gender = Receptacle
- 20 Positions
- 1.27 mm Centerline

[View all Features](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

 [Add to My Part List](#)  [Request Sample](#)  [Find Similar Products](#)  [Buy Product](#)

Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Connector
- [Profile](#) = Standard
- [PCB Mount Style](#) = Through Hole
- [PCB Mount Retention](#) = With
- [PCB Mount Angle](#) = Right Angle
- [Type of Connector](#) = Blindmate
- [PCB Mount Polarization](#) = Without
- [Retention Leg Material](#) = Brass
- [Color](#) = Black
- [Sealed Bottom](#) = Without
- [Product Series](#) = Series I

Mechanical Attachment:

- [Retention Leg Plating](#) = Tin over Nickel
- [Tine Plate Material](#) = Liquid Crystal Polymer (LCP)

Termination Related Features:

- [Termination Post Length \(mm \[in\]\)](#) = 2.54 [0.100]
- [Solder Tail Contact Plating](#) = Tin over Nickel

Body Related Features:

- [Number of Positions](#) = 20
- [Centerline \(mm \[in\]\)](#) = 1.27 [0.050]
- [PCB Mount Retention Type](#) = Boardlock(s)

Contact Related Features:

- [Contact Plating, Mating Area, Material](#) = Gold (30)
- [Contact Base Material](#) = Phosphor Bronze

Housing Related Features:

- [Housing Gender](#) = Receptacle
- [Housing Temperature Rating](#) = High
- [Housing Material](#) = Liquid Crystal Polymer (LCP)
- [UL Flammability Rating](#) = UL 94V-0

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C, Reflow solder capable to 245°C, Reflow solder capable to 260°C, Pin-in-Paste capable to 245°C, Pin-in-Paste capable to 260°C
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

Conditions for Usage:

- [Applies To](#) = Printed Circuit Board

Operation/Application:

- [Application](#) = Fibre Channel Disk Drive, High Speed Serial Data, SCA2 (Single Connector Attachment)

Other:

- [Brand](#) = AMP

 BOOKMARK 

Corporate Information

Who We Are
Investors
News Room
Supplier Portal
Careers

Quick Links

Check Distributor Inventory
Cross Reference
Find Documents & Drawings
Product Compliance Support Center
Site Map

Customer Support

Email or Chat with Us
Find a Phone Number
Search Knowledge Base
Manage Your Account

Sign up for our eNewsletter

Enter your email address 

Follow us on: 