

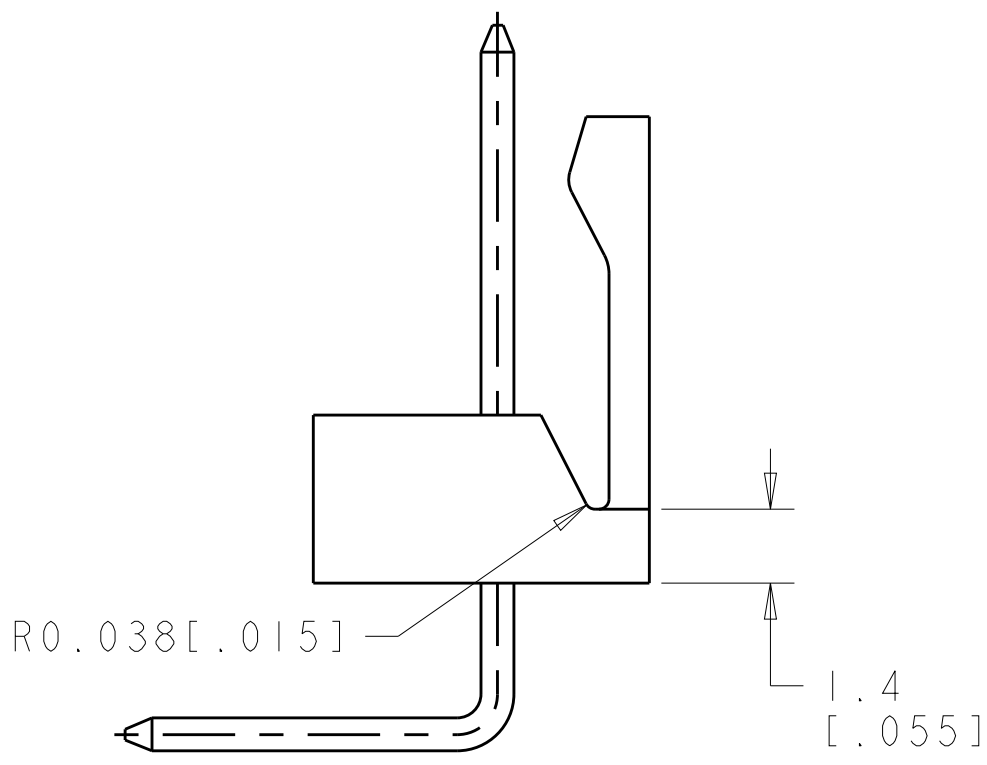
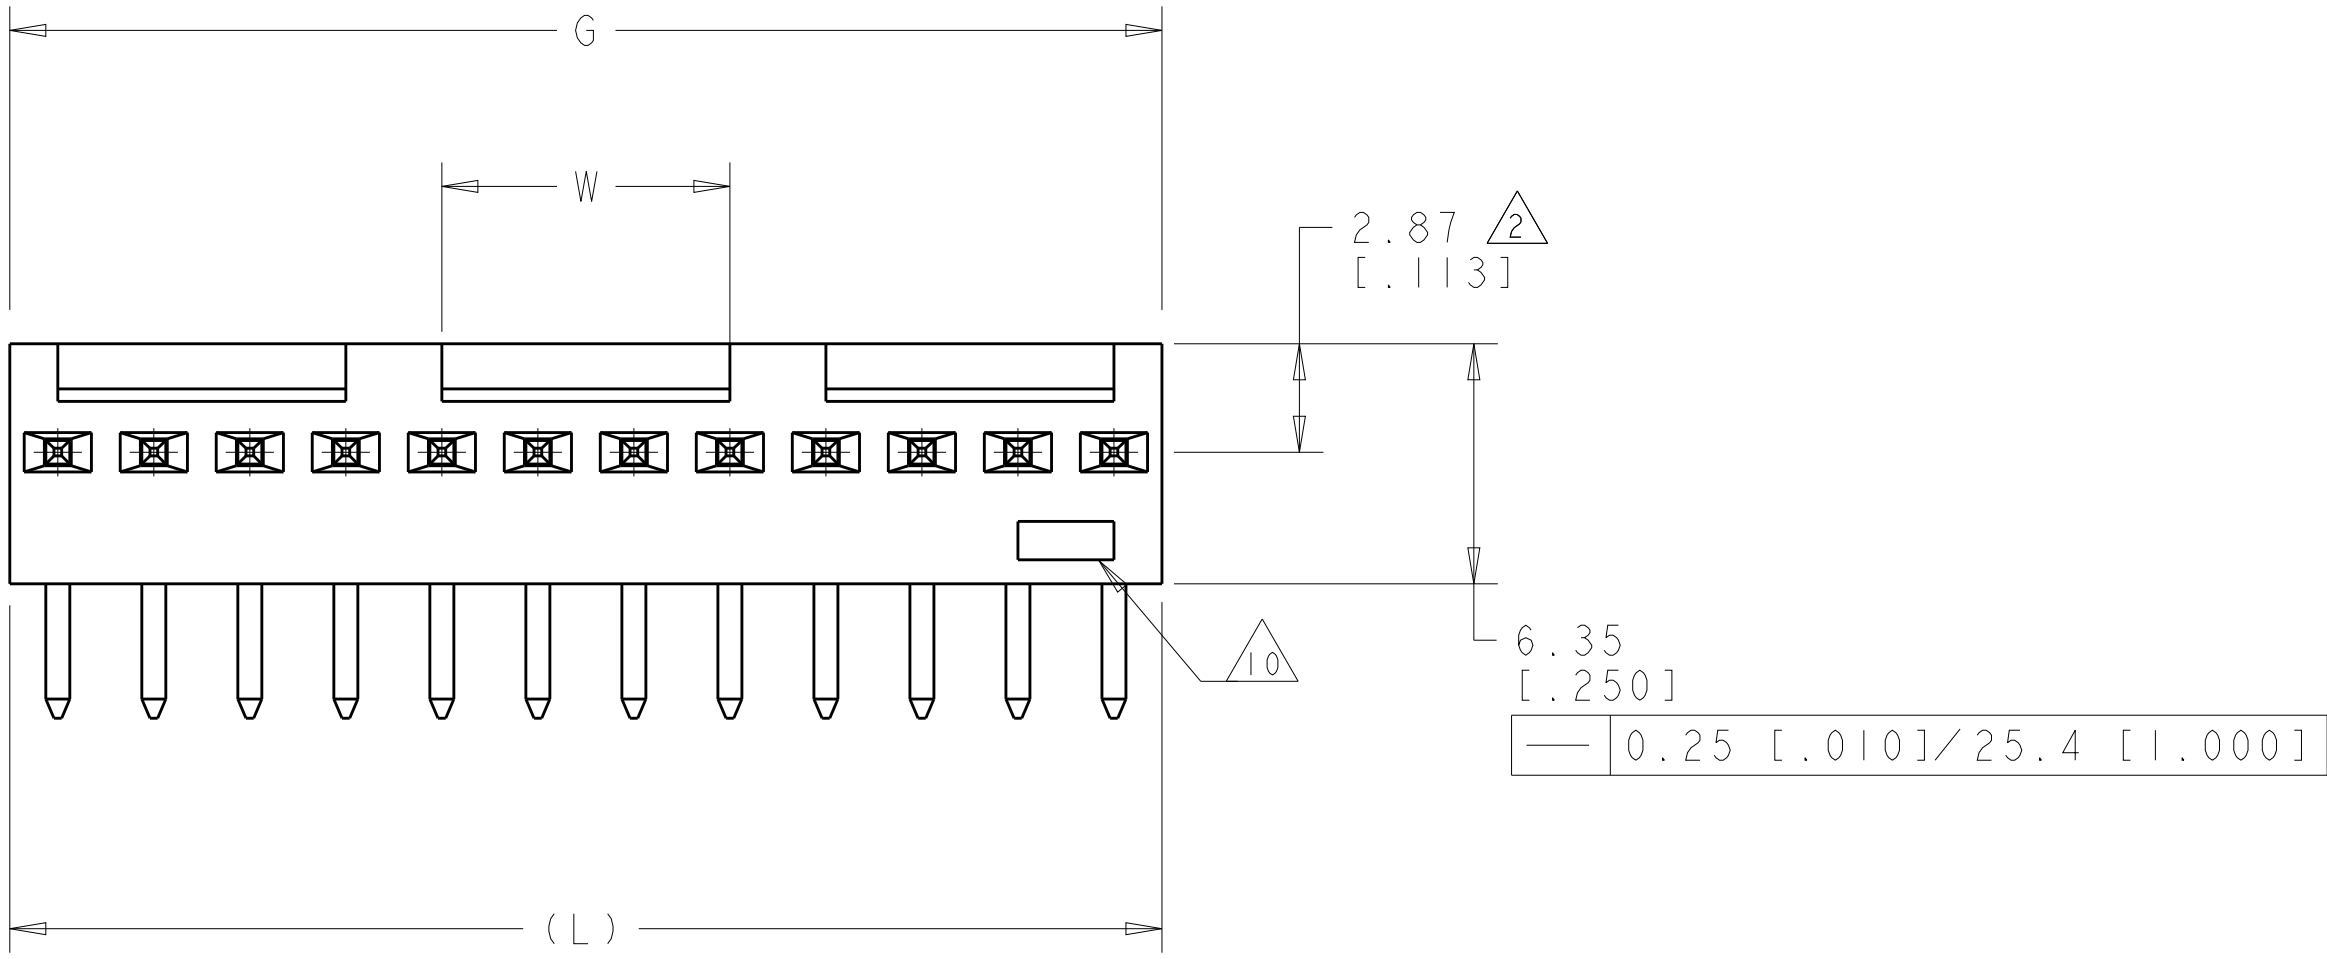
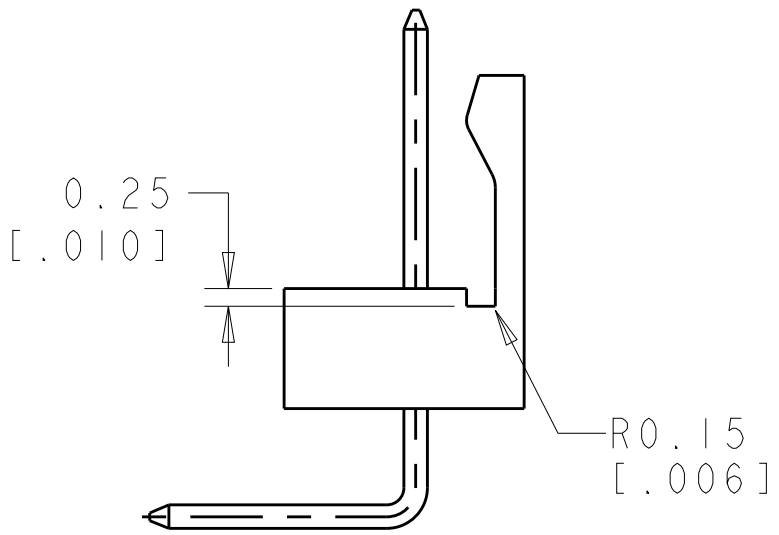
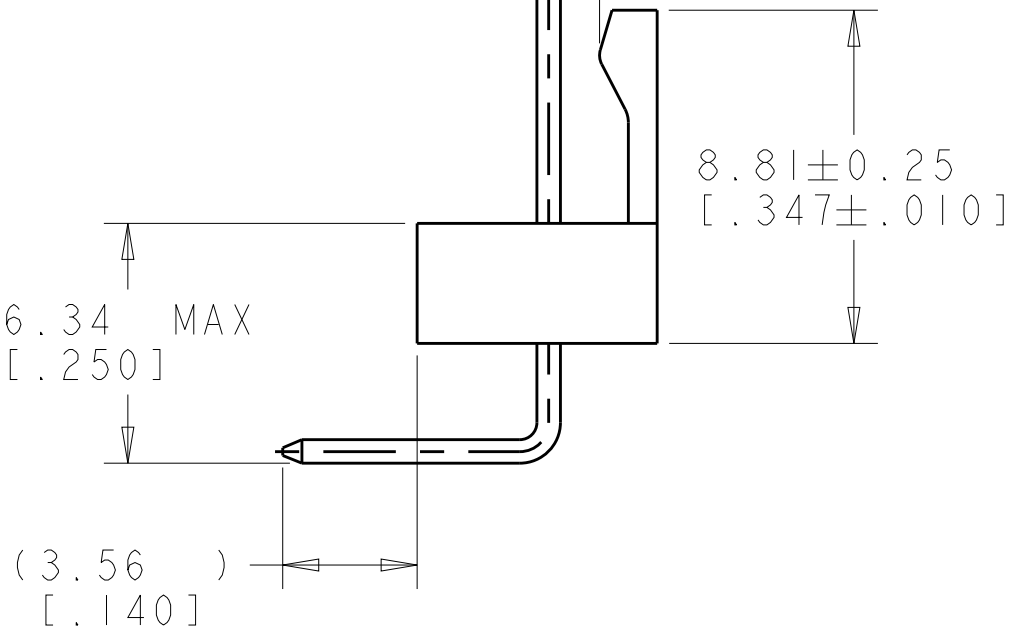



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CM	00	P2		REVISED PER ECR-18-004355	18JUN2018	BDA
		R		REVISED PER ECR-19-015071	18OCT2019	BDA






TYPICAL END VIEW
FOR 4 THROUGH 7 POSITION

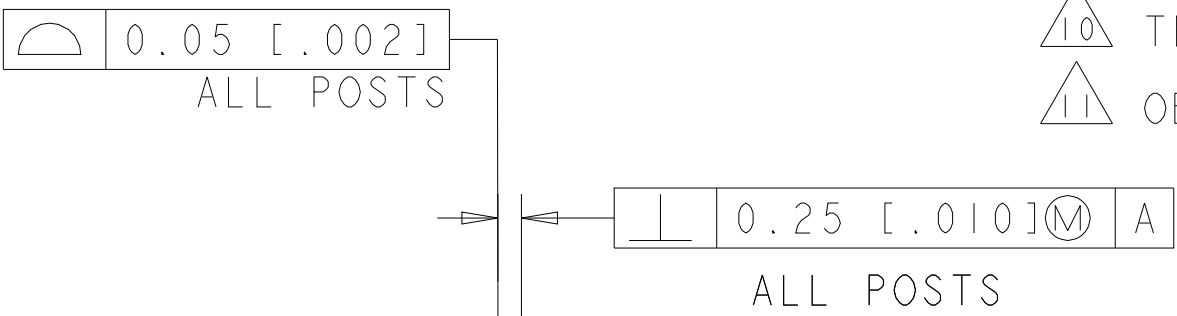

TYPICAL END VIEW
FOR 2 POSITION ONLY

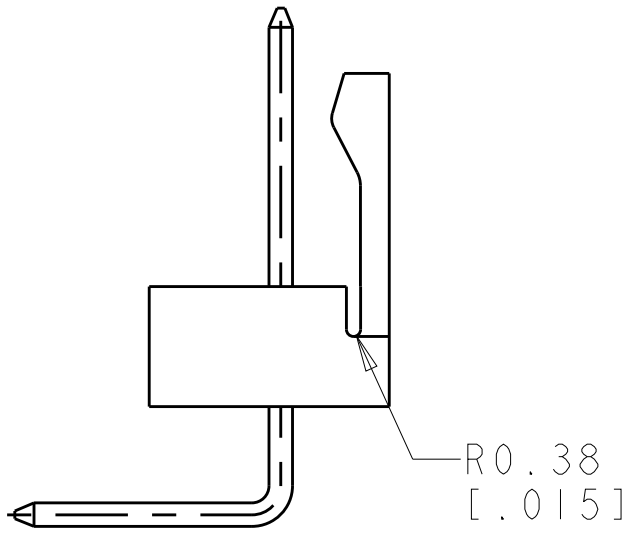

TYPICAL END VIEW
FOR 3 POSITION ONLY

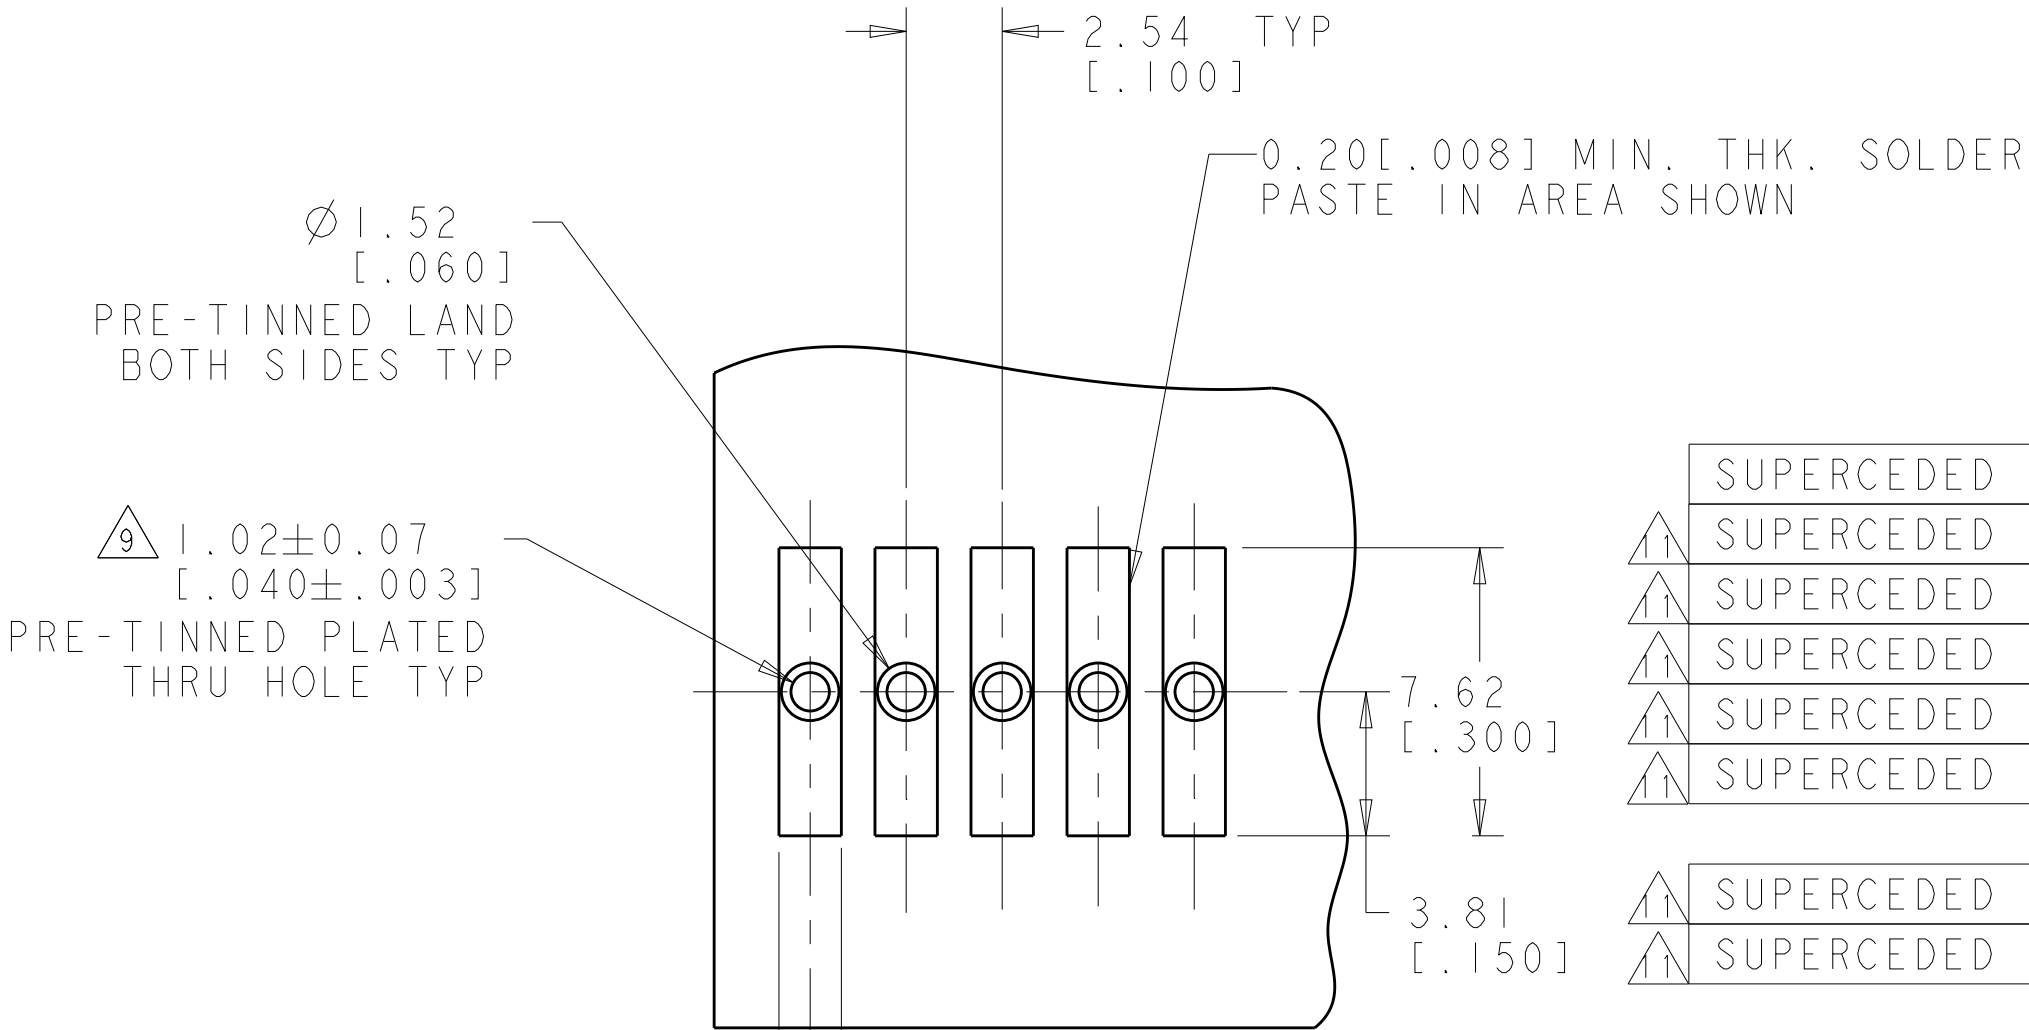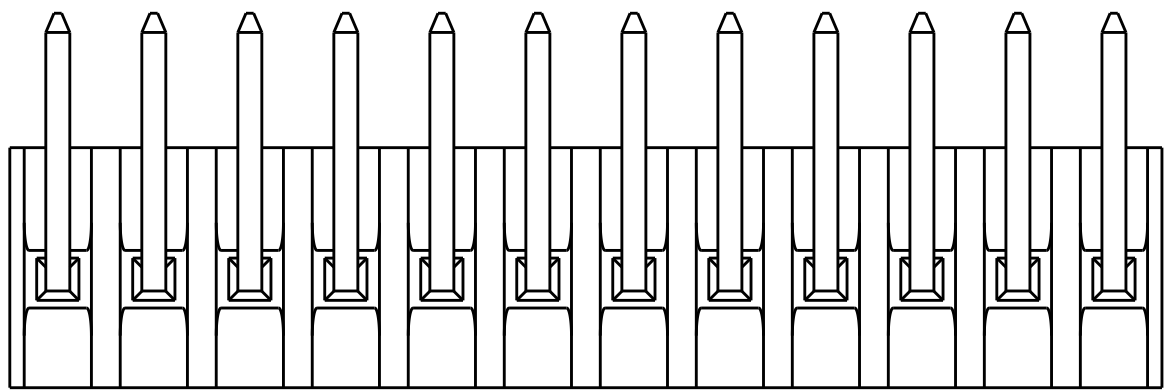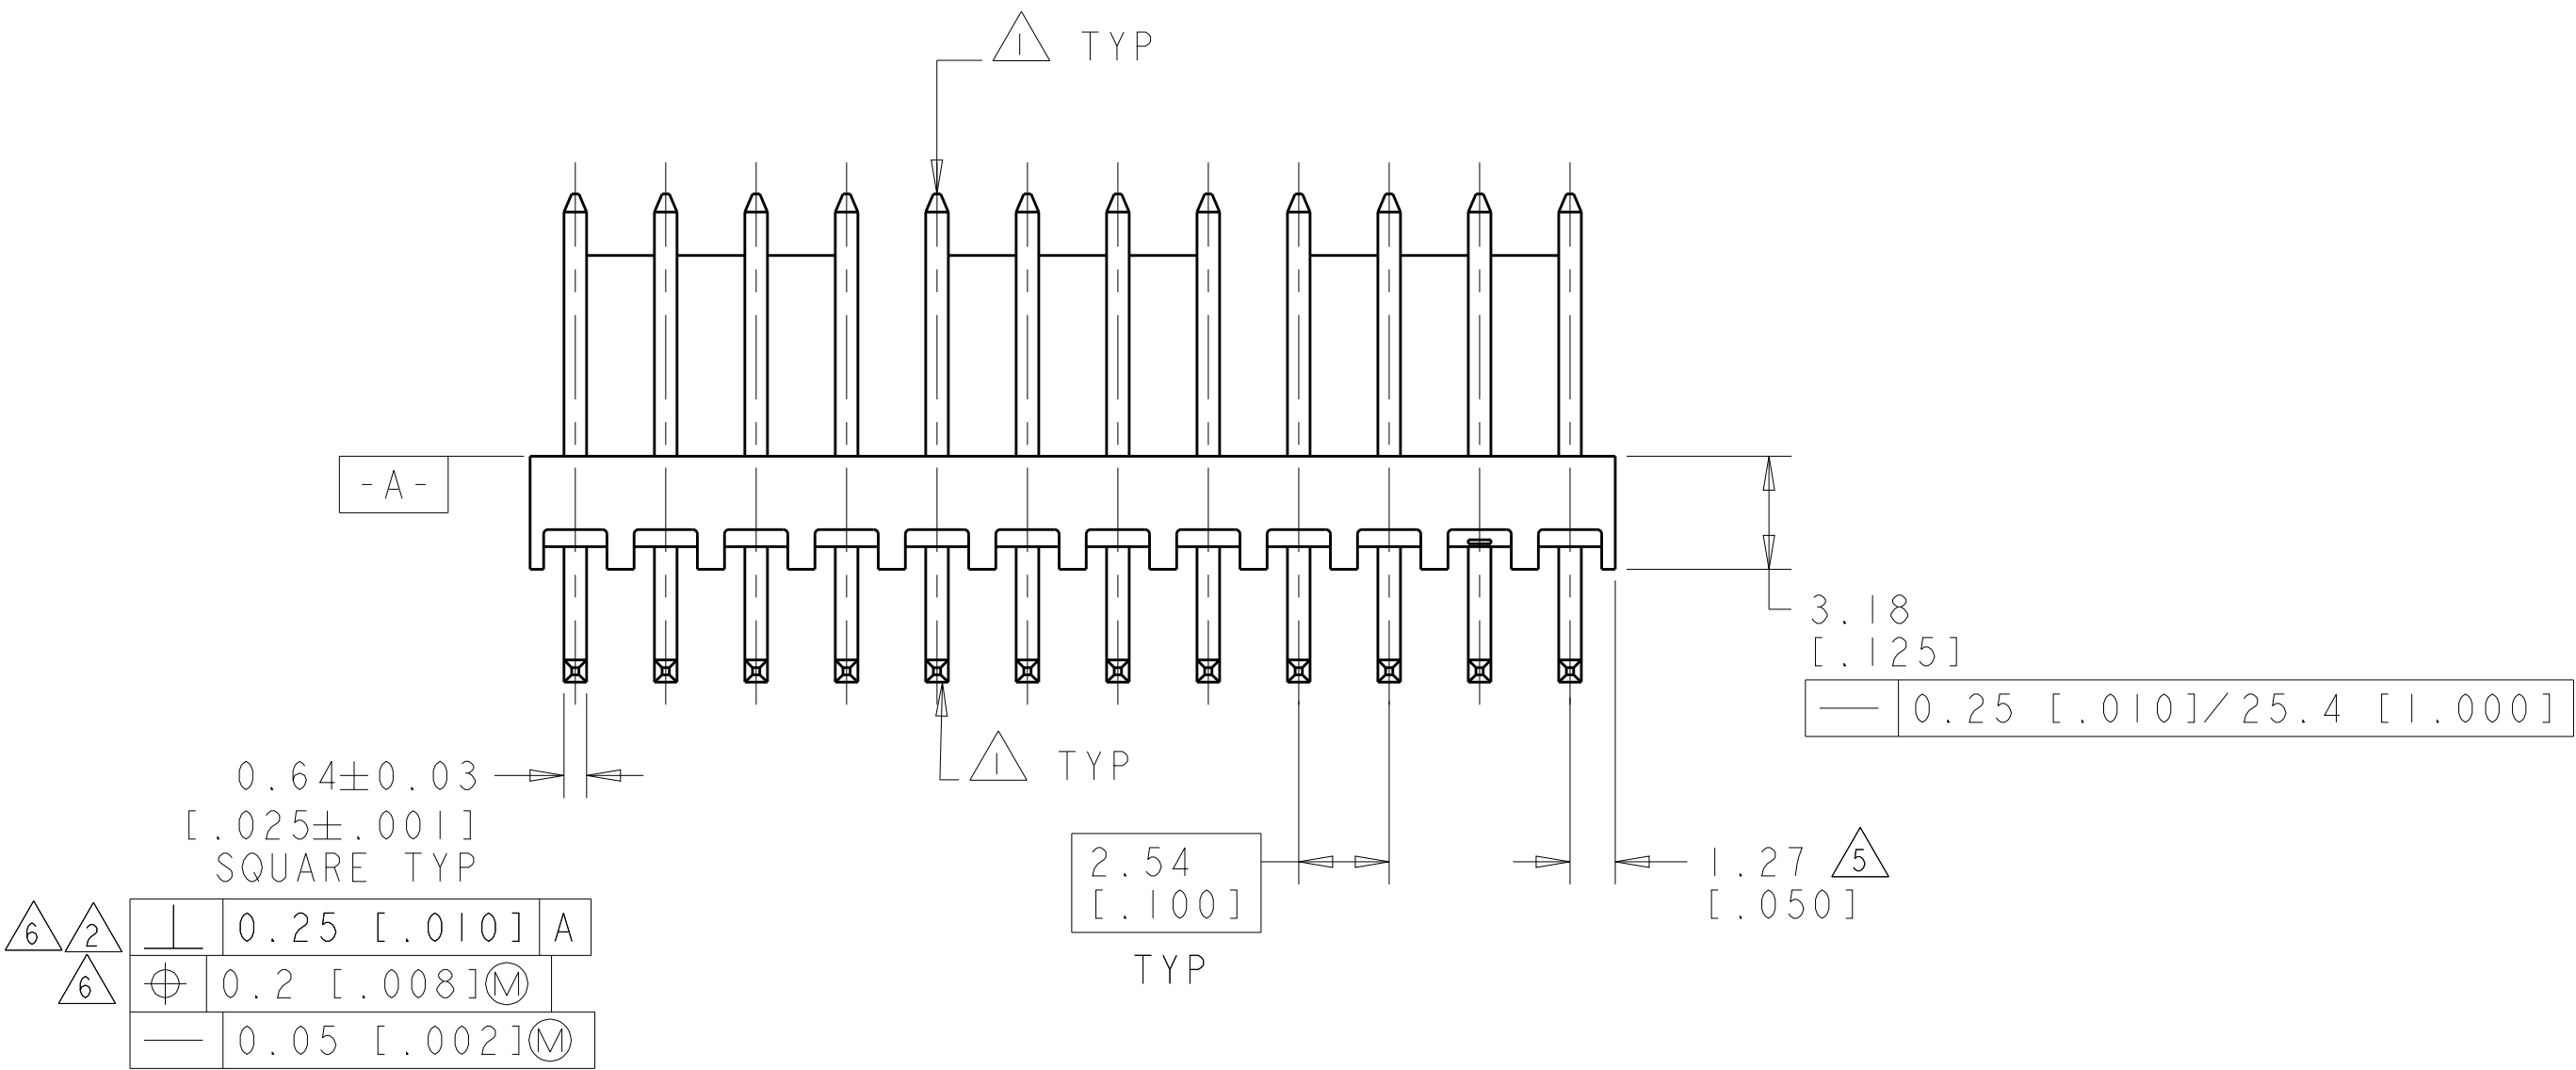

SUPERCEDED BY 4-647050-2	
SUPERCEDED BY 4-647050-1	
SUPERCEDED BY 4-647050-0	
SUPERCEDED BY 3-647051-9	
SUPERCEDED BY 3-647051-8	
SUPERCEDED BY 3-647051-7	
OBSOLETE	
SUPERCEDED BY 3-647051-5	
SUPERCEDED BY 3-647051-4	
OBSOLETE	
OBSOLETE	

7.62 [1.300]	12.70 [1.500]	30.48 [1.200]	12	4-647051-2
-	10.16 [1.400]	27.94 [1.100]	11	4-647051-1
-	7.62 [1.300]	25.40 [1.000]	10	4-647051-0
-	5.08 [1.200]	22.86 [1.900]	9	3-647051-9
-	2.54 [1.000]	20.32 [1.800]	8	3-647051-8
-	-	17.78 [1.700]	7	3-647051-7
-	-	15.24 [1.600]	6	3-647051-6
-	-	12.70 [1.500]	5	3-647051-5
-	-	10.16 [1.400]	4	3-647051-4
-	-	7.62 [1.300]	3	3-647051-3
-	-	5.08 [1.200]	2	3-647051-2
7.62 [1.300]	12.70 [1.500]	30.48 [1.200]	12	1-647051-2
-	10.16 [1.400]	27.94 [1.100]	11	1-647051-1
-	7.62 [1.300]	25.40 [1.000]	10	1-647051-0
-	5.08 [1.200]	22.86 [1.900]	9	647051-9
-	2.54 [1.000]	20.32 [1.800]	8	647051-8
-	-	17.78 [1.700]	7	647051-7
-	-	15.24 [1.600]	6	647051-6
-	-	12.70 [1.500]	5	647051-5
-	-	10.16 [1.400]	4	647051-4
-	-	7.62 [1.300]	3	647051-3
-	-	5.08 [1.200]	2	647051-2
W	G	L	NO OF POSN	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. WHITAKER 3-NOV-2001	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK D. BOSSI 13-NOV-2001	NAME MTA-100 HEADER ASSY, HIGH TEMPERATURE FRICTION LOCK, .025 SQUARE, RIGHT ANGLE POST, TIN OR TIN-LEAD PLATED	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BOSSI	PRODUCT SPEC	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ±		± ± ± ± ± ± ±	APPLICATION SPEC	
MATERIAL : 4		± : 4	WEIGHT	
			CUSTOMER DRAWING	
			SCALE 7:1	
			SHEET 1 OF 1	
			REV R	

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57±0.20 [0.062±0.008] THICK P.C. BOARD