

Low Profile, Surface Mount (Continued)

Rectangular Socket —
32 Positions

Materials and Finish


Housing — Polyphenylene sulfide,
40% glass filled, UL 94V-0 rated

Contacts — Phosphor bronze with
0.00508 [.000200] 93/7 tin-lead per
ML-T-10727 Type I over 0.00127
[.000050] nickel per QQ-N-290


Packaging Quantities

28 Pcs/Tube*, 70 Tubes/Box
Total = 1960 Pcs/Box
Tape Mounted = 400/Reel*

*Minimum order quantity.

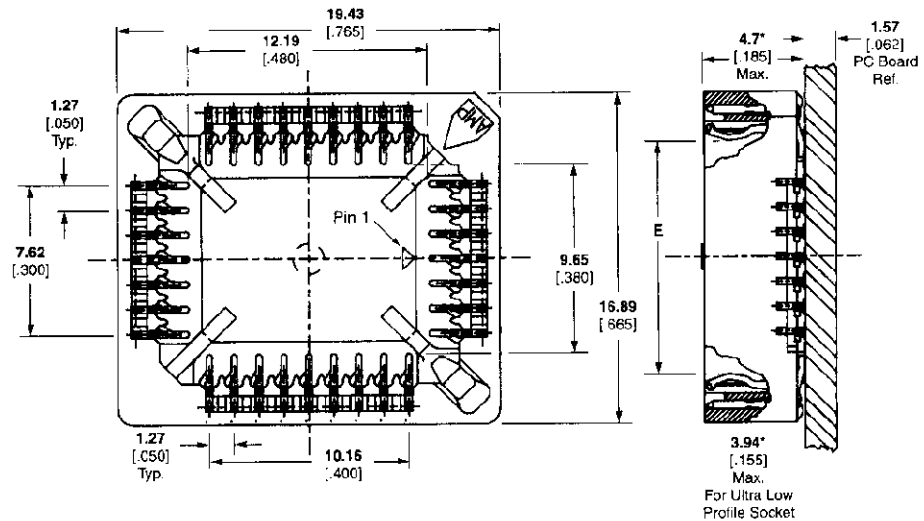

Extraction Tool
Part No. 821980-1

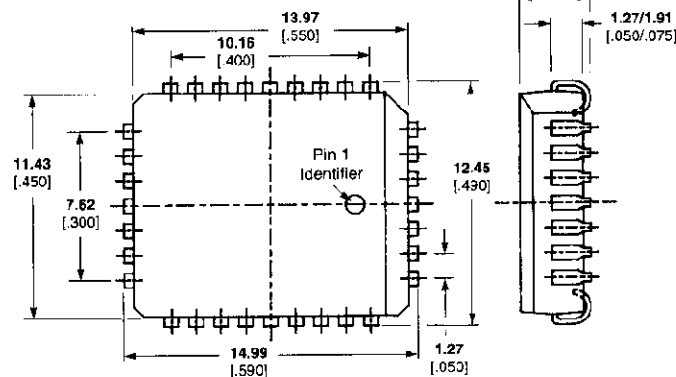

All Purpose Tool
Part No. 822154-1



Recommended Chip Carrier

No. of Pos.	Dimension		Low Insertion Force	
	E	Description	Without Locating Posts	Tape Mounted Without Locating Posts
32	14.44 .564	Long Side (9 Contacts)	822273-1	3-822273-1
	11.79 .464	Short Side (7 Contacts)		

No. of Pos.	Dimension		Ultra Low Profile Socket	
	E	Description	Without Locating Posts	Tape Mounted Without Locating Posts
32	14.35 .565	Long Side (9 Contacts)	822403-1	3-822403-1
	11.81 .465	Short Side (7 Contacts)		