





SIMM Sockets — with Plastic Latches, .050 [1.27] CL (Continued)

Low Profile (25°) Single Row (Standard Footprint)

Material and Finish

Housing — Liquid Crystal Polymer (LCP) UL 94V-0

Contacts — Phosphor bronze with .000200 [0.00508] min. thick tin-lead over .000050 [0.00127] min. thick nickel or .000030 [0.00076] min. thick gold on contact area and .000150 [0.0038] min. thick tin-lead on solder tails, all over .000050 [0.00127] min. thick nickel

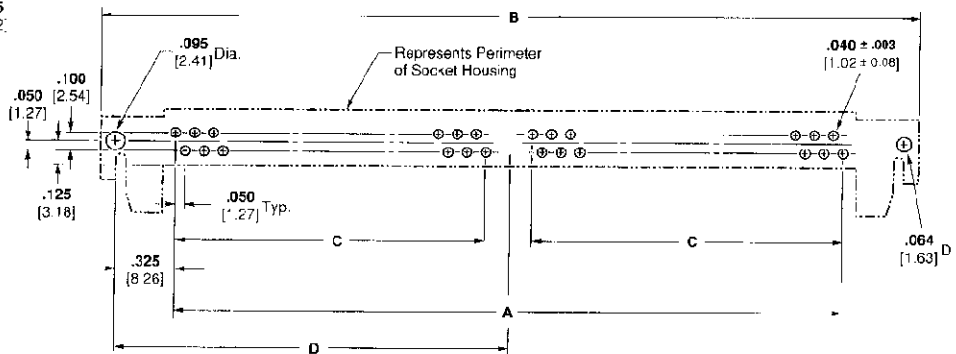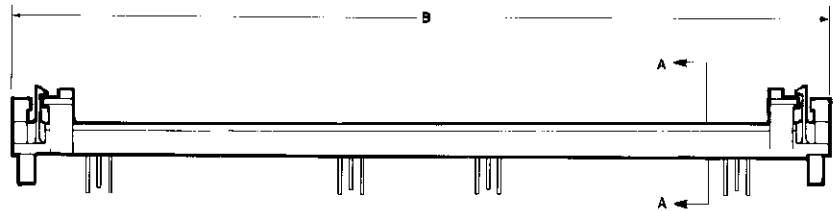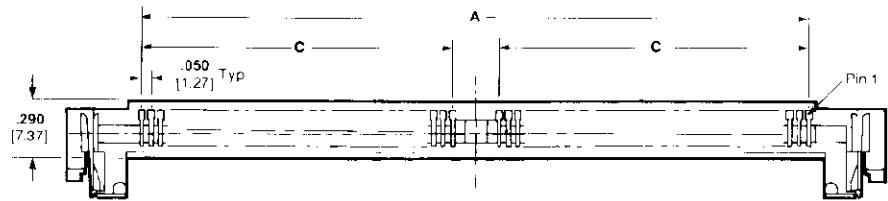

Recommended PC Board Hole Pattern

No. of Pos.	Dimensions				Tin Plate	Gold Plate
	A	B	C	D		
72	3.750 95.25	4.550 115.57	1.750 44.45	2.200 55.88	821947-7	821950-7

Note: See page 25 for module layout.