

Type C Right Angle Pin Assemblies with Solder Posts (with and without Boardlocks)

(Continued)

Third Size

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number
		A	B	C	D			
30	A,B,C	38.12	33.02	22.86	33.12	3.00	II	6-1393644-9
		1.501	1.300	.900	1.304	.118		7-1393644-11
20	A,C	38.12	33.02	22.86	33.12	3.00	II	7-1393644-0
		1.501	1.300	.900	1.304	.118		7-1393644-21

¹ With Boardlocks

Note: Select load and MFBL available upon request, contact Product Engineering.



Expanded Size

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number
		A	B	C	D			
120	A,B,C	114.30	109.22	99.06	105.61	2.64	II	650906-5
		4.500	4.300	3.900	4.158	.104		650914-5 ¹
						3.30	II	650949-5
150	A,B,C	139.70	134.62	124.46	130.01	2.64	II	650907-5
		5.500	5.300	4.900	5.158	.104		650915-5 ¹

¹ With Boardlocks

Note: Select load and MFBL available upon request, contact Product Engineering.

Type C Right Angle Pin Assemblies with Solder Posts and Guides

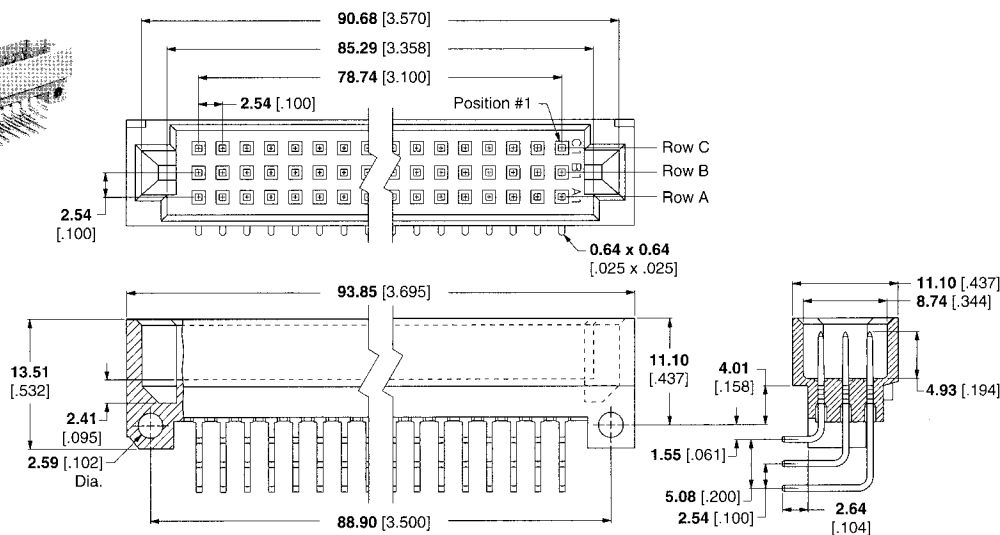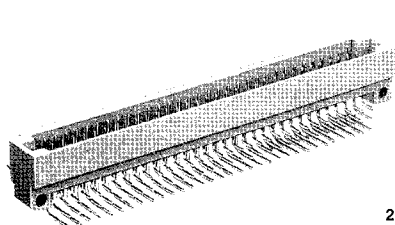

Material

Housing — Glass filled polymer

Contacts — Copper alloy

Related Product Data

DIN Performance Levels — Page 6

Performance Specifications —

Page 7

Mateable Connectors — Page 22

PC Board Hole Layout — Page 59

Accessories — Page 64

Technical Documents — Page 74:

DIN Specification 41612

IEC Specification 60603-2

Application Specification 114-9014

Instruction Sheet 408-6784

Number of Positions	Rows Loaded	DIN Level	Part Number
96	A,B,C	II	148003-5