

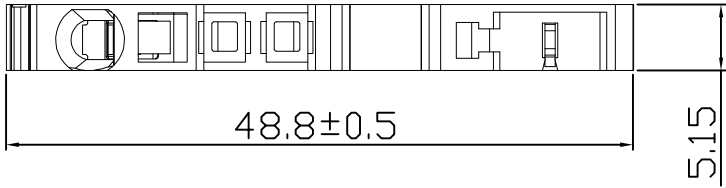
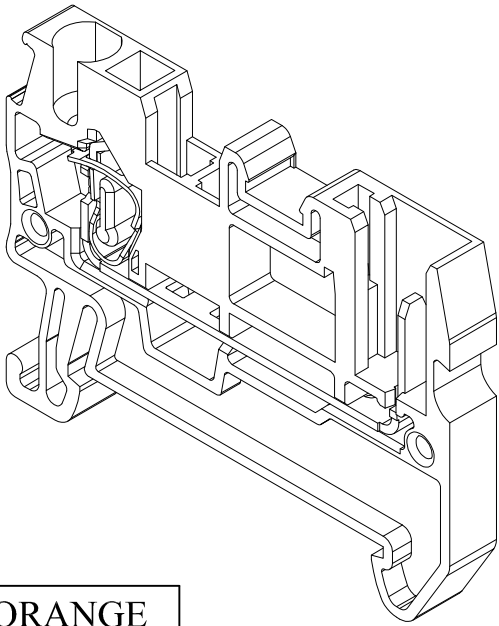


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	PER ECR-17-002267	01MAR2017	F.Y	X.X

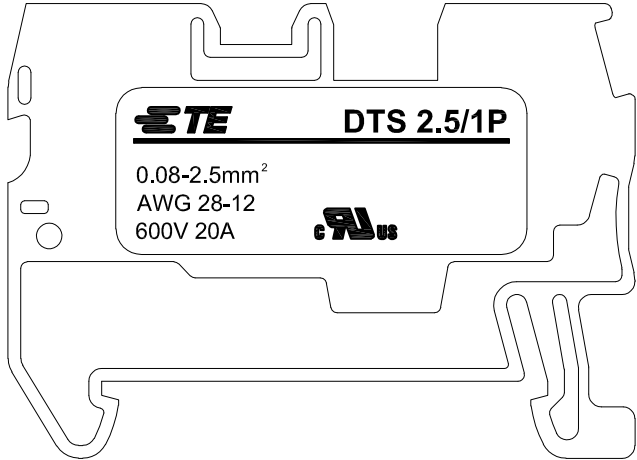

3	SPRING CLAMP	STAINLESS STEEL	1	
2	TERMINAL	COPPER	1	Matte Tin Plated
1	HOUSING	THERMOPLASTIC	1	
ITEM	COMPONENTS	MATERIAL	Q'TY	PLATING

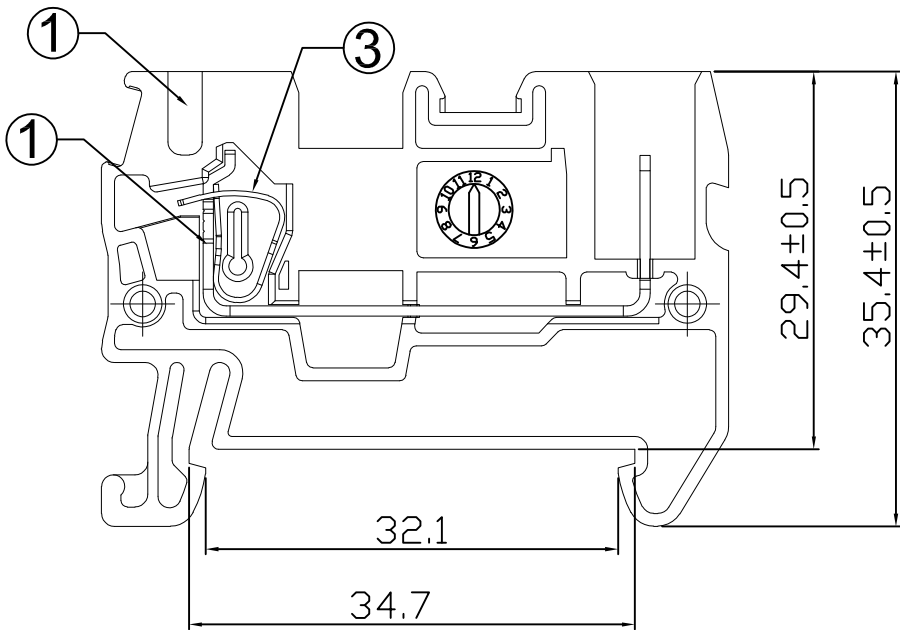

DTS 2.5/1P	2271576-3	ORANGE
	2271576-2	BLUE
	2271576-1	GRAY
TE SERIES No.	PART NUMBER	COLOR

- NOTE:
- 1. Material: See Table
 - 2. Rated current & voltage : 300V,20A(B&C Class); 600V,5A(D Class)
 - 3. Rated surge voltage: 6KV
 - 4. Operation temperature : -40°C to +105°C
 - 5. Wire strip length: 8mm -10mm
 - 6. Suitable wire size : 28 - 12AWG
 - 7. Requirement for environmental substance must be compliance with ROHS and REACH.
 - 8. Recommended support rail requirements refer to 114 application specification.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.50
1 PLC	± 0.40
2 PLC	± 0.30
3 PLC	± -
4 PLC	± -
ANGLES	± 3°
FINISH	-

DWN
FENCER YU
01MAR2017

CHK
XIANG XU
01MAR2017

APVD
XIANG XU
01MAR2017

PRODUCT SPEC
108-137138

APPLICATION SPEC
114-137138

WEIGHT
5 g

CUSTOMER DRAWING

TE Connectivity

NAME
2.5MM² SECTION WIRE 1 IN 1 OUT
SPRING TYPE PLUG IN TERMINAL BLOCK

SIZE A3	CAGE CODE 00779	DRAWING NO C-2271576	RESTRICTED TO -
------------	--------------------	-------------------------	--------------------

SCALE 1:1	SHEET 1 OF 1	REV A2
--------------	-----------------	-----------