



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	PER ECR-17-001806	10FEB2017	F.Y	X.X

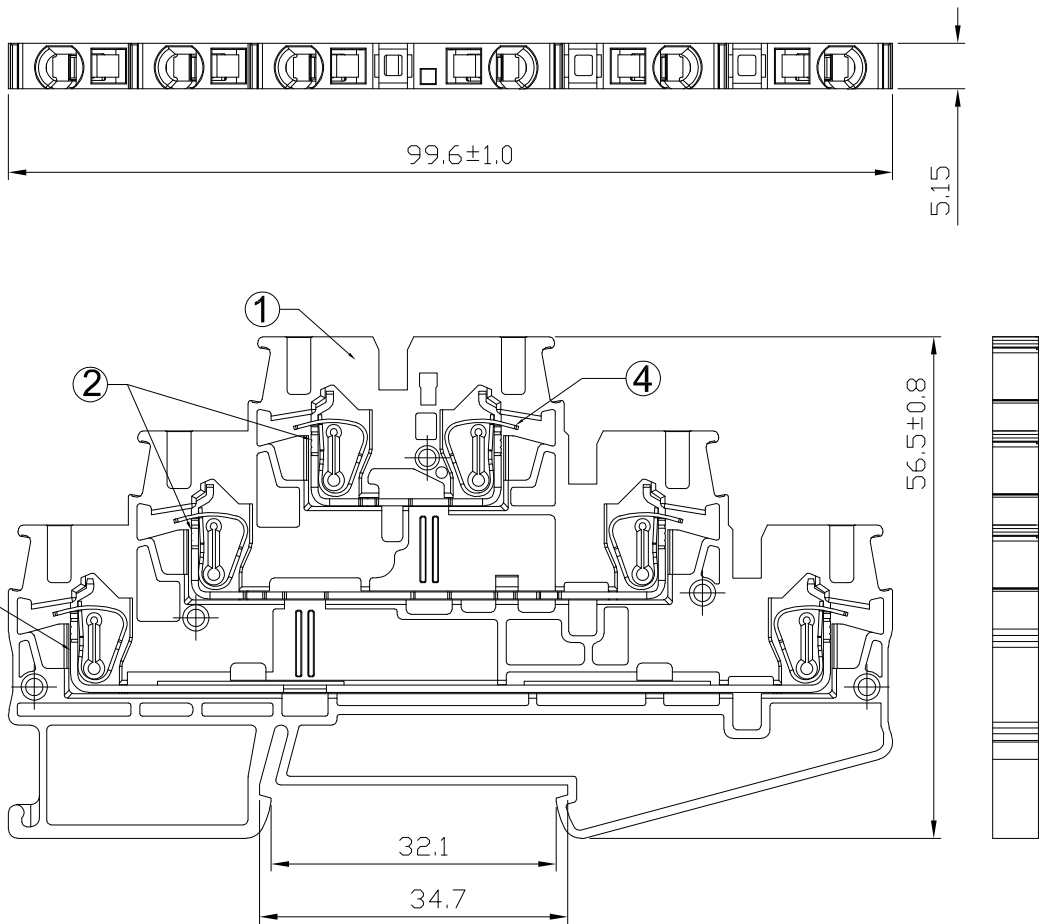


4	SPRING CLAMP	STAINLESS STEEL	6	
3	TERMINAL	COPPER	1	Tin Plated
2	TERMINAL	COPPER	2	Matte Tin Plated
1	HOUSING	THERMOPLASTIC	1	
ITEM	COMPONENTS	MATERIAL	Q'TY	PLATING

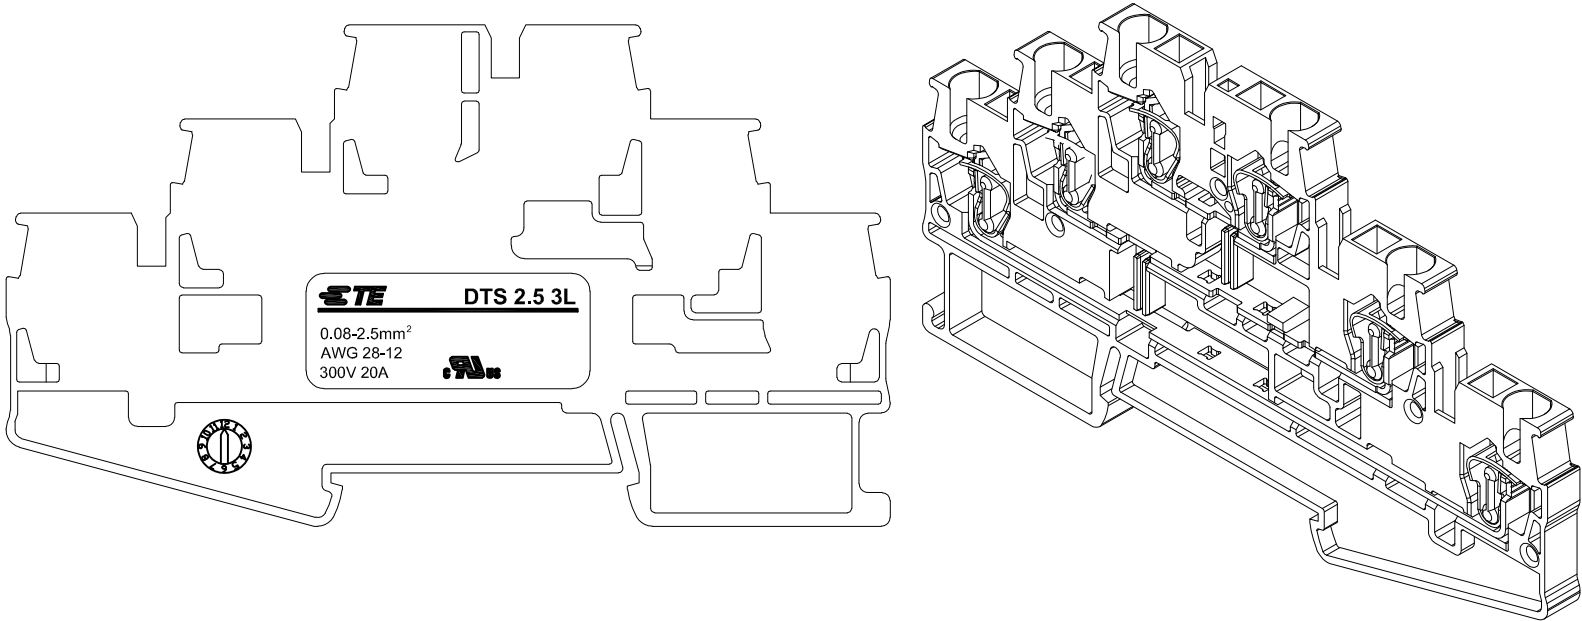

NOTE:

1. Material: See Table
2. Rated current & voltage : 20Amp 300V
3. Rated surge voltage: 6KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 8mm -10mm
6. Suitable wire size : 28 - 12AWG
7. Requirement for environmental substance must be compliance with ROHS and REACH.
8. Recommended support rail requirements refer to 114 application specification.

DTS2.5 3L	2271736-5	BLACK
	2271736-4	RED
	2271736-3	ORANGE
	2271736-2	BLUE
	2271736-1	GRAY
TE SERIES No.	PART NUMBER	COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN FENCER YU 10FEB2017	 TE Connectivity					
		CHK XIANG XU 10FEB2017						
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD XIANG XU 10FEB2017	NAME 2.5 MM^2 SECTION WIRE 1 IN 1 OUT THREE LAYERS SPRING TYPE TERMINAL BLOCK —					
	0 PLC ± 0.50 1 PLC ± 0.40 2 PLC ± 0.30 3 PLC ± — 4 PLC ± — ANGLES ± 3°	PRODUCT SPEC 108—137138	SIZE A3			CAGE CODE 00779	DRAWING NO C—2271736	RESTRICTED TO —
		APPLICATION SPEC 114—137138						
MATERIAL SEE TABLE	FINISH —	WEIGHT 17 g	CUSTOMER DRAWING					
			SCALE 1:1		SHEET 1 OF 1		REV A1	