


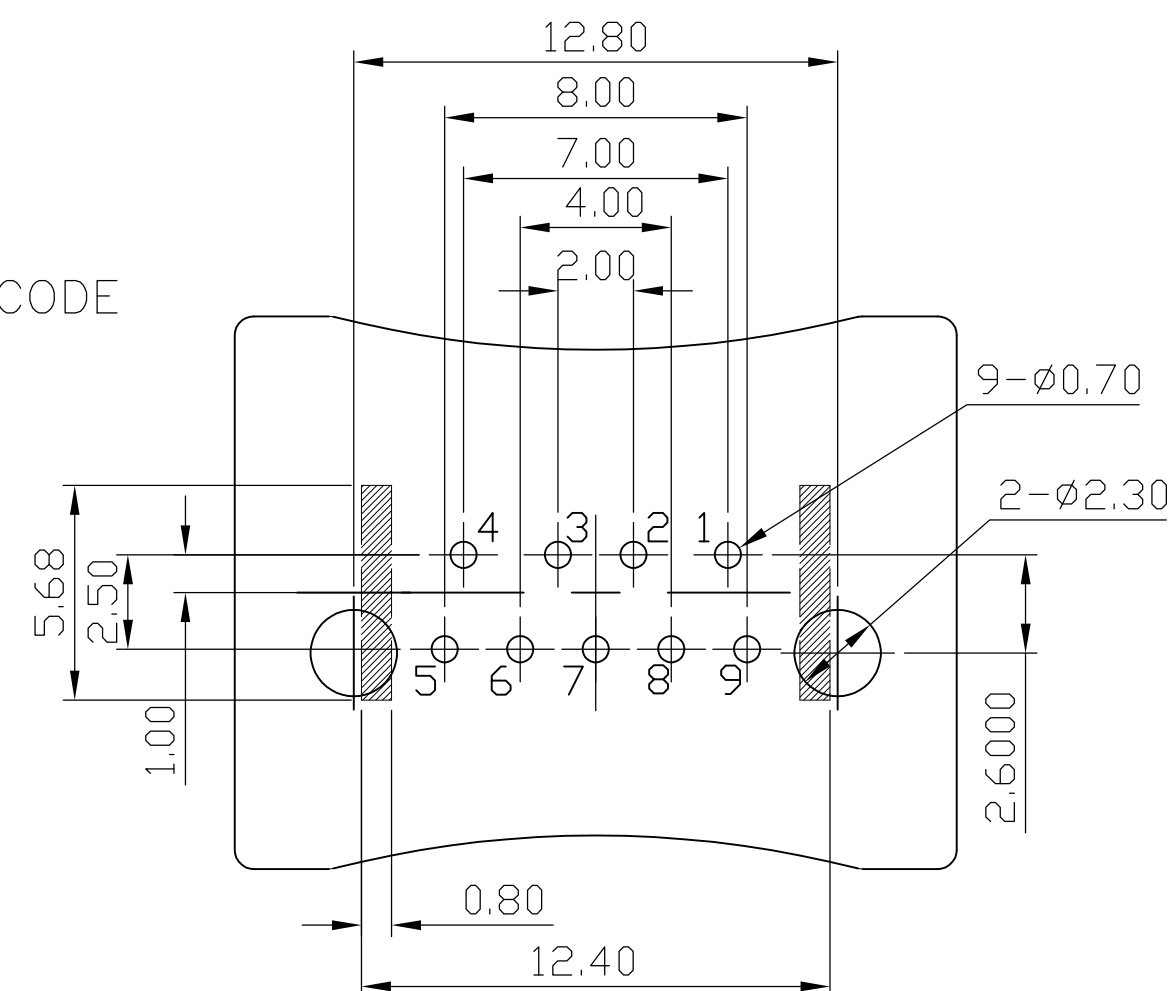

1. MATERIAL:
HOUSING AND ORGANIZER: THERMOPLASTIC, UL94V-0,
COLOR: BLUE.
CAP: THERMOPLASTIC, UL94V-0,
COLOR: BLUE
CONTACTS 1-4: PHOSPHOR BRONZE.
CONTACTS 5-9: BRASS.
SHELL: TOOL STEEL.
2. FINISH:
CONTACTS: GOLD PLATE (SEE TABLE) ON CONTACT AREA.
2.54μm MIN MATTE TIN PLATED ON SOLDER TAIL,
1.27μm MIN NICKEL UNDERPLATE OVERALL.
SHELL: 1.27μm MIN NICKEL PLATED.
3. WAVE SOLDER CAPABLE TO 265°C, PER TE SPEC 109-202, CONDITION B.
4. RECOMENDED PCB THICKNESS 1.6.

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND
5	SSRX-
6	SSRX+
7	GND_DRAIN
8	SSTX-
9	SSTX+
Shell	Shield

0.762μm	2274475-3
0.381μm	2274475-2
FLASH	2274475-1
GOLD PLATING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE 18NOV2013		 TE Connectivity											
		CHK R. WERTZ 18NOV2013													
		APVD R. WERTZ 18NOV2013													
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME USB 3.0 A TYPE, VERTICAL, WITH LOCK —											
		0 PLC ± — 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± — ANGLES ± 2°													
MATERIAL —		FINISH —		PRODUCT SPEC 108—32130		APPLICATION SPEC —		SIZE A2		GAGE CODE 00779		DRAWING NO G—2274475		RESTRICTED TO —	
CUSTOMER DRAWING				WEIGHT —				SCALE 5:1		SHEET 1 OF 1		REV B			