


2143264-1 Product Details

Share Print Email

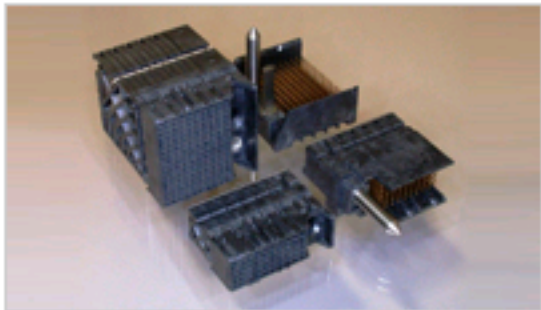

Preliminary

Impact High Density Backplane Connectors

IMP100,O,H,V6P10C,UG,REW46

2143264-1

TE Internal Number: 2143264-1

Product Highlights View All

- Connector Style = Header
- 120/Signal, 60/Ground
- 180 Positions
- Header Type = Partially Shrouded
- Board-to-Board Configuration = Orthogonal, Vertical

Pricing & Availability

Request Sample

Add to My Part List

Buy Product through
Distributor

Feedback

Documents

Features

Compliance

Please Note:

Use the Product Drawing for all design activity

Product Type Features

PCB Mount Retention Type	Action/Compliant Tail
PCB Mount Alignment Type	None

Electrical Characteristics

Impedance (Ω)	100
Operating Voltage Reference	AC/DC
Operating Voltage (VAC)	120
Operating Voltage (VDC)	120

Dimensions

Tail Length (mm [in])	1.2 [0.047]
Length (X-Axis) (mm [in])	28.35 [1.160]
Width (Z-Axis) (mm [in])	28.90 [1.1378]
Profile Height (Y-Axis) (mm [in])	11.95 [0.470]
PCB Hole Diameter (mm [in])	0.46 [0.018]

Body Features

Header Type	Partially Shrouded
-------------	--------------------

Contact Features

Contact Type	Pin
Contact Length (mm [in])	4.50 [0.177]
Contact Plating, Termination Area, Material	Matte Tin
Contact Plating, Termination Area, Thickness (µm [µin])	1.27 [50]
Contact Base Material	Copper-Nickel-Silicon
Underplate Material	Nickel
Underplate Material Thickness (µm [µin])	1.27 [50.000]

Housing Features

Connector Style	Header
End Wall Location	Right
Housing Color	Black
Housing Material	LCP (Liquid Crystal Polymer)

Configuration Features

Connector Contact Configuration (No. of Pos./Type)	120/Signal, 60/Ground
Number of Positions	180
Number of Differential Pairs Per Column	6
Number of Columns	10
Number of Rows	18
Shrouded	Yes - Partial
Guide Location	Unguided
Tail Orientation	In-line

Industry Standards

RoHS/ELV Compliance	Not reviewed for ELV/RoHS compliance
Lead Free Solder Processes	Not reviewed for lead free solder process
UL Rating	Recognized
UL File Number	E28476
UL Flammability Rating	UL 94V-0
CSA Certified	Yes

Environmental

Operating Temperature (°C [°F])	-55 - +85 [-67 - +185]
---------------------------------	------------------------

Conditions for Usage

Board-to-Board Configuration	Orthogonal, Vertical
------------------------------	----------------------

Operation/Application

Industry Application	Networking (Communications)
----------------------	-----------------------------

Packaging Features

Packaging Method	Tube/Box
------------------	----------

Other

Brand	TE Connectivity
-------	-----------------

Related Products

Not quite the product you're looking for?

Find Similar Products

View Part in Product Feature Selector

Check for Tooling

Corporate Information

About TE
Investors
News Room
Supplier Portal
Careers
Terms & Conditions
Privacy Policy
Global Accessibility Statement

Quick Links

Distributor Inventory
Product Cross Reference
Documents & Drawings
Product Compliance Support Center
Site Map

Customer Support

Email or Chat With Us
Find a Phone Number
Knowledge Base
Manage Your Account

Keep Me Informed

