

Products

Documentation

Resources

My Account

Customer Support

3-521150


-2

Product Details

Live Product Chat

US Only

8:30am - 5pm ET, Mon - Fri

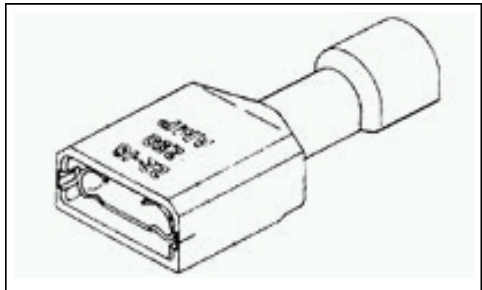

3-521150

-2

Active

Ultra

-Fast

Receptacles & Tabs

Always EU RoHS/ELV Compliant

(

Statement of Compliance

)

Product Highlights:

- ? Receptacle
- ? Proprietary Name = Ultra -Fast
- ? Receptacle Style = Straight
- ? Tab Fit = 6.35 x 0.81 mm
- ? Brass Material

View all Features

|

Find Similar

Products

Quick Links

- Check Pricing &

Availability
- Search for Tooling

Product Feature

Selector
- Contact Us About

This Product

Documentation & Additional Information	
Product Drawings: ? RECEPTACLE ASSY,ULTRA-FAST. (PDF, English) Catalog Pages/Data Sheets: ? None Available Product Specifications: ? Ultra -Fast Fully Insulated FASTON Receptacle Terminals (PDF, English) Application Specifications: ? Ultra -Fast Series 110, 125, 187, 205, and 250 Fully -... (PDF, English) Instruction Sheets: ? None Available CAD Files: ? None Available List all Documents	Additional Information: ? Product Line Information Related Products: ? Tooling

Product Features (Please use the Product Drawing for all design activity)	
Product Type Features: ? Product Type = Receptacle ? Proprietary Name = Ultra -Fast ? Receptacle Style = Straight ? Tab Fit (mm [in]) = 6.35 x 0.81 [.250 x .032] ? Material = Brass ? Insulation Diameter (mm [in]) = 6.60 [.260] Max. ? Insulation Support = Non -Insulation Support ? Industry Application = Standard ? Finish = Tin ? Dimple Type = Dimple with wire stop Body Related Features: ? Wire Range (mm [AWG]) = 1.25 -2.00 ² [16-14] ? Fully Insulated = Yes ? Flammability Rating = UL 94V -2	Industry Standards: ? RoHS/ELV Compliance = RoHS compliant, ELV compliant ? Lead Free Solder Processes = Not relevant for lead free process ? RoHS/ELV Compliance History = Always was RoHS compliant Packaging Related Features: ? Packaging Method = Strip Other: ? Brand = AMP