



Products

Industries

Resources

About TE

My Account


Innovation

Support Center

Home > Products > Modular Jacks & Plugs > Product Feature Selector > Product Details

6116317-5 Product Details

Share Print Email

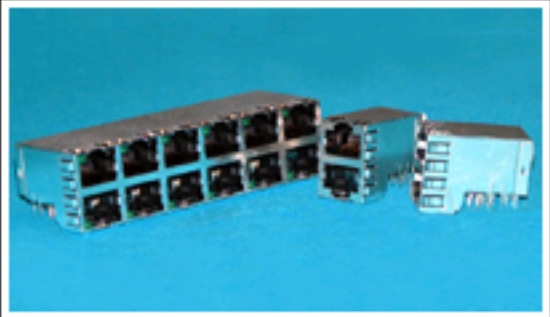

6116317-5

TE Internal Number: 6116317-5

Active

View 3D PDF

PCB Mounted Jacks - Single Port, Multi-port and Stacked

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Connector
- Preloaded
- Stacked Port Configuration
- 2 x 8 Jack Configuration
- Jack Type = RJ45

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [STACKED MODULAR JACK ASSEMBLY, 2X8 WITH LEDS, 8 POSI...](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- [High Performance Modular Plugs & Jacks, PCB Mounted](#) (PDF, English)

Application Specifications:

- [Modular Jacks](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- [2D Drawing](#) (DXF, Version B)
- [3D Model](#) (IGES, Version B)
- [3D Model](#) (STEP, Version B)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Connector
- Jack Type = RJ45
- PCB Mounting Orientation = Side Entry (Right Angle)
- PCB Mount Style = Through Hole
- Termination Method to PC Board = Through Hole - Press Fit
- Performance Category = Cat 5e
- LED = With
- Grounding Options = Panel Ground and PCB Ground
- Panel Stops = Without
- Keyed = No
- Profile = Very Low; Offset - Over Hangs PCB
- Color = Black
- Shield Material = .010 [0.25] Copper Alloy

Mechanical Attachment:

- Panel Mount Retention = Without

Electrical Characteristics:

- Shielded = Yes

Termination Features:

- Solder Tail Contact Plating = Tin over Nickel
- Grounding Clips = Without

Dimensions:

- PCB Tail Length (mm [in]) = 4.35 [0.171]
- PCB Thickness, Recommended (mm [in]) = 1.57 [0.062]

Body Features:

- Inverted Jack Face = No
- Shield Plating = Tin over Copper
- Grounding Tab Plating = Tin over Copper

Contact Features:

- Contact Plating, Mating Area, Material = Gold (50)
- Contact Base Material = Phosphor Bronze
- PCB ACTION PIN Grounds = With

Housing Features:

- Housing Material = PBT - GF
- Housing Color = Black
- UL Flammability Rating = UL 94V-0

Configuration Features:

- Preloaded = Yes
- Port Configuration = Stacked
- Jack Configuration = 2 x 8
- Number of Positions = 8
- Number of Contacts Loaded = 8
- Number of PCB Ground Tabs = 11
- Number of Terminals Per Port = 8

Industry Standards:

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Identification Marking:

- LED Color; Top Left = Green/Yellow
- LED Color; Top Right = Green/Yellow
- LED Color; Bottom Left = Green/Yellow
- LED Color; Bottom Right = Green/Yellow

Product Availability:

- Region = Asia, North America

Other:

- Brand = AMP
- Comment = With 4 PCB ACTION PIN Grounds.

Corporate Information

[About TE](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)
[Terms & Conditions](#)
[Privacy Policy](#)

Quick Links

[Distributor Inventory](#)
[Product Cross Reference](#)
[Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Knowledge Base](#)
[Manage Your Account](#)

Keep Me Informed

