

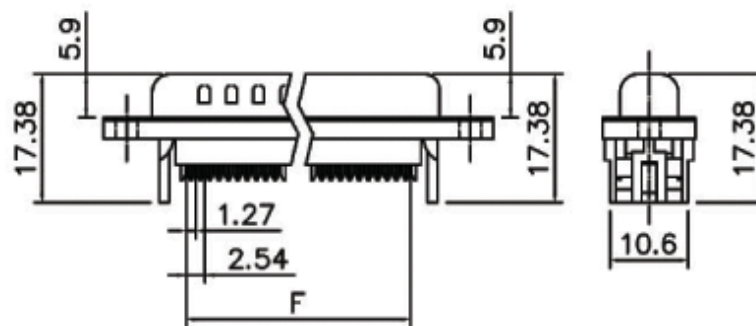
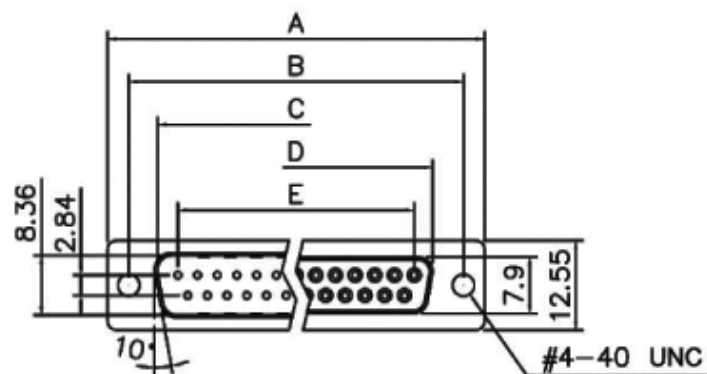


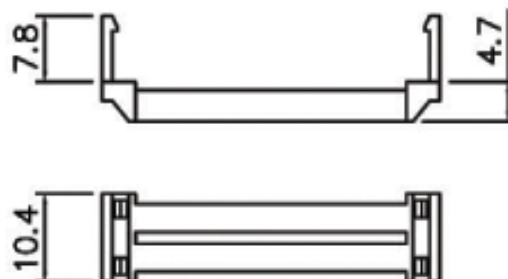

With Insulator Support

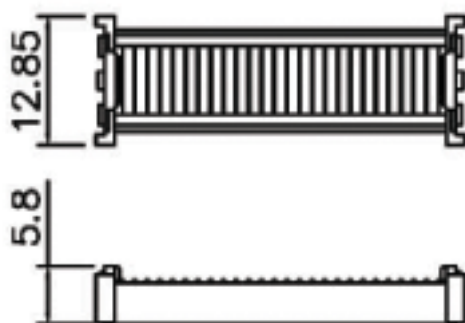

Strain Relief

A-DXFXLPIIZ-UNC-R

1. S - MALE
F - FEMALE
2. No of contacts
09/15/25/37

Positions	A	B	C	D	E	F
9	30.81	24.99	16.92	16.33	11.08	10.16
15	39.14	33.32	25.50	24.66	19.39	17.78
25	53.04	47.04	38.96	38.38	33.24	30.48
37	69.32	63.50	55.42	54.84	49.86	45.72

Scale	1:1							Name
TOLERANCE						Drawn	11.22.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

RoHS Complaint

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-DxFxxLPIII/Z-UNC-R

Title	D-Sub connectors for flat ribbon cable, Low profile version with UNC thread
--------------	--

Drawing No.

rev00

Replace

Sheet
