

A

B

C



D

E

F

G

H

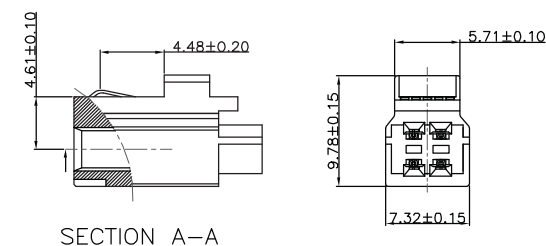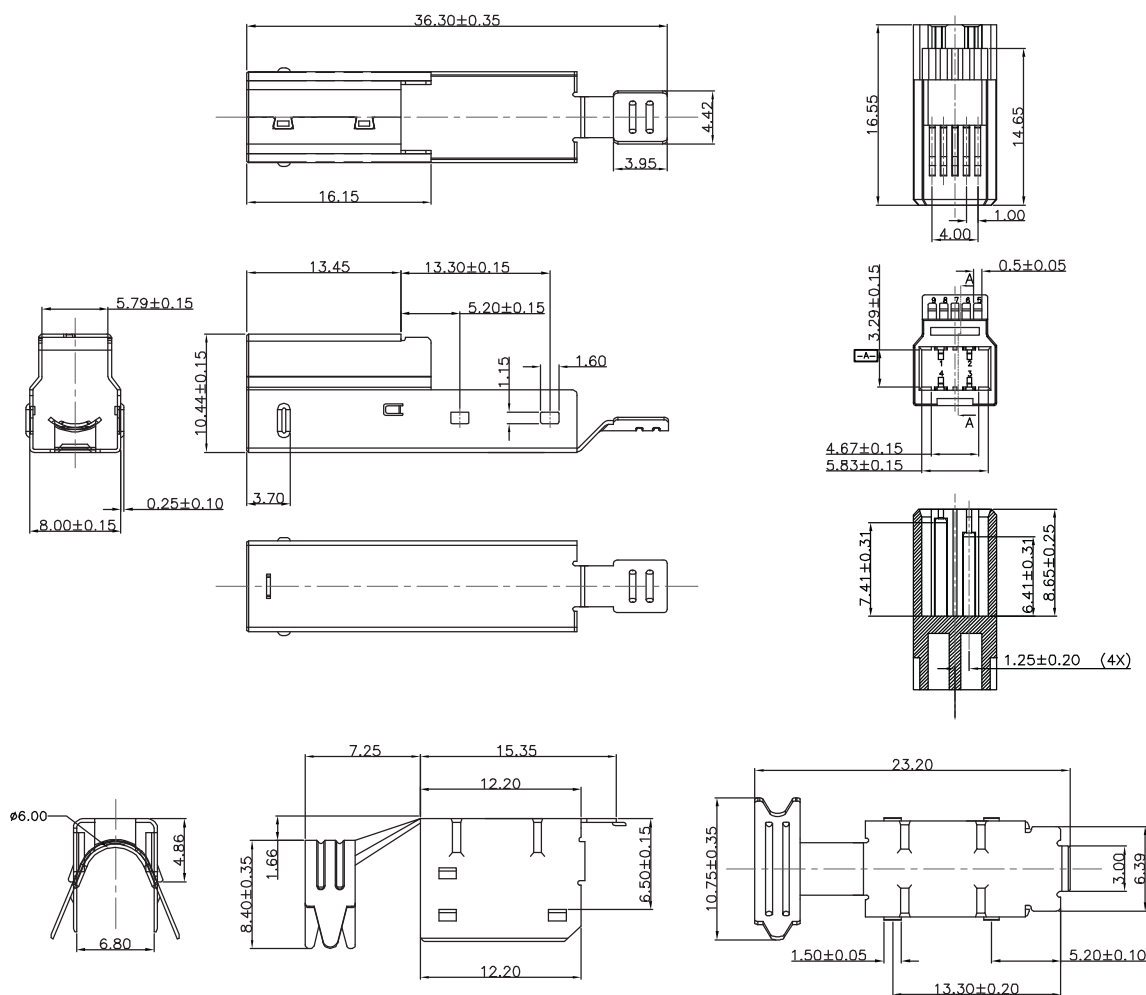

Material:

- Housing: PBT, UL94V-0
- Shell: SPCC.T=0.30MM
- Contact: C2680 T=0.20MM 4Pcs
C5210 T=0.25MM 5Pcs

Electrical:

- Dielectric withstanding voltage: 100V AC (RMS)
- Contact Resistance:
 - 30M Ω Max for Pin1 & Pin4
 - 50M Ω Max for other contacts

Mechanical:

- Insertion Force: 35 Newtons Maximum
- Extraction Force: 10 Newtons Minimum

Unit: MM±0.20MM

[illegible]

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-USBPB-3-R

	Title
--	-------

USB 3.0 Assembly Type - B connector type

Drawing No.

rev00

Replace

Sheet

