


ATM0350D18 OPTIONS		
TOUCH PANEL	4-WIRE RESISTIVE	<input type="radio"/>
	PROJECTED CAPACITIVE	<input type="radio"/>
INTERFACE	RGB(DEFAULT)	<input checked="" type="radio"/>
	LVDS INTERFACE	<input type="radio"/>
	MCU INTERFACE	<input type="radio"/>

ITEM	PARAMETERS	ITEM	PARAMETERS
AA SIZE(DIAGONAL)	3,5 Inch	OPERATING TEMP	-20° C TO 70° C
RESOLUTION	320xRGBx240	STORAGE TEMP	-30° C TO 80° C
OPERATING VOLTAGE	3.3V	BL CURRENT	20 mA(Typ.)
VIEWING ANGLE	HORIZONTAL:150° , VERTICAL:115°	LUMINANCE	400 cd/m2 (Typ. WITHOUT TP)
CONTRAST RATIO	450:1	ROHS STANDARD	YES
SURFACE TREATMENT	CLEAR	OTHER	



50	VSS	25	G1
49	VSS	24	G2
48	NC	23	G3
47	SHUT	22	G4
46	NC	21	G5
45	NC	20	G6
44	NC	19	G7
43	NC	18	B0
42	VCC	17	B1
41	VCC	16	B2
40	VDD	15	B3
39	VDD	14	B4
38	ENB	13	B5
37	VSYN	12	B6
36	HSYN	11	B7
35	DCLK	10	SDO
34	R0	9	SDI
33	R1	8	SCK
32	R2	7	CSB
31	R3	6	/RESET
30	R4	5	NC
29	R5	4	LED+
28	R6	3	LED+
27	R7	2	LED-
26	G0	1	LED-
PIN	Symbol	PIN	Symbol

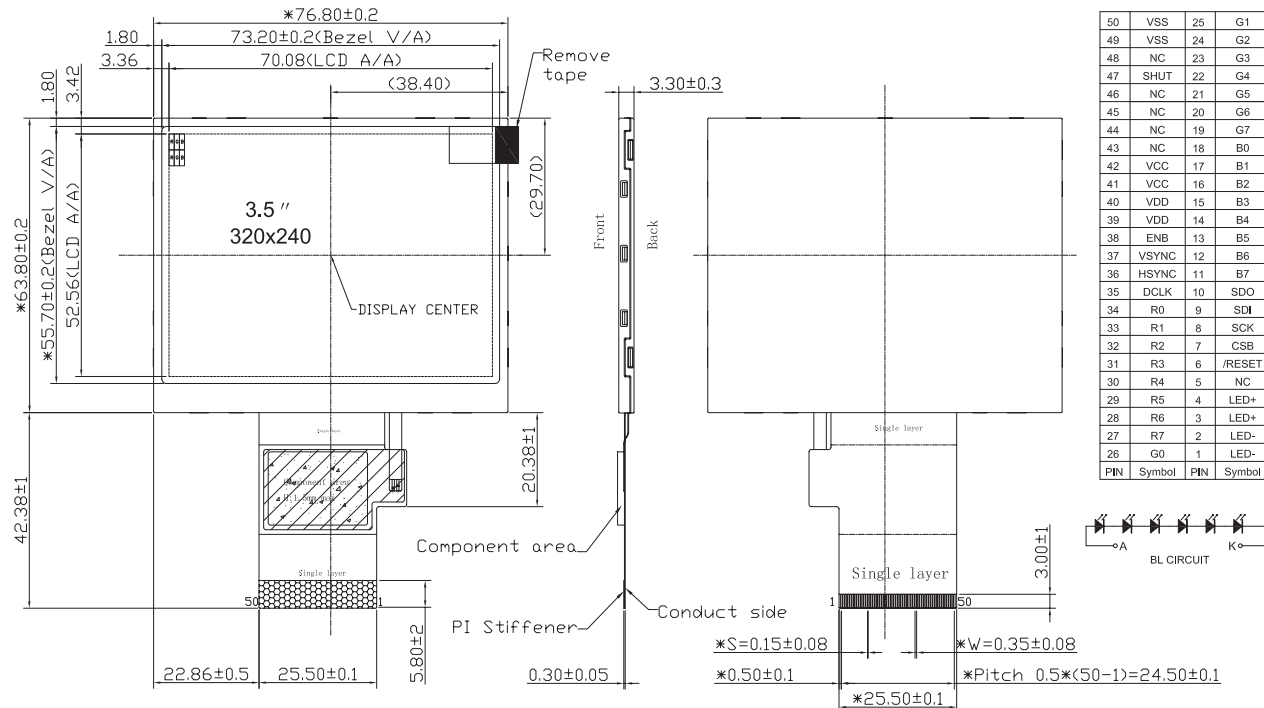