

[Labels](#) / [Labels by Portable Printer](#) / [TLS PC Link Labels](#) /

BMP61 BMP71 TLS 2200 Self-Laminating Vinyl Wire and Cable Labels

BMP61 BMP71 TLS 2200 Self-Laminating Vinyl Wire and Cable Labels



Product Highlights:

Label/Tape Size:

1.5 in H x 0.25 in W

Material:

Vinyl

For Use with Printer:

BMP®61 Labeling System, BMP®71 Label Printer, TLS 2200® Thermal Labeling System, TLS-PC LINK™ Thermal Labeling System

Color:

Clear/White

Material Number:

B-427

Part Number:

PTL-28-427

ADD TO CART

1



Add To Favorites

PEOPLE ALSO VIEWED

OVERVIEW

Self-Laminating Vinyl (B-427) is an excellent material for wire and cable identification. This material has good clarity, conformability and is self-extinguishing.

- Provided in a self-laminated format with a white printable zone and translucent overlaminating area to protect text
- Durable, permanent acrylic adhesive has outstanding water and oil resistance
- RoHS compliant to 2005/618/EC MCV amendment to RoHS Directive 2002/95/EC; UL approved
- Service temperature of -40°F to 158°F (-40°C to 70°C)

SPECIFICATIONS

Material Number	B-427
Catalog Page #	336
Dimensions	1.5 in H x 0.25 in W
UOM	Roll of 750 Labels
Finish	Matte
Indoor or Outdoor Use	Outdoor Use

Label/Tape Size	1.5 in H x 0.25 in W
Maximum Service Temperature °F	140 °F
Maximum Wire Gauge	4 gauge
Minimum Service Temperature °F	-40 °F
Minimum Wire Gauge	10 gauge
National Stock Number (NSN)	7690015265428
Overlamine Included	Overlamine Included
Pre-Printed Areas on Label	Colored Write-On Area
Printable Area Dimensions	0.5 in H x 0.25 in W
Printable Area Height	0.5 in
Printable Area Width	0.25 in
Product Number	18406
UPC	662820184065
Quantity per Roll	750
Quantity per Row	1
Secondary Label Included	Secondary Label is Not Included
Thickness	0.004 in
Trade Name	BMP®61 BMP®71 TLS 2200® TLS-PC Link™
Unit Price	/Label
Adhesive Type	Acrylic
Applications	Cable & Wire Marking, Panel Labeling
Color	Clear/White
For Use with Printer	BMP®61 Labeling System, BMP®71 Label Printer, TLS 2200® Thermal Labeling System, TLS-PC LINK™ Thermal Labeling System
Header	No Header
Label/Media Format	Roll
Label Properties	Self Laminating Labels & Wraps
Language	No Text
Material	Vinyl
Material Properties	Flame-retardant, Self-Laminating
Print Technology	Thermal Transfer
Resistance Properties	Chemical-Resistant, Humidity-Resistant, Oil-Resistant, Water-Resistant, Weather-Resistant
Shape	Rectangle
Suggested Ribbon Series	R4300, R6200

Solutions

Floor Marking Guide
GHS Label Compliance
Lockout Tagout Compliance
Arc Flash Labeling Requirements
Cable and Wire Label Options
Product and Barcode Labeling
Brand Protection Solutions

Services

Lockout Tagout Services
Arc Flash Services
Confined Space Services
Software Programming & Integration
Label Template & File Conversion
Printer Use & Training
Printer Preventative Maintenance
Toll and Custom Coating
Authentication & Tracking Services

Help

Contact Us
Website Feedback
Knowledge Center
Printer Drivers & Firmware
Brady Software Updates
Safety Data Sheets
Technical Data Sheets
WEEE-RoHS Compliance
Product Certification
Printer Registration

Resources

Find a Distributor
Design Custom Safety Signs
Printer Selection Tool
Label Selection Tool
Digital Catalog
Request a Catalog
Interactive Facility Map
EPA e-Manifest Update

Corporate

[About](#)

[Careers](#)

[Investors](#)

[Privacy Policy](#)

[Terms and Conditions](#)

[Terms of Use](#)

[ISO](#)

[Certificates Protection Solutions](#)

Other BradyContact Sites

[Distributor](#)

[Portal](#)

[International Sites](#)

[Safety](#)

[Services &](#)

[Software](#)


[Smart ID](#)

[Brand](#)

[Protection Solutions](#)

6555 W. Good Hope Rd.
Milwaukee, WI 53223
Phone: 888-250-3082
Hours: 7am-6pm CT
Monday - Thursday;
Friday 7am-5pm CT

Brady (NYSE:BRC) is a manufacturer of complete solutions that identify and protect people, products and places. Brady's products help customers increase safety, security, productivity and performance and include high-performance labels, signs, safety devices, printing systems and software.

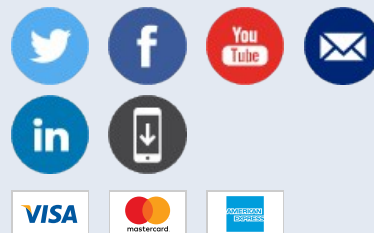

2018 © Brady Worldwide, Inc.