


[Printer Labels](#) / [Bradyprinter PR Plus Printer Labels](#) /

3" Core Series WorkHorse Glossy Polyester Labels



## 3" Core Series WorkHorse Glossy Polyester Labels

**Part Number:**

THT-76-423-1-YL

**Label/Tape Size:**

3 in H x 4 in W

**Material:**

Polyester

**For Use with Printer:**

BBP®81 Label Printer, BRADY IP® Series  
Label Printer, BradyPrinter i5100,  
BradyPrinter i7100, BRADYPRINTER PR  
Plus Series Label Printer

**Material Number:**

B-423Y

**Color:**

Yellow

**Quantity per Roll:**

1000

ADD TO CART

1



Add To Favorites

PEOPLE ALSO VIEWED

OVERVIEW

Permanent Polyester (B-423) is ideal for electronic PCB and component identification, bar code labels, rating plates and solar panel identification.

- Glossy yellow finish with permanent acrylic is thermal transfer printable
- RoHS compliant to 2005/618/EC MCV amendment to RoHS Directive 2002/95/EC; UL approved; CSA accepted
- Meets requirements of a halogen-free material per DIN VDE 0472 part 815
- Service temperature of -94 to 230° F (-70 to 110° C)

SPECIFICATIONS

|                 |                 |
|-----------------|-----------------|
| Material Number | B-423Y          |
| Dimensions      | 3 in H x 4 in W |
|                 |                 |

|                                |                                                                                                                                         |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| UOM                            | Roll                                                                                                                                    |
| Finish                         | Gloss                                                                                                                                   |
| Label/Tape Size                | 3 in H x 4 in W                                                                                                                         |
| Maximum Service Temperature °F | 230 °F                                                                                                                                  |
| Minimum Service Temperature °F | -94 °F                                                                                                                                  |
| Product Number                 | 132418                                                                                                                                  |
| UPC                            | 754473845018                                                                                                                            |
| Quantity per Roll              | 1000                                                                                                                                    |
| Quantity per Row               | 1                                                                                                                                       |
| Thickness                      | 0.0034 in                                                                                                                               |
| Adhesive Type                  | Acrylic                                                                                                                                 |
| Applications                   | Asset Tracking, Barcode Labeling, Circuit Board ID - Through Hole Top, Component & Equipment ID, General & Industrial ID, Rating Plates |
| Color                          | Yellow                                                                                                                                  |
| For Use with Printer           | BBP®81 Label Printer, BRADY IP® Series Label Printer, BradyPrinter i5100, BradyPrinter i7100, BRADYPRINTER PR Plus Series Label Printer |
| Label/Media Format             | Roll                                                                                                                                    |
| Label Properties               | Aggressive Adhesive Labels, Harsh Environment Labels, Heat Resistant Labels, Permanent Adhesive Labels                                  |
| Material                       | Polyester                                                                                                                               |
| Print Technology               | Thermal Transfer                                                                                                                        |
| Shape                          | Rectangle                                                                                                                               |
| Suggested Ribbon Series        | R4900, R6000, R6200                                                                                                                     |

## Solutions

[Floor Marking Guide](#)  
[GHS Label Compliance](#)  
[Lockout Tagout Compliance](#)  
[Arc Flash Labeling Requirements](#)  
[Cable and Wire Label Options](#)  
[Product and Barcode Labeling](#)  
[Brand Protection Solutions](#)

## Services

[Lockout Tagout Services](#)  
[Arc Flash Services](#)  
[Confined Space Services](#)  
[Visual Workplace Services](#)  
[Hazcom GHS Services](#)  
[Software Programming & Integration](#)  
[Label Template & File Conversion](#)  
[Printer Use & Training](#)  
[Printer Preventative Maintenance](#)  
[Toll and Custom Coating](#)  
[Authentication & Tracking Services](#)

## Help

[Contact Us](#)  
[Knowledge Center](#)  
[Printer Drivers & Firmware](#)  
[Brady Software Updates](#)  
[Safety Data Sheets](#)  
[Technical Data Sheets](#)  
[WEEE-RoHS Compliance](#)  
[Product Certification](#)  
[Printer Registration](#)

## Resources

[Find a Distributor](#)  
[Design Custom Safety Signs](#)  
[Printer Selection Tool](#)  
[Label Selection Tool](#)  
[Digital Catalog](#)  
[Request a Catalog](#)  
[Interactive Facility Map](#)  
[EPA e-Manifest Update](#)

Corporate

Other Brady

Contact

About

Careers

Investors

Privacy

Policy

Terms and

Conditions

Terms of

Use

ISO

Certificates

Sites

Distributor

Portal

International

Sites

Safety

Services &

Software

Smart ID

Brand

Protection

Solutions

6555 W.

Good Hope

Rd.

Milwaukee,

WI 53223

Phone: 888-

250-3082

Hours: 7am-

6pm CT


Monday -

Thursday;

Friday 7am-

5pm CT

Brady (NYSE:BRC) is a manufacturer of complete solutions that identify and protect people, products and places. Brady's products help customers increase safety, security, productivity and performance and include high-performance labels, signs, safety devices, printing systems and software.

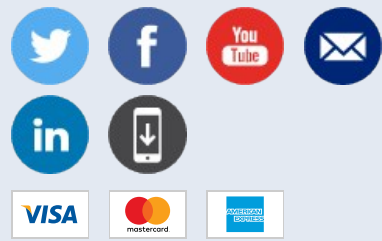

2018 © Brady Worldwide, Inc.