

[Printer Labels](#) / [Bradyprinter PR Plus Printer Labels](#) /

3" Core Series PermaSleeve Polyolefin Wire Marking Sleeves

3" Core Series PermaSleeve Polyolefin Wire Marking Sleeves





Product Highlights:

Material:

Polyolefin

For Use with Printer:

BBP®72 Label Printer, BRADY IP®
Series Label Printer, BradyPrinter i5100,
BradyPrinter i7100, BRADYPRINTER
PR Plus Series Label Printer, THT 3"
Core Printer

Material Number:

B-342

Color:

White

Quantity per Roll:

2000

Part Number:

PS-094-2-WT-S-4


ADD TO CART

1



Add To Favorites

People Also
Viewed



Overview

PermaSleeve® PS Heat-Shrink Polyolefin (B-342) wire marking sleeves combine speed, ease of use, and permanence to create long-lasting, high quality identification.

- 3:1 heat shrinkable sleeve fit snugly around wires for maximum insulation protection and permanent identification
- Fade-resistant and smudge-proof for superior aesthetic appearance
- Cold resistant and flame-retardant with an operating temperature of -67°F to 275°F (-55°C to 135°C)
- Meets SAE-AMS-DTL-23053/5C (Class 1), SAE-AS-81531, MIL-STD-202; RoHS Compliant; and UL Recognized

Specifications

Material Number	B-342
Calculated Country Of Origin	US - All trade information (i.e. Country of Origin, Harmonized Schedule code, and/or Export Control Classification Number) and related assistance provided by Brady Corporation and its affiliates is provided for informational purposes only and is subject to change without notice. Any use of such information by you is without recourse to Brady Corporation or its affiliates and is at your own risk. This information is not provided as legal advice or as a substitute for obtaining specific legal advice. If you have any questions regarding your specific situation, you should consult your attorney.
California Prop 65	WARNING: Cancer - www.p65warnings.ca.gov
Catalog Page #	198

Diameter as Supplied	0.094 in
Dimensions	0.182 in H
UOM	Roll of 2000 Each
Finish	Matte
Maximum Service Temperature °F	275 °F
Maximum Wire Diameter	0.08 in
Maximum Wire Gauge	20 AWG
Minimum Service Temperature °F	-67 °F
Minimum Wire Diameter	0.023 in
Minimum Wire Gauge	28 AWG
Printable Sides	Single-Side Printable
Product Number	114284
UPC	662820921912
Quantity per Roll	2000
Quantity per Row	4
Recovered Diameter	0.023 in
Roll Width	2 in
Shrink Ratio	3:1
Sleeve Size	0.094 in Dia x 0.5 in W
Sleeve Size(m)	2.4 mm Dia x 12.7 mm W
Sleeve Slits	Yes
Sleeve Width	0.5 in
Trade Name	PermaSleeve®
Unit Price	/Sleeve
Applications	Cable & Wire Marking
Color	White
For Use with Printer	BBP®72 Label Printer, BRADY IP® Series Label Printer, BradyPrinter i5100, BradyPrinter i7100, BRADYPRINTER PR Plus Series Label Printer, THT 3" Core Printer
Label/Media Format	Roll
Label Properties	Heat Shrink Sleeves
Material	Polyolefin
Material Properties	Flame-retardant, Heat-Shrinkable

Printer and Label Applications	Wire & Cable
Print Technology	Thermal Transfer
Resistance Properties	Chemical-Resistant, Corrosion-Resistant, Humidity-Resistant, Smear-Resistant, UV-Resistant, Weather-Resistant
Suggested Ribbon Series	R2000, R4300, R4502S, R5000, R6600, R6700

Solutions

[Floor Marking Guide](#)
[GHS Label Compliance](#)
[Lockout Tagout Compliance](#)
[Arc Flash Labeling Requirements](#)
[Cable and Wire Label Options](#)
[Product and Barcode Labeling](#)

Services

[Lockout Tagout Services](#)
[Arc Flash Services](#)
[Confined Space Services](#)
[Software Programming & Integration](#)
[Label Template & File Conversion](#)
[Printer Use & Training](#)
[Printer Preventative Maintenance](#)
[Toll and Custom Coating](#)
[Authentication & Tracking Services](#)

Help

[Contact Us](#)
[Website Feedback](#)
[Knowledge Center](#)
[Printer Drivers & Firmware](#)
[Brady Software Updates](#)
[Safety Data Sheets](#)
[Technical Data Sheets](#)
[WEEE-RoHS Compliance](#)
[Product Certification](#)
[Printer Registration](#)

Resources

[Find a Distributor](#)
[Design Custom Safety Signs](#)
[Create Custom THT Labels](#)
[Printer Selection Tool](#)
[Label Selection Tool](#)
[Digital Catalog](#)
[Request a Catalog](#)
[Interactive Facility Map](#)
[EPA e-Manifest Update](#)

Corporate


[About](#)
[Careers](#)
[Investors](#)
[Privacy Policy](#)
[Terms and Conditions](#)
[Terms of Use](#)
[ISO Certificates](#)

Other BradyContact Sites

[Distributor Portal](#)
[International Sites](#)
[Safety Services & Software](#)
[Brand Protection Solutions](#)

6555 W. Good Hope Rd.
 Milwaukee, WI 53223
 Phone: 888-250-3082
 Hours: 7am-6pm CT
 Monday - Thursday;
 Friday 7am-5pm CT

Brady (NYSE:BRC) is a manufacturer of complete solutions that identify and protect people, products and places. Brady's products help customers increase safety, security, productivity and performance and include high-performance labels, signs, safety devices, printing systems and software.

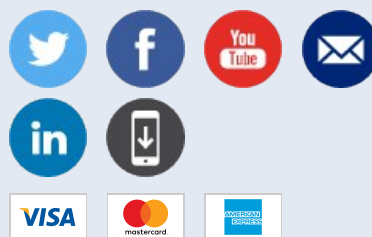

2018 © Brady Worldwide, Inc.