


[Labels](#) / [Printer Labels and Ribbons](#) / [Portable Printer Labels](#) / [TLS PC Link Thermal Transfer Printer Labels](#) /

BMP61 BMP71 TLS 2200 PermaSleeve Polyolefin Wire Marking Sleeves



BMP61 BMP71 TLS 2200 PermaSleeve Polyolefin Wire Marking Sleeves

Part Number:

PSPT-1000-1-YL

Material:

Polyolefin

For Use with Printer:

BMP®61 Labeling System, BMP®71 Label
Printer, TLS 2200® Thermal Labeling
System, TLS-PC LINK™ Thermal Labeling
System

Color:

Yellow

Material Number:

B-342

[ADD TO CART](#)

1

[Add To Favorites](#)

OVERVIEW

PermaSleeve® PS Heat-Shrink Polyolefin (B-342) wire marking sleeves combine speed, ease of use, and permanence to create long-lasting, high quality identification.

- 3:1 heat shrinkable sleeve fit snugly around wires for maximum insulation protection and permanent identification
- Fade-resistant and smudge-proof for superior aesthetic appearance
- Cold resistant and flame-retardant with an operating temperature of -67°F to 275°F (-55°C to 135°C)
- Meets SAE-AMS-DTL-23053/5C (Class 1), SAE-AS-81531, MIL-STD-202; RoHS Compliant; and UL Recognized

SPECIFICATIONS

Material Number	B-342
Diameter as Supplied	1 in
Dimensions	1.667 in H x 1.1677 in W
UOM	Roll
Finish	Matte
Maximum Service Temperature °F	275 °F
Maximum Wire Diameter	0.95 in
Maximum Wire Gauge	1 AWG
Minimum Service Temperature °F	-67 °F
Minimum Wire Diameter	0.375 in
Minimum Wire Gauge	500 AWG
Printable Sides	Single-Side Printable
Product Number	18486
UPC	662820184867
Quantity per Roll	50
Quantity per Row	1
Recovered Diameter	0.375 in
Roll Width	1 in
Shrink Ratio	3:1
Sleeve Size	1 in Dia x 1 in W
Sleeve Size(m)	25.4 mm Dia x 25.4 mm W
Sleeve Width	1 in
Applications	Cable & Wire Marking, Panel Labeling
Color	Yellow
For Use with Printer	BMP®61 Labeling System, BMP®71 Label Printer, TLS 2200® Thermal Labeling System, TLS-PC LINK™ Thermal Labeling System
Label/Media Format	Roll
Material	Polyolefin
Material Properties	Flame-retardant, Heat-Shrinkable
Print Technology	Thermal Transfer
Resistance Properties	Chemical-Resistant, Corrosion-Resistant, Humidity-Resistant, Smear-Resistant, UV-Resistant, Weather-Resistant
Suggested Ribbon Series	R4300, R4502S, R5000, R6600, R6700



Solutions

Floor Marking Guide
GHS Label Compliance
Lockout Tagout Compliance
Arc Flash Labeling Requirements
Cable and Wire Label Options
Product and Barcode Labeling
Brand Protection Solutions

Services

Lockout Tagout Services
Arc Flash Services
Confined Space Services
Visual Workplace Services
Hazcom GHS Services
Software Programming & Integration
Label Template & File Conversion
Printer Use & Training
Printer Preventative Maintenance
Toll and Custom Coating
Authentication & Tracking Services

Help

Contact Us
Knowledge Center
Printer Drivers & Firmware
Brady Software Updates
Safety Data Sheets
Technical Data Sheets
WEEE-RoHS Compliance
Product Certification
Printer Registration

Resources

Find a Distributor
Printer Selection Tool
Label Selection Tool
Digital Catalog
Request a Catalog
Interactive Facility Map

Corporate

About
Careers
Investors
Privacy Policy
Terms and Conditions
Terms of Use
ISO Certification

Brady Sites

Distributor Portal
International Sites
Safety Services
Software Smart ID and Protection Solutions


Resources

Press Releases
Request a Catalog
Find a Distributor
Log Out

Contact

6555 W. Good Hope Rd.
Milwaukee, WI 53223
Phone: 888-250-3082
Hours: 7am-6pm CT
Monday - Thursday;
Friday 7am-5pm CT

Brady (NYSE:BRC) is a manufacturer of complete solutions that identify and protect people, products and places. Brady's products help customers increase safety, security, productivity and performance and include high-performance labels, signs, safety devices, printing systems and software.

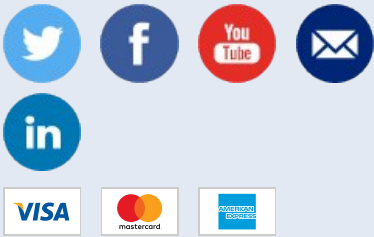

2018 Brady Worldwide, Inc.