

CM Series Relay Sockets

Description 5, 8 and 11 Pin Square Base Sockets

Electrical Rating

- 300 Volts, 10 Amps
- 150 Volts, 15 Amps

Construction

Contacts • Brass, Bright Tin Plated

Molding • Break Resistant Thermoplastic

Black Standard, White Available

Agency Approvals

- UL recognized, File No. E60008
- CSA certified, File No. LR29513
- CE
- ROHS



CM Series Ordering Code

Part #	Description	Terminal Type
CM05-SLD	SPDT, 5 Pin Square (Fig. 2)	Solder
CM05-QDC	SPDT, 5 Pin Square (Fig. 1)	Quick Disconnect
CM08-SLD	DPDT, 8 Pin Square (Fig. 2)	Solder
CM08-QDC	DPDT, 8 Pin Square (Fig. 1)	Quick Disconnect
CM11-SLD	3PDT, 11 Pin Square (Fig. 2)	Solder
CM11-QDC	3PDT, 11 Pin Square (Fig. 1)	Quick Disconnect

Accessories

Part #	Description
	(Refer to the accessories pages 24-31)
HDB-5	Hold Down Spring

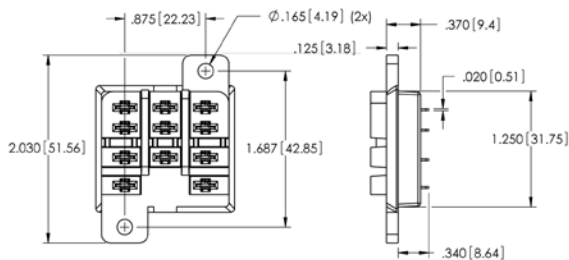


Figure 1


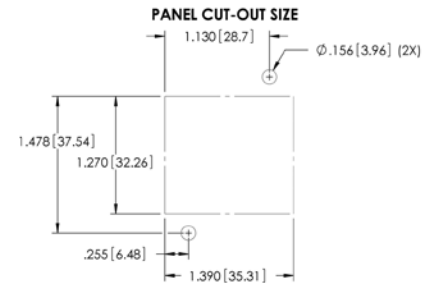


Figure 2

