
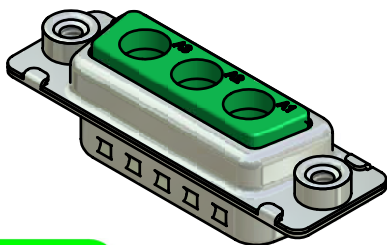

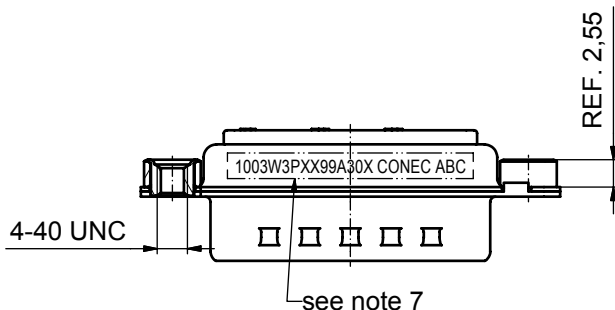
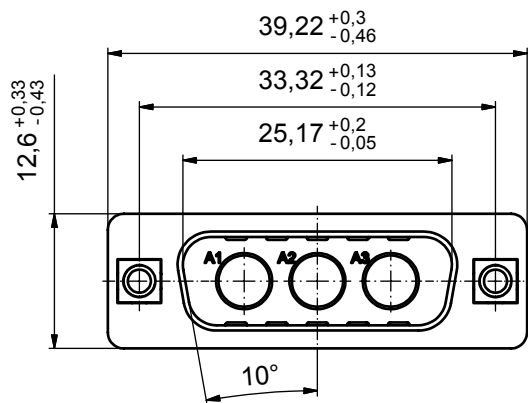


P.C.B. HOLE DRILLINGS

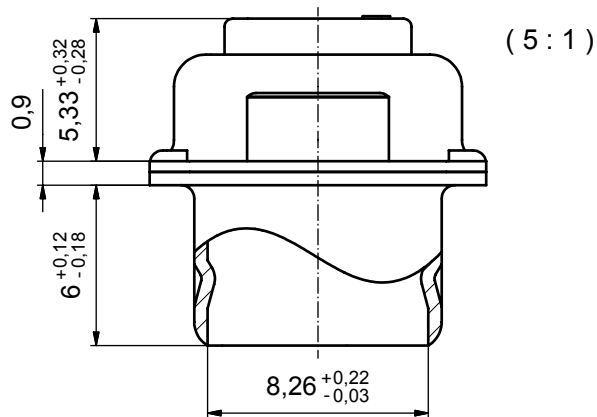

Directive 2002/95/EC
„RoHS”
Compliant

NOTES:

1. METALSHELLS: COPPER ALLOY; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0; GREEN
3. NO CONTACTS ON POS A1-A3
4. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
5. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: 1003W3PXX99A30X CONEC ABC

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance			dim. in mm
rev.	description	date	name				
a	Origin						
				drawn	18.11.08	Schmidt	
				appd.	18.11.08	Mickenbecker	
				norm			
				d-old			

CONEC

scale: 2:1 (5:1)	
material: see notes	
title: D-SUB COMBINATION MALE 3W3P with threaded insert	
dwg no: Inventor 10	DIN-A3
13K1A2684	
sh: 1	
part no: 1003W3PXX99A30X	