


HFW1131L01P Product Details

SharePrintEmail

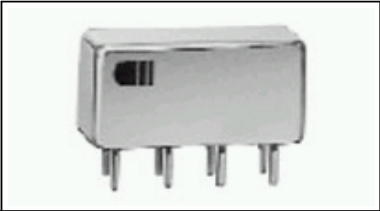

HFW1131L01P
(4 - 1617029 - 1)

TE Internal Number: 4 - 1617029 - 1

Active

Military/Aerospace High Performance Relays

[Not EU RoHS or ELV Compliant](#)

Product Highlights:

- ?

HFW Half - Size Relay Series
- ?

Input Voltage = 5 VDC
- ?

Contact Arrangement = 2 Form C, DPDT, 2 C/O
- ?

Contact - Rated Current = 2 A
- ?

Non Polarized, Monostable Coil - Magnetic System

[View all Features](#)

Quick Links

- ?

[Check Pricing & Availability](#)
- ?

[Search for Tooling](#)
- ?

[Product Feature Selector](#)
- ?

[Contact Us About This Product](#)

[Add to My Part List](#)

[Request Sample](#)

[Find Similar Products](#)

[Buy Product](#)

Documentation & Additional Information	
Product Drawings: ? None Available Catalog Pages/Data Sheets: ? RELAY (PDF, English) Product Specifications: ? None Available Application Specifications: ? None Available Instruction Sheets: ? None Available CAD Files: ? None Available	Additional Information: ? Product Line Information Related Products: ? Tooling
List all Documents	

Product Features (Please use the Product Drawing for all design activity)	
Product Type Features: ? Series = HFW Half - Size Relay ? Termination Type = Solder Hook Terminals Electrical Characteristics: ? Input Voltage (VDC) = 5 ? Contact - Rated Current (A) = 2 ? Coil Polarity Protection Diode = Without ? Transistor Driver = Without ? Coil Resistance (?) = 27 ? MOSFET Driver = Without ? Coil Power Measurement = Milliwatts ? Coil - Rated Power (mW) = 926 ? Actuating System = DC ? Shock = 100G's, 6ms ? Vibration = 30G's, 10 to 3000Hz Contact Features: ? Mounting Options = Panel Mount ? Enclosure Type = Hermetically Sealed	Configuration Features: ? Contact Arrangement = 2 Form C, DPDT, 2 C/O ? Coil - Magnetic System = Non Polarized, Monostable ? Coil Suppression Diode = Without Industry Standards: ? Government/Industry Qualification = Yes ? Government/Industry Part Number = M39016/6 -135P ? RoHS/ELV Compliance = Not ELV/RoHS compliant ? Lead Free Solder Processes = Not suitable for lead free processing ? Approved Standards = M39016 Qualified, P Level Conditions for Usage: ? Temperature Range (°C) = -65 - +125 Other: ? Brand = CII

Corporate Information

[Who We Are](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)

Quick Links

[Check Distributor Inventory](#)
[Cross Reference](#)
[Find Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Search Knowledge Base](#)
[Manage your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address

