



TITLE		IN-LINE FUSEHOLDER		DATE	10-13-11	NO.	BK/HHL-R	REV.	B
DWG.	CK.			SUPERSEDES					
JG				SUP. NO.	BK/HHL-R	DATED	7-7-11		
		ST. LOUIS, MO 63178		LETTERS IN CIRCLE INDICATE CHANGE FROM PRECEDING PRINT					
				PAGE 1 OF 2					
				BU-J11315					
				FOR ATM FUSES					

J U	CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF COOPER INDUSTRIES, INC. IT IS NOT FOR PUBLIC DISCLOSURE. POSSESSION OF THE INFORMATION DOES NOT CONVEY ANY RIGHT TO LOAN, SELL, OR DISCLOSE THE INFORMATION. UNAUTHORIZED REPRODUCTION OR USE OF THE INFORMATION IS PROHIBITED. THIS DOCUMENT IS TO BE RETURNED TO COOPER INDUSTRIES, INC. UPON COMPLETION OF THE PURPOSE FOR WHICH IT IS LOANED OR UPON REQUEST.		SCALE 1x	UNLESS OTHERWISE SPECIFIED TOLERANCES TO BE: METRIC $\pm 1.3\text{mm}$ INCHES $\pm .005"$ ANGULAR $\pm 2^\circ$	C/F NO. 84665
	COPYRIGHT Cooper Industries, Inc. This is an unpublished work. The disclosure of this work is limited to select personnel. Further dissemination or disclosure to the public is PROHIBITED. This unpublished work is protected by Federal Copyright law and all rights thereunder are reserved by Cooper Industries, Inc.		INDICATES CRITICAL DIMENSION OR FEATURE 	THIRD ANGLE PROJECTION 	

INCHES (OR U.S. UNITS) IS THE PRIMARY UNIT OF MEASURE
 METRIC(mm)
 [INCHES]

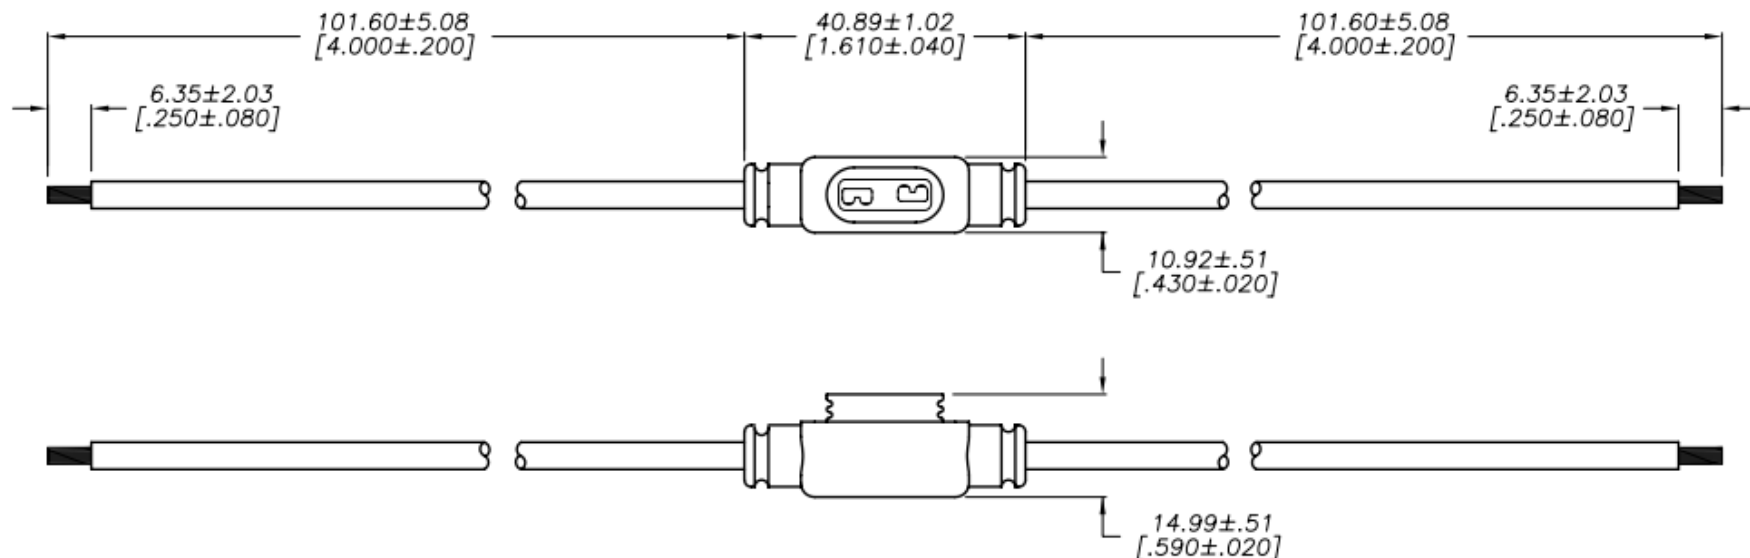

(A)

SPECIFICATIONS:

INSULATION BODY SANTOPRENE TPV 251-70W232, BLACK COLOR, 85 C, V-0

CONTACT MATERIAL BRASS, TIN PLATED.

CURRENT RATINGS 20A FUSE, 16A

FUSE INSERTION MIN. . . . 4.0 kgf [8.8 lbf]

FUSE INSERTION MAX. . . . 9.0 kgf [19.8 lbf]

(B)

WIRE SIZE #16 GAUGE UL3266, RED WIRE, 26 STRAND COPPER (NO PLATING), 125 C XL-PE

PACKAGING 1000 PER BOX.