



## BFB 60 x 60 x 25 MM SERIES

### ■ DIMENSIONS DRAWING

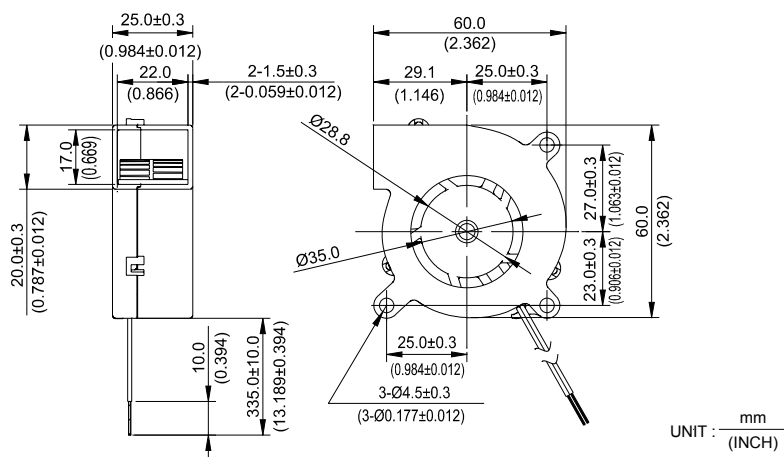

- \* Bearing Type  
Ball Bearings
- \* Material  
Impeller & Frame : Plastic (UL 94V-0)
- \* Lead Wires :  
UL 1430 AWG #26 OR Equivalent  
Red Wire Positive(+)  
Black Wire Negative(-)
- \* Weight : 51.0g (1.80 oz)

### ■ P & Q CURVE (AT RATED VOLTAGE)

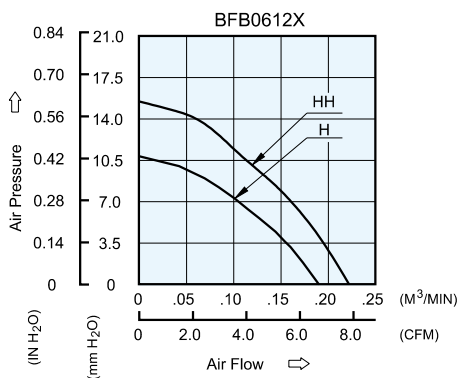

| MODEL     |             | Rated Voltage | Operating Voltage Range | Input Current | Input Power | Speed  | Maximum Air Flow    |      | Maximum Air Pressure |                     | Noise |
|-----------|-------------|---------------|-------------------------|---------------|-------------|--------|---------------------|------|----------------------|---------------------|-------|
| PART NO.  | FUNCTION    | VDC           | VDC                     | Amp           | Watt        | R.P.M. | m <sup>3</sup> /min | CFM  | mmH <sub>2</sub> O   | IN H <sub>2</sub> O | dB-A  |
| BFB0612H  | -R00 / -F00 | 12            | 5.0 to 13.8             | 0.18          | 2.16        | 3200   | 0.190               | 6.71 | 10.86                | 0.428               | 34.0  |
| BFB0612HH | -R00 / -F00 | 12            | 5.0 to 13.8             | 0.24          | 2.88        | 3700   | 0.223               | 7.88 | 15.49                | 0.610               | 39.0  |

- \* Function type is optional.
- \* The max. air flow and the speed are measured in free air ; max. air pressure is measured at zero air flow.
- \* Noise is measured in anechoic chamber in free air, one meter from intake side.
- \* All readings are typical values at rated voltage.
- \* Specifications are subject to change without notice.