


SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-3, 2-4

▲ (ON) = MOMENTARY



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = 0.4
X.XX = 0.25
- TERMINAL NO'S FOR REFERENCE ONLY.

▲ 4. CONTACT RATINGS:

ANSI/UL 1054 AND CAN/CSA C22.2 NO.55(E194579)

16A 125VAC [UR,cUR]

1/2HP 125VAC, 3/4HP 250VAC [UR,cUR]

EN 61058-1: 2002:

16(6)A 250V~ 1E4 T125/55 [ENEC14, SEMKO]

10(4)A 250V~ 5E4 T125/55 [ENEC14, SEMKO]

5. CONTACT RESISTANCE: 35mΩ MAX. INITIAL @ 50VAC

6. INSULATION RESISTANCE: 100MΩ @ 500VDC

7. DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE

8. ELERTICAL LIFE: 6,000 CYCLES [UR,cUR]

10,000 CYCLES [VDE]

50,000 CYCLES [VDE]


9. OPERATING TEMP: -20°C TO 105°C [UR,cUR]

-20°C TO 125°C [VDE]

10. ▲ DENOTE CRITICAL PARAMETER

11. 2002/95/EC (ROHS) COMPLIANT

▲ 12. ILLUMINATION VOLTAGE: 125V

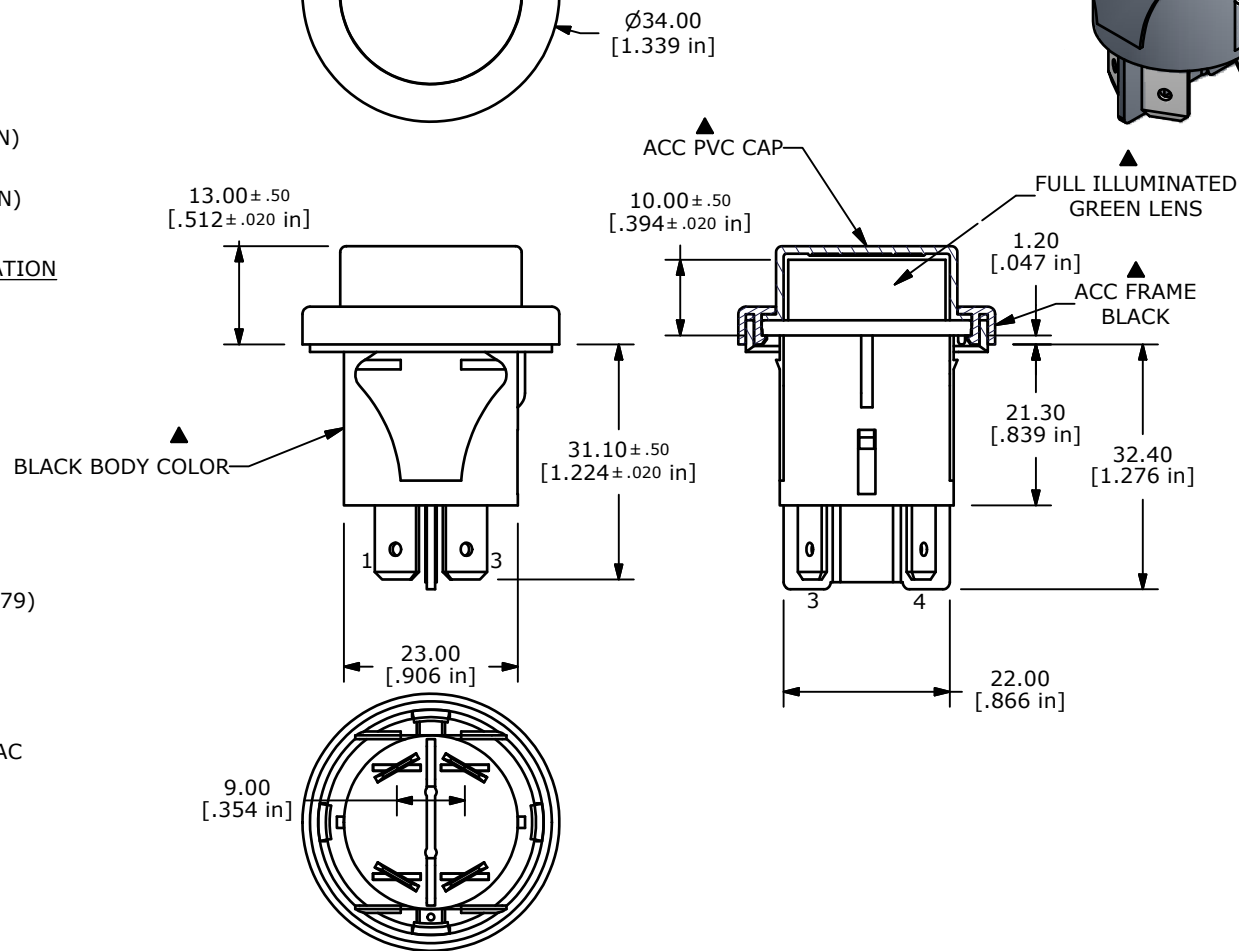

TITLE PR14EC1000-136-ACC-F03-1

SCALE 1:1

DATE 10/25/2011

DR BGL

DWG 38-PR1S00210

REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

B	20297	CORRECT CONTACT CONFIGURATION	11/18/11	BGL
A	20229	RELEASE TO PRODUCTION	10/25/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY