

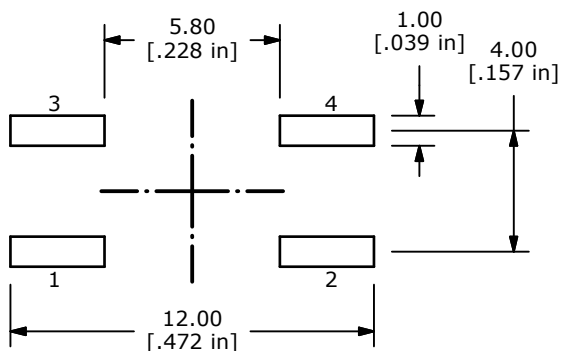

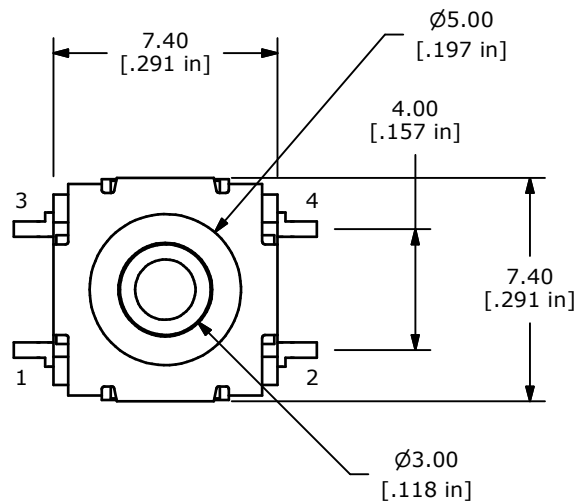


▲ CIRCUIT: SPST

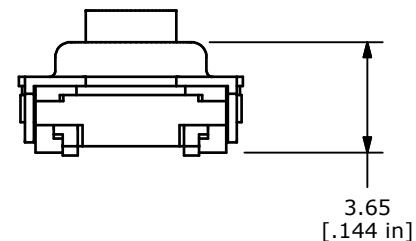

NOTES

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. OPERATING FORCE: 300 ± 50gf
5. OPERATING LIFE: 500,000 CYCLES (B)
6. TRAVEL: 0.5 ± 0.15mm
7. CONTACT RATING: 12VDC @ 50mA
8. CONTACT RESISTANCE: 100m Ω MAX
9. INSULATION RESISTANCE: 100M Ω MIN @ 100VDC.
- ▲ 10. CONTACT MATERIAL: SILVER
11. OPERATING TEMPERATURE: -40°C TO 85°C
12. PACKAGING: TAPE & REEL, 700 PCS. PER REEL
13. ▲ DENOTES CRITICAL PARAMETER
14. 2002/95/EC (ROHS) COMPLIANT
- ▲ 15. ACTUATOR COLOR: CUSTOM BLUE PER PMS 2727C

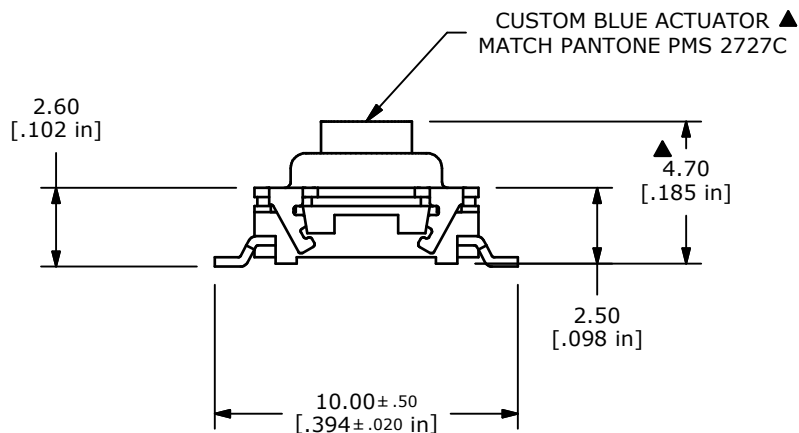

E-SWITCH®

TITLE TL6120AF300QGBLU

SCALE

DATE
6/3/2013DR
EBPDWG
T351522REV
B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	21274	CHANGE LIFE FROM 1,000,000 TO 500,000	10/16/13	EBP
A	21271	INITIAL RELEASE	10/15/13	EBP
REV	PCR NO	DESCRIPTION	DATE	BY