

New

2009 NEW PRODUCTS



www.eclipse tools.com

Crimper

N Connectors LMR600 Coaxial Crimping Tool

OAL: 9"

Feature

- Ratchet action enables single hand use
- Quick release safety latch
- Adjustable crimping pressure
- Ergonomic handle design provides comfortable and non-slip grip
- Repeatable crimp action for consistent, high quality connections

Specification

- Material: Medium Carbon Steel-Hardened
- Frame: Black oxide finished
- Application: LMR-600
- Die size: 0.61"

Description	Part No.
N Connectors LMR600 Coaxial Crimping Tool	CP-231



4-way Indent Crimping Tool

OAL: 6.5"

Feature

- For use on solid barrel type (screw machine) contacts used in RS232 style connectors.
- Ergonomic handle design provides low-effort operation
- Superior pull strength results
- High quality crimping standard ensures repetitive, reliable crimping action
- 4-Way Indent crimper for AWG 12-20 (0.50-4.0 mm2) D-sub contacts
- Adjustable pin height locator



Description	Part No.
4-way Indent Crimping Tool	CP-463



Compression Connector Crimp Tool

OAL: 7.5"



- For F, BNC & RCA compression connectors.
- With adjustment for crimping different length of connectors.
- With ratchet mechanism

Material	Application	HRC	Handle
Medium carbon steel	RG-58, 59, 6(3C, 4C, 5C) "F", "BNC", "RCA"	45±3	PP

Description	Part No.
Compression Connector Crimp Tool	CP-808



110 Punch Down Tool Bundle

- Wire stripper tool (UTP/STP multiconductor cable from 3.2~9mm max.)
- Punch down tool with 110/88 blade



New

DIY Crimp Bundle For Phone & Computer

- Wire Stripper Tool (UTP/STP Multiconductor cable from 3.2~9mm max.)
- Modular Crimping Tool (8P8C, 6P6C, 6P4C, 6P2C)
- RJ-45 Connector (10 pcs)
- RJ-11 Connector (10 pcs)



New

Description	Part No.
Punch Down Tool Bundle	PK-9102

Description	Part No.
Diy Crimp Bundle For Phone & Computer	PK-9103

Weatherproof Compression Tool Bundle

- All Purpose Snip
- Coaxial Stripping Tool For RG-58, 89, 62 & 6 type
- Compression Connector Crimping Tool For RG-59 & 6
- Compressed distance: 0.8"±0.06" (Inch/Metric)
- 10 pcs F-Type Compression Connector for RG6 Quad Coaxial Cable



New

Network Tool Bundle

- Wire Stripper Tool (UTP/STP Multiconductor cable from 3.2~9mm max.)
- Modular Crimping Tool (8P8C, 6P6C, 6P4C, 6P2C)
- Punch Down Tool with 110/88 blade
- RJ-45 Connector (10 pcs)
- RJ-11 Connector (10 pcs)



New

Description	Part No.
Weatherproof Compression Tool Bundle	PK-9104

Description	Part No.
Network Tool Bundle	PK-9105

DIE Set



See Catalog Page 6 for Details

Die Set	Application	Photos	Crimp Size	Description	Part No.
	AWG 8, 12-10, 16-14, 22-18		Insulated Terminals	Lunar Frame w/die	CP-336FD27
				Ergo-Lunar frame w/die	1PK-3003FD27
				CrimPro frame w/die	CP-372FD27
				Die Only	9PK-3003D27

Cutter

ACSR Cutter

Features

- Ideal for cutting steel wire, low carbon steel bar and aluminum cable
- Blade return is available during cutting
- Ratchet mechanism for convenient handle operated control
- With heavy duty blade
- Dimension: 13-2/5" x 5" x 1-1/2"



Ideal cutting capability



Ratchet release design




Packaged with a bag


Application

		
Cu-Al Cable Up to 750MCM(Ø1.2")	ACSR Up to 750MCM(Ø1.2")	Prestressed steel wire Up to Ø0.55"

Description	Part No.
ACSR Cutter	902-306

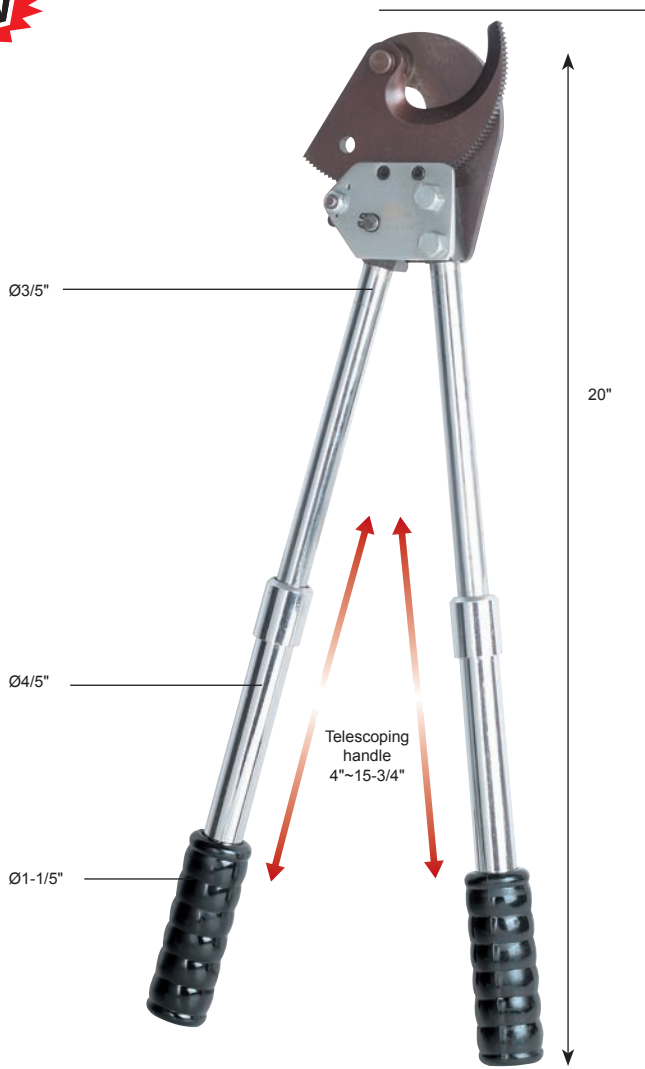

Pliers

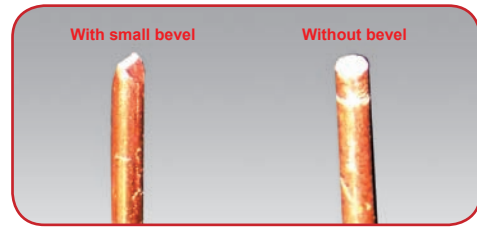

Smooth surface is cut by PM-721/PM-723




Adjustable screw

4-1/2" Diagonal Semi-Flush Cutting Nipper

- Material: 63CRM
- Application: Copper 1.3mm

New

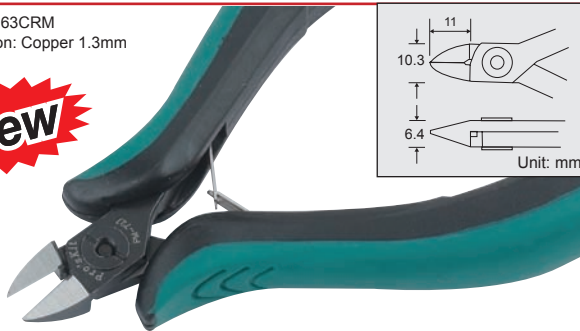


OAL: 4-1/2"

4-1/2" Diagonal Flush Cutting Nipper

- Material: 63CRM
- Application: Copper 1.3mm

New

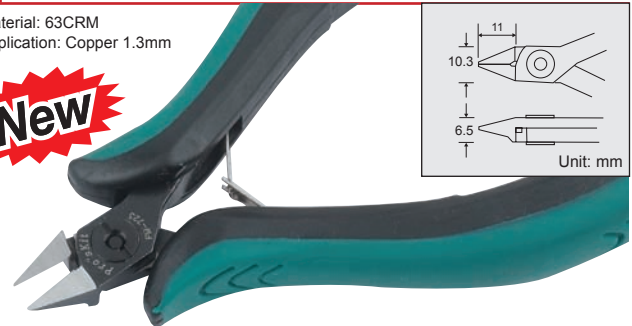

OAL: 4-1/2"


Description	Part No.
4-1/2" Diagonal Semi-Flush Cutting Nipper	PM-721

Description	Part No.
4-1/2" Diagonal Flush Cutting Nipper	PM-723

5" Cutting Plier

- Material: SAE6050
- Application: Copper 1.3mm

New

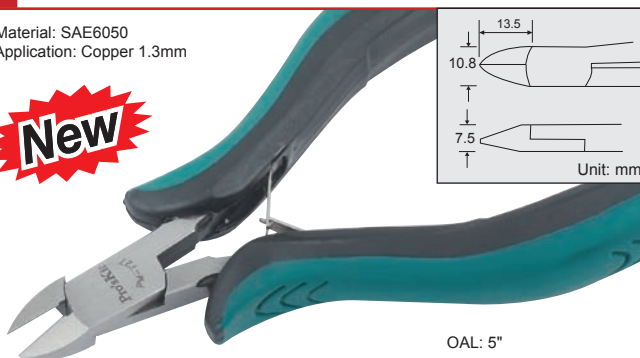


OAL: 5"

5" Cutting Plier

- Material: SAE6050
- Application: Copper 1.3mm

New

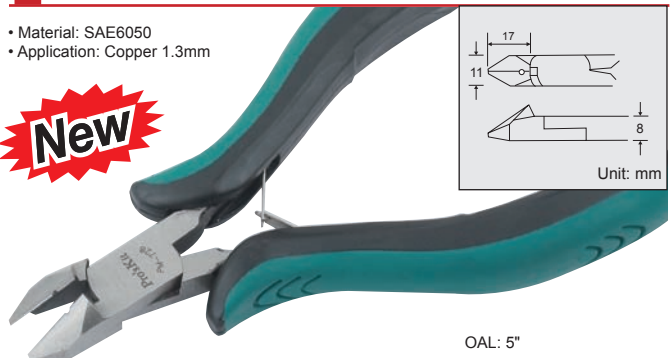

OAL: 5"

Description	Part No.
5" Cutting Plier	PM-727

Description	Part No.
5" Cutting Plier	PM-728




4 1/2" Diagonal Cutting Plier



Description	Part No.
4 1/2" Pointed Diagonal Plier	PM-023C

5" Round Nose Plier

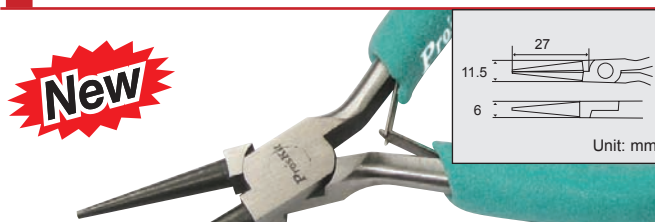

Description	Part No.
5" Round Nose Plier	PM-029C

5" Snipe Nose Plier



Description	Part No.
5" Snipe Nose Plier	PM-036C

4 1/2" Diagonal Cutting Plier



Description	Part No.
4 1/2" Diagonal Cutting Plier	PM-037C

6" Needle Nose Plier



Description	Part No.
6" Needle Nose Plier	PM-046C

5" Flat Nose Plier



Description	Part No.
5" Flat Nose Plier	PM-053C

5" Bent Nose Plier



Description	Part No.
5" Bent Nose Plier	PM-055C

Tool Kits

4 Pc Ergonomic ESD Safe Plier And Cutter Kit



Item#: 9ST-902

- 5" Bent nose
- 4 1/2" Diagonal cutting
- 4 1/2" Pointed diagonal pliers
- 5" Flat nose pliers

Item#: PK-ST902

Description	Part No.
4 Pc Ergonomic ESD Safe Plier And Cutter Kit	PK-ST902
Empty case	9ST-902



Empty case

Premise Pro Kit



(Empty Case #Case001)

- Zipper bag
- 4P/6P/8P telcom crimping tool
- Punch down tool with 110/66 blades
- All-in-one toner & probe kit
- In-line modular adapters 4/6/8 pin 3 in 1
- Compression tool for RG59/RG6/RG11 type waterproof connectors
- Universal stripping tool(UTP/STP/RG-59/6/7/11)

Description	Part No.
Premise Pro Kit	902-296

DataGo Kit



- Zipper bag
- Pro-crimper modular tool
- Punch down tool with 110/66 blades
- Multi-modular cable tester
- Wire stripper tool
- Modular plug 8P8C round cable, solid wire, 50u"(unit:10 pcs/bag)
- Spare pocket and tool holders allow user to expand the tool kit usage as they learn new applications



(Empty Case #Case001)

Description	Part No.
DataGo Kit	902-297

DataTel Pro Kit



- Zipper Bag
- Modular crimping tool
- Punch down tool with 110/66 blades
- All-in-one toner & probe kit
- In-line modular adapters 4/6/8 pin 3in1"
- Wire stripper tool
- Tap into data and telephone lines for monitoring and testing using the 8-way modular adaptor with all patch cables included
- Tone, trace and test all telephone, and data cables with the Universal Cable Tester including USB, and Modular Plug cables
- Detec 10Mb and 100Mb Ethernet signals



(Empty Case #Case001)

Description	Part No.
DataTel Pro Kit	902-298

Professional Satellite and Cable TV Compression Kit



- Zipper bag
- Cable tester
- Compression tool for RG59/RG6/RG11 type waterproof connectors
- Universal stripping tool(UTP/STP/RG-59/6/7/11)
- Round cable cutter (165mm)
- Coax flaring tool



(Empty Case #Case001)

Description	Part No.
Professional Satellite and Cable TV Compression Kit	902-301

Satellite and Cable TV Compression Kit

- Mechanic's tool bag(12"x6"x6-1/2")
- Cable tester
- Waterproof connector crimping tool for rg-59(4c),rg-6(5c)
- Coax flaring tool
- Universal stripping tool(UTP/STP/RG-59/6/7/11)



(Empty Case #MTB-1)

Description	Part No.
Satellite and Cable TV Compression Kit	902-300

Universal Compression Kit

- Zipper bag
- Cable tester
- Compression tool for RG59/RG6/RG11 Type waterproof connectors
- Universal stripping tool(UTP/STP/RG-59/6/7/11)
- Round cable cutter (165mm)
- Coax flaring tool



(Empty Case #MTB-1)

Description	Part No.
Universal Compression Kit	902-310

VoIP Kit

- Deluxe portable tool bag
- 4P/6P/8P telcom crimping tool
- Punch down tool with 110/66 blades
- All-in-one toner & probe kit
- In-line modular adapters 4/6/8 pin
- 3 in 1 Wire stripper tool
- Double end socket can wrench
- Connector-crimping plier
- Telecom mini-test set
- 6 In 1 magnetic quick change screwdriver ec#800-080
- Probe-pic spudger
- Utility component storage box (187.5X117X22mm)
- Electricians scissors
- 6" Side cutting plier
- 6" Long nose plier



(Empty Case #900-106)

Description	Part No.
VoIP Kit	902-299



Master Electrical Tool Kit

- Utility knife (3 blades self loading)
- Electrician's scissors
- Flashlight
- 8" Adjustable wrench
- PVC insulated tape
- Contact voltage tester
- Lineman's plier
- Side cutting plier
- Long nose plier (165mm)
- 110V Quick heat ceramic soldering Iron
- 6" Slip joint plier
- 8" Groove joint plier
- Pen solder 63%
- Pro-soft screwdriver (3.0x75mm)
- Pro-soft screwdriver (#0x75mm)
- Pro-soft screwdriver (5x75mm)
- Pro-soft screwdriver (#1x75mm)
- Pro-soft screwdriver (6x100mm)
- Pro-soft screwdriver (#2x100mm)
- Pro-soft screwdriver (#2x200mm)
- Heavy duty wire strippers/crimpers (206mm)
- Measuring tape (5m/16ft)
- 9Pcs ball point long arm hex key set (1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 1/4", 5/16", 3/8")
- Flex head ratchet wrenches
Inch: 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 3/4"
- 3 3/4 Multi-meter
- Ball peen hammer with fiberglass handle
- Utility component storage box (187.5X117x22mm)
- Plastic pipe cutter [6mm-25mm o.D(3/4", I.D.)]
- All purpose snip
- Aluminum frame tool case w/2 pallets



Description	Part No.
Master Electrical Tool Kit	PK-4027AI

Telecom & Network Installation Tool Kit

- 5 Pcs needle file set
- CrimpPro(frame only)
- Die set, RJ11
- Die set, RJ45 modular plugs 8 position(standard plugs,not AMP)
- Punch down tool (with 110 blades)
- Replacement blade for CP-3140 with 66 type
- Die set for CATV F connectors RG 59,6
- Die set for RG 58,59,62,6
- Utility knife(3 blades Self Loading)
- Electrician's scissors
- Desoldering pump
- Flashlight
- 6" Adjustable wrenches
- PVC insulated tape
- Contact voltage tester
- 8" Combination plier
- 6" Side cutting plier
- 6" Long nose plier
- 110V Quick heat ceramic soldering iron
- 8"Groove joint plier
- Pro-soft screwdriver (5x75mm)
- Pro-soft screwdriver (#1x75mm)
- Pro-soft screwdriver (6x100mm)
- Pro-soft screwdriver (#2x100mm)
- Pro-soft screwdriver (6x40mm)
- Pro-soft screwdriver (#2x40mm)
- Wire stripper tool
- Measuring tape (3m/10ft)
- 9Pcs ball point long arm hex key set (1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 1/4", 5/16", 3/8")
- Cable sniffer-remote
- In-line modular adapters 4/6/8 pin 3 in 1
- Ball peen hammer with fiberglass handle
- All purpose snip
- Soft side tool pouch
- Aluminum frame tool case w/2 pallets



Description	Part No.
Telecom & Network Installation Tool Kit	PK-4028AI

Fiber Optics

Fiber Optic Visual Fault Locator



Continuity test



laser class	Class 3A laser diode
Nominal wavelength	650nm/+/-10nm
Connector interface	1.25 mm for LC
Dimensions Length	Length 155 +/- 2 mm , Diameter 13.5 mm

Description	Part No.
Fiber Optic Cable Tester	MT-7509

Fiber Optic Tool Kit

- Fiber Optic Visual Fault Locator
- Foam Swabs Cleaning Kit
- Fiber Optic Viewing Scope Kit (SC/PC/FC)
- Fiber Optic Viewing Scope Disk (LC)
- Fiber Optical Stripper
- Carbide Fiber Scribe
- Fiber Polishing Disk
- Fiber Polishing Disk
- Fiber Polishing Disk
- Universal syringe 2.5ml
- 8.7" Fiber Optic Crimping Tool
- Fiber Optic Kevlar Cutter
- Deluxe Compact Tool Case
- Utility Component Storage Box




Description	Part No.
Fiber Optic Cable Tester (with 2.5mm Fault Locator)	PK-6942
Fiber Optic Cable Tester (with 1.25 and 2.5mm Fault Locator)	PK-6940

Tweezers

ERGO-GRIP TWEEZER SERIES

(For Electronics and Precision Industries)

- Cushioned ESD handles increase operation comfort with less fatigue.

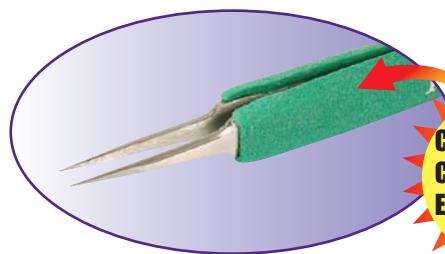


**Comfortable
Cushioned
ESD Handles.**


ESD
SAFE



Super Fine Tip Straight (4-3/4")

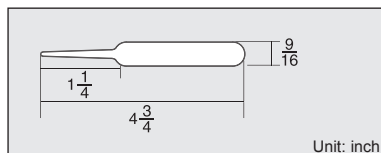


Unit: inch

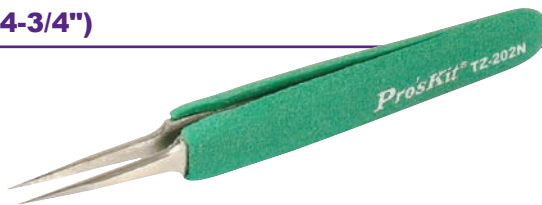

New

Description	Material	Magnetic	Part No.
Super Fine Tip Straight Tweezer (4-3/4")	Stainless AISI410	Non	TZ-202N

Fine Tip Curved (4-3/4")

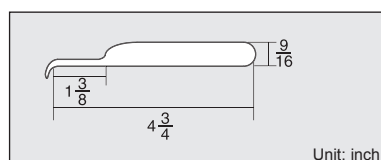


Unit: inch



New

Description	Material	Magnetic	Part No.
Fine Tip Curved Tweezer (4-3/4")	Stainless AISI410	Non	TZ-204N

Fine Tip Straight (5-9/16")

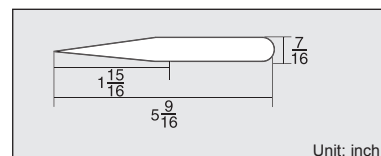


Unit: inch



New

Description	Material	Magnetic	Part No.
Fine Tip Straight Tweezer (5-9/16")	Stainless AISI410	Non	TZ-205N

Extremely Fine and Sharp Tip (5-1/16")

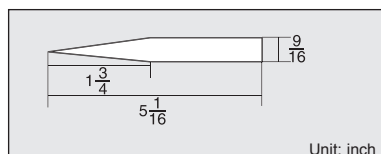


Unit: inch



New

Description	Material	Magnetic	Part No.
Extremely Fine And Sharp Tip (5-1/16")	Stainless AISI410	Non	TZ-212N

Super Fine Tip Straight (4-3/4")

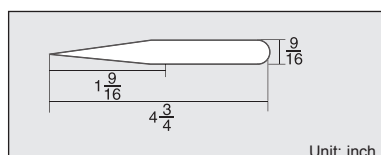

Unit: inch




New

Description	Material	Magnetic	Part No.
Super Fine Tip Straight (4-3/4")	Stainless AISI410	Non	TZ-225N

2009 NEW PRODUCTS

Super Fine Tip Straight Tweezer



New



- Precise tip offer safe access to hard-to-reach area
- Made of stainless steel with non-magnetic surface, and acid resistant.
- Brushed finish tweezers made from Vommaloy
- Spec. No.00/120mm
- Magnetic: Non

Description	Part No.
Super Fine Tip Straight Tweezer	1PK-125T

Punch Down Tool

Punch Down Impact Tool

- Feature
- The rubber grip handle provides easy operation and user comfort
 - With the blade storage chamber on the top of the handle
 - Increased HI/LO impact forces to meet demands of all Category cables through Cat6

Material	Application
Body: ABS+TPR Blade: SAE4140	Hi-low adjust pressure Hi: 40 lbs (178 N) Low: 30 lbs (133 N)
Description	Part No.
Punch down tool with 110 blade and 66 blade each	CP-3150
Replacement type 66 blade	700-008
Replacement type 110 blade	700-009


New



Miscellaneous

Pin Extractor Set

- Features
- Designed for use with various connectors such as MOLEX, AMP, TYCO, etc.
 - Contains 5 different size insertion tools
 - Packed with pouch bag, easy to carry and store



New

Contents

L	DØ	dØ	(D-d)/2	Remark
0.45"	0.150"	0.122"	0.014"	
0.57"	0.106"	0.085"	0.011"	Inter-locking
0.50"	0.157"	0.110"	0.023"	
0.79"	0.126"	0.102"	0.012"	V.35 male
0.67"	0.130"	0.110"	0.008"	V.35 female

Description	Part No.
5 Pcs Pin Extractor Set	CE-0275



Put the pin extractor into housing



Push the plunger of pin extractor




Extract the pin

Flex Head Ratchet Wrenches

Features

- Made of high quality chrome-vanadium steel and fully polished throughout
- Needs as little as 5 degrees of sweep to move a fastener
- Flex Head rotates 180 degrees
- Available in Metric and Inch sizes, and sold individually or in sets



Flex head rotates 180 degrees

New



S(mm / inch)	L (inch)
8 / 5/16"	5-1/2"
10 / 3/8"	6"
11 / 7/16"	6-4/5"
13 / 1/2"	7-3/5"
14 / 9/16"	8-2/5"
17 / 5/8"	9"
19 / 3/4"	9-4/5"

Description	Part No.
7pcs Set / Inch Size	HW-5907I
7pcs Set / Metric Size	HW-5907M

IC Insertion Tool

IC Insertion tool provides precise insertion without damage to the device, component or PC board.

Feature

- Precise insertion without damage.
- Easy operation with one hand.
- IC insertion tool for chips.
- Rugged ABS Material.



Item#: PD-H005



Item#: PD-H007



Item#: PD-H009



Item#: PD-H010

Description	Part No.
IC Insertion Tool(14/16 Pins)	PD-H005
IC Insertion Tool(18/20 Pins)	PD-H007
IC Insertion Tool(24/28 Pins)	PD-H009
IC Insertion Tool(36/40 Pins)	PD-H010

Flat Claw Hammer



Feature

- The Flat Claw Hammer is used for framing and ripping jobs.
- Polished drop-forged, tempered steel head.
- The TRP handle is lightweight, durable and waterproof.
- The non-slip handle provides comfortable and secure grip.
- 16oz head

Specification

- OAL: 12.8inch
- Weight: 24.8oz
- Output torque: >205ozf.inch

Description	Part No.
Flat Claw Hammer	902-304

PVC Insulated Tape



Suitable for Wrapping Electric Wires and Cables

Features:

- Resistance high voltage
- It features good insulation, thermal stability, and high dielectric strength.
- Designed specially for insulating separated electrical wires and for protection purposes.

Specifications:

Width	3/4"
Length	66ft
Thickness	0.005"
Color	Black
Temperature	65 degrees Celsius
Voltage breakdown	4KV
Package:	10pcs/roll



Description	Part No.
PVC Insulated Tape	902-316

Measuring Devices

9" Torpedo Level



OAL : 9"

Features:

- Lightweight and compact
- With magnet for hands-free work
- Provides accurate readings, including horizontal, vertical and 45-degree angles.
- Easy-to-read with fluorescent green gauges

Materials	ABS plastic construction
3 Vials	45°, 90° & 180°

Description	Part No.
9" Torpedo Level	PD-155

Measuring Wheel

Features:

- Compact measuring wheel, convenient for quick estimates.
- Ideal for real estate agents, professional tradesmen and homeowners.
- Arrow starting-point indicator for easy measurements.
- 3 section telescoping handle is easy and ultra-convenient for storage, transport, adjusting and locking.
- Dual rubber wheel provides greater stability and long life.

Specification:

- Inches single medium wheel
- Aluminum telescope handle



Reading unit	1 inch
Measuring range	9999ft & 11
Handle storage length	20.5ft
Handle maximum length	39.375ft
Wheel circumference	24"
Wheel diameter	7"-5/8"
Mini unit	1"



Description	Part No.
Measuring Wheel	PD-156

Magnetic Level

Item: 902-308-12



Item: 902-308-32



Item: 902-308-48



Features

- Precision purpose magnetic level.
- Aluminum alloy frame, oxidized surface in blue color.
- V style bottom with magnetic, work hands-free.
- Dual rubber end caps for extreme shock resistance.
- Ergonomic rubber grip for additional stability when working.(902-308-32/902-308-48 only)
- Double Milled measuring surface with 3 vials read plumb and level.



2 plumb and 1 level vials for providing user a faster, accurate to read



With magnet





Dual rubber end caps

Description	Part No.
12" Magnetic Level	902-308-12
32" Magnetic Level	902-308-32
48" Magnetic Level	902-308-48

Screwdrivers

14-IN-1 Screwdriver Set

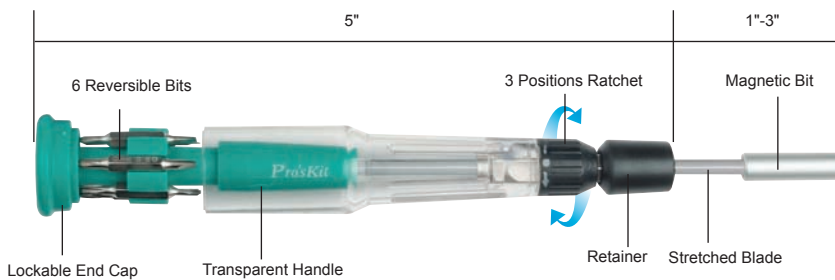



Push downward the retainer and pull the end cap out from the handle



Description	Part No.
14-IN-1 Screwdriver Set	SD-9812

Contents	Double end blade
T4XT8	8660Cr-Mo-V Steel 30mmx4mm
T6XT10	
T7XT15	
1.5X #000	
2.0X #00	
2.5X #0	

24-IN-1 Screwdriver Set

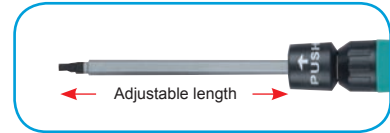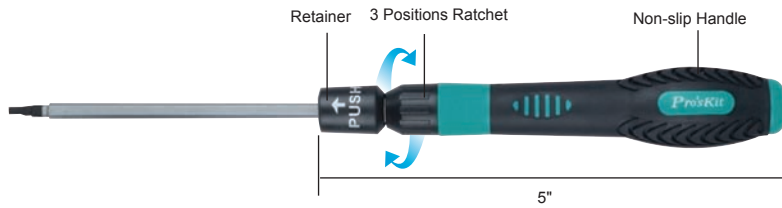



Contents	Double end blade
PZ#1, PZ#0	6-1/4"x0.16" 8660Cr-M0-V Steel
T5H, T6H, T7H, T8H, T9H, T10H, T15H, T20H	
H1.5, H2.0, H2.5, H3.0, H3.5, H4.0	
PH1, PH0, PH00, PH000	
1.5, 2.0, 3.0, 4.0	

Description	Part No.
24-IN-1 Screwdriver Set	SD-9824

New



18-IN-1 Precision Screwdriver Set

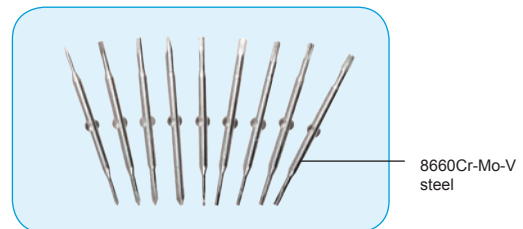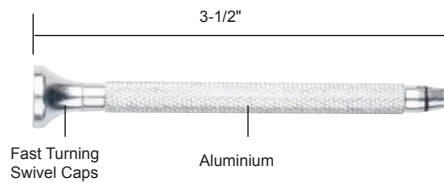

Change bits easily



Fast turning swivel caps

New

Contents	Bit Length
1.5, 2.0, 2.5, 3.0	2"
T5, T6, T7, T8, T9, T10	
#000, #00, #0, #1	
H1.5, H2.0, H2.5, H1.3	

Description	Part No.
18-IN-1 Precision Screwdriver Set	SD-9811



7 in 1 Insulated Driver Set Interchangeable VDE 1KV

- Certified to IEC/DIN EN 60900 1000V VDE safety standards
- Includes 7 interchangeable screwdriver blades with 1 handle



New

1000V



**1000V 08
IEC 60900**

Tip Style	Width(mm)	Thick(mm)	Blade(mm)	Materials
SL	3.0	0.5	100	8660Cr-Mo-V
SL	4.0	0.8	100	
SL	6.5	1.2	100	
PH0,PH1,PH2	-	-	100	
T10	-	-	100	S2



Description	Part No.
7 in 1 Insulated Driver Set Interchangeable VDE 1KV	SD-807


7pcs Metric Hex Nut Driver Set

- Extra-thin walled metric hex nut driver set, with duplex color rubber handles for hexagon nuts and bolts
- Complete set pack contains 7 different hex nut drivers with vinyl storage pouch.


Features:

- Soft Grip Handle for comfortable and powerful handling in operation.
- Insert molded blades for improved grip.
- Precision blades ensure perfect fit every time.

Nut: carbon steel Blade: Chrome Vanadium steel Ø5/32" Handle: duplex color rubber

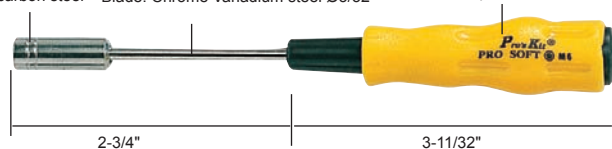

The outer diameter of the head is made narrow for use with D-Sub connector standoffs



New




Contents

19400-M3(3mm)
19400-M3.5(3.5mm)
19400-M4(4mm)
19400-M4.5(4.5mm)
19400-M5(5mm)
19400-M5.5(5.5mm)
19400-M6(6mm)

Description	Part No.
7pcs Metric Hex Nut Driver Set	1PK-9402

High quality bits at an economical price. Made from S-2 tool steel with a Hardness of HRC 59°~61°

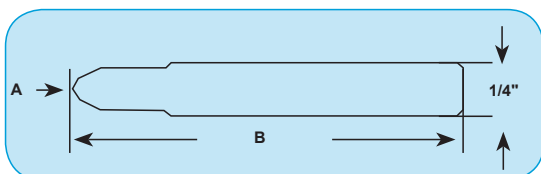

Slotted Bits 1/4" Hex drive power bits



Part No.	A	B
SL12X1-15/16	1-2	1-15/16"
SL23X1-15/16	2-3	1-15/16"
SL34X1-15/16	3-4	1-15/16"
SL45X1-15/16	4-5	1-15/16"
SL56X1-15/16	5-6	1-15/16"
SL68X1-15/16	6-8	1-15/16"
SL810X1-15/16	8-10	1-15/16"
SL1012X1-15/16	10-12	1-15/16"
SL1214X1-15/16	12-14	1-15/16"

Phillips Bits 1/4" Hex drive insert bits



Part No.	A	B
PH0X1	#0	1"
PH1X1	#1	1"
PH2X1	#2	1"
PH3X1	#3	1"

Phillips Bits 1/4" Hex drive power bits



Part No.	A	B
PH0X1-15/16	#0	1-15/16"
PH1X1-15/16	#1	1-15/16"
PH2X1-15/16	#2	1-15/16"
PH3X1-15/16	#3	1-15/16"

PoziDrive Bits 1/4" Hex drive power bits.




Part No.	A	B
PZ0X1-15/16	0	1-15/16"
PZ1X1-15/16	1	1-15/16"
PZ2X1-15/16	2	1-15/16"
PZ3X1-15/16	3	1-15/16"
PZ4X1-15/16	4	1-15/16"

Star-Tip Bits 1/4" Hex drive insert bits.



Part No.	A	B
T5X1	T-5	1"
T6X1	T-6	1"
T7X1	T-7	1"
T8X1	T-8	1"
T9X1	T-9	1"
T10X1	T-10	1"
T15X1	T-15	1"
T20X1	T-20	1"
T25X1	T-25	1"
T27X1	T-27	1"
T30X1	T-30	1"

Star-Tip Bits 1/4" Hex drive power bits



Part No.	A	B
T5X1-15/16	T-5	1-15/16"
T6X1-15/16	T-6	1-15/16"
T7X1-15/16	T-7	1-15/16"
T8X1-15/16	T-8	1-15/16"
T9X1-15/16	T-9	1-15/16"
T10X1-15/16	T-10	1-15/16"
T15X1-15/16	T-15	1-15/16"
T20X1-15/16	T-20	1-15/16"
T25X1-15/16	T-25	1-15/16"
T27X1-15/16	T-27	1-15/16"
T30X1-15/16	T-30	1-15/16"

Tamper Resistant Star-Tip Bits

1/4" Star-Tip drive insert bits: tamper resistant. Tamper resistant Star-Tip screws feature a post in the center of the recess. This post will only fit into a tamper resistant Star-Tip bit.



Part No.	A	B
T7HX1	T-7H	1"
T8HX1	T-8H	1"
T9HX1	T-9H	1"
T10HX1	T-10H	1"
T15HX1	T-15H	1"
T20HX1	T-20H	1"
T25HX1	T-25H	1"
T27HX1	T-27H	1"
T30HX1	T-30H	1"

Tamper Resistant Star-Tip Bits

1/4" Hex drive power bits.



Part No.	A	B
T7HX1-15/16	T-7H	1-15/16"
T8HX1-15/16	T-8H	1-15/16"
T9HX1-15/16	T-9H	1-15/16"
T10HX1-15/16	T-10H	1-15/16"
T15HX1-15/16	T-15H	1-15/16"
T20HX1-15/16	T-20H	1-15/16"
T27HX1-15/16	T-27H	1-15/16"
T30HX1-15/16	T-30H	1-15/16"

Hex Head Bits

1/4" Hex drive insert bits; SAE.



Part No.	A	B
HX1/16X1	1/16"	1"
HX5/64X1	5/64"	1"
HX3/32X1	3/32"	1"
HX7/64X1	7/64"	1"
HX1/8X1	1/8"	1"
HX9/64X1	9/64"	1"
HX5/32X1	5/32"	1"
HX3/16X1	3/16"	1"
HX7/32X1	7/32"	1"
HX1/4X1	1/4"	1"

Hex Head Bits

1/4" Hex drive insert bits; Metric.



Part No.	A	B
HX1.5X1	1.5mm	1"
HX2X1	2mm	1"
HX2.5X1	2.5mm	1"
HX3X1	3mm	1"
HX4X1	4mm	1"
HX5X1	5mm	1"
HX6X1	6mm	1"
HX7X1	7mm	1"

Hex Head Bits

1/4" Hex drive power bits; SAE.



Part No.	A	B
HX1/16X1-15/16	1/16"	1-15/16"
HX5/64X1-15/16	5/64"	1-15/16"
HX3/32X1-15/16	3/32"	1-15/16"
HX7/64X1-15/16	7/64"	1-15/16"
HX1/8X1-15/16	1/8"	1-15/16"
HX9/64X1-15/16	9/64"	1-15/16"
HX5/32X1-15/16	5/32"	1-15/16"
HX3/16X1-15/16	3/16"	1-15/16"
HX7/32X1-15/16	7/32"	1-15/16"
HX9/32X1-15/16	9/32"	1-15/16"

Ball Hex Head Bits

1/4" Hex drive power bits : SAE



Part No.	A	B
BHX5/64X3-1/2	5/64"	3-1/2"
BHX3/32X3-1/2	3/32"	3-1/2"
BHX7/64X3-1/2	7/64"	3-1/2"
BHX1/8X3-1/2	1/8"	3-1/2"
BHX9/64X3-1/2	9/64"	3-1/2"
BHX5/32X3-1/2	5/32"	3-1/2"
BHX3/16X3-1/2	3/16"	3-1/2"
BHX7/32X3-1/2	7/32"	3-1/2"
BHX1/4X3-1/2	1/4"	3-1/2"

Ball Hex Head Bits

1/4" Hex drive power bits; Metric



Part No.	A	B
BHX2X3-1/2	2mm	3-1/2"
BHX2.5X3-1/2	2.5mm	3-1/2"
BHX3X3-1/2	3mm	3-1/2"
BHX4X3-1/2	4mm	3-1/2"
BHX5X3-1/2	5mm	3-1/2"
BHX6X3-1/2	6mm	3-1/2"

Spanner Security Bits

1/4" Hex drive insert bits.



Part No.	A	B
SSP4X1	#4	1"
SSP6X1	#6	1"
SSP8X1	#8	1"
SSP10X1	#10	1"

Soldering/Assembly

Desoldering Pump

- Material: ABS
- Suction Capability: 35 cm-hg
- OAL: 8-1/4"



Replacement Tip:
5DP-366D-T



Soft Handle



Quick and easy solder residue
clearance



Piston with double oil seals

Description	Part No.
Desoldering Pump	DP-366D

Testers

Cable Sniffer-Remote

- Simple one push-button operation
- Power supplied by a 9V battery (Not included)
- Palm size design, easy to carry around
- Detects open, short, miswired and cross-connected wire
- Four types of connectors provided to test RJ-45, RJ-11, USB and BNC
- Protect itself against damage from line voltage



Description	Part No.
Cable Sniffer-Remote	MT-7057

Cable Tester

- Blue LED inside, measurement can be identified clearly even in dark area
- Auto-detecting function for battery power examination
- Pen-sized, handy tester for quick and easy AC/DC voltage testing.
- AC Voltage Test: 70 to 600 VAC
- DC Voltage Test: Up to 12, 36, 55 VDC
- GS, VDE certified
- Great value for money
- Materials: Handle ABS / 94-V0
- Battery Type: Silver oxide batteries (2 pcs / Included)



Induction Test

Circuit Continuity
Test

Blue LED

Display Panel



Easy operation




Auto-detecting function



Blue LED inside



Pen size design

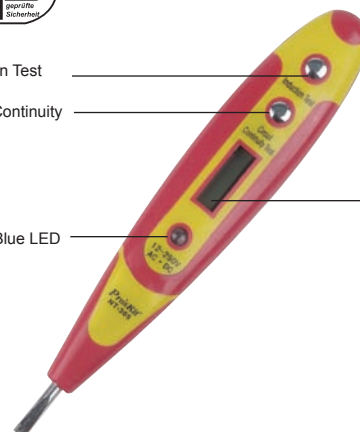

Description	Part No.
Cable Tester	NT-305

OAL: 5-1/2"

3 3/4 Smart Multimeter

Features

- Intelligent one touch power button with three optional function keys
- Safety, one hand operation
- Ergonomic design with rugged construction
- Includes quality testing leads, and battery

Specifications

- Maximum Voltage: Between any Terminal and Earth Ground 600 V rms.
- Display: 3 3/4-digits, 4000 counts, updates 3/sec.
- Overload Indication: "OL" show on right up of the LCD.
- Use environment: Temperature 32 to 104°F (0°C to 40°C), humidity < 85% RH.
- Storage environment: Temperature -4 to 140°F (-20°C to 60°C), humidity < 95% RH.
- Altitude: Operating under 2000m, Storage under 10,000m
- Battery Type: Alkaline 1.5V AA 2 pieces or equivalent
- Size (HxWxL): 3.36 cm (D) x 7.82 cm (W) x 15.8 cm (H) (1.32 in x 3.08 in x 6.22 in).
- Weight: 290g (10 oz).
- Safety standards: (ETL / LVD), The meter is up to the standards of IEC1010 Pollution Degree 2, Overvoltage Category III. Rated 600Vac CATIII, Rated 1000Vdc CATII.
- Accuracy is $\pm$ (% of reading + number in last digit) at $23 \pm 5^\circ\text{C}$, <75% RH.
- Temperature Coefficient: 0.1 %/°C

New



ONE-TOUCH

At Smart Mode

Function	Range	Resolution	Accuracy
ACV	4.000V	1 mV	$\pm(0.8\% +3)$
	40.00V	10 mV	$\pm(0.8\% +3)$
	400.0V	0.1 V	$\pm(0.8\% +3)$
	500V	1 V	$\pm(1.2\% +3)$
DC V	$\pm 4.000\text{ V}$	1 mV	$\pm(0.5\% +3)$
	$\pm 40.00\text{ V}$	10 mV	$\pm(0.5\% +3)$
	$\pm 400.0\text{ V}$	0.1 V	$\pm(0.5\% +3)$
	$\pm 500\text{ V}$	1 V	$\pm(0.8\% +3)$
Ω	400.0 Ω	0.1 Ω	$\pm(1\% +5)$
	4.000 k Ω	1 Ω	$\pm(1\% +3)$
	40.00 k Ω	10 Ω	$\pm(1\% +3)$
	400.0 k Ω	0.1 k Ω	$\pm(1\% +3)$
	4.000 M Ω	1 k Ω	$\pm(1\% +3)$
	40.00 M Ω	10 k Ω	$\pm(2\% +3)$
AC A (50 to 400Hz)	005.0~400.0mA 4.000A	0.1mA 1mA	$\pm(2.5\% +5)$ $\pm(2.5\% +5)$
DC A	005.0~400.0mA 4.000A	0.1mA 1mA	$\pm(2\% +5)$ $\pm(2\% +5)$

At 3 Buttons Selecting Mode

Function	Range	Resolution	Accuracy
AC V (40 to 400Hz)	400.0mV	0.1 mV	$\pm(1.2\% +3)$
	4.000V	1 mV	$\pm(0.8\% +3)$
	40.00V	10m V	$\pm(0.8\% +3)$
	400.0V	0.1 V	$\pm(0.8\% +3)$
	500V	1V	$\pm(1.2\% +3)$
DC V	$\pm 400.0\text{ mV}$	0.1 mV	$\pm(0.5\% +3)$
	$\pm 4.000\text{ V}$	1 mV	$\pm(0.5\% +3)$
	$\pm 40.00\text{ V}$	10 mV	$\pm(0.5\% +3)$
	$\pm 400.0\text{ V}$	0.1 V	$\pm(0.5\% +3)$
	$\pm 500\text{ V}$	1 V	$\pm(0.8\% +3)$
Ω	400.0 Ω	0.1 Ω	$\pm(1\% +5)$
	4.000 k Ω	1 Ω	$\pm(1\% +3)$
	40.00 k Ω	10 Ω	$\pm(1\% +3)$
	400.0 k Ω	0.1 k Ω	$\pm(1\% +3)$
	4.000 M Ω	1 k Ω	$\pm(1\% +3)$
	40.00 M Ω	10 k Ω	$\pm(2\% +3)$
AC A (40 to 400Hz)	005.0~400.0mA 4.000A	0.1mA 1mA	$\pm(2.5\% +5)$ $\pm(2.5\% +5)$
DC A	005.0~400.0mA 4.000A	0.1mA 1mA	$\pm(2.5\% +5)$ $\pm(2.5\% +5)$
Capacity	40nF~40 μF 400 μF ~4000 μF	10pF 0.1 μF	$\pm(3\% +5)$ $\pm(20\% +5)$
Continuity	Less than 100_ Approx.		
Diode	Test voltage : Approx. 2.8V		

Description	Part No.
3 3/4 Smart Multimeter	MT-1503

Professional Digital Multimeter / Digital Multimeter



USB Compatible

New

Item # :MT-1860



RS232 Compatible

New

Item # :MT-1820

Model Number	MT-1860	MT-1820
Model Name	Professional Digital Multimeter	Professional Digital Multimeter
Size (HxWxD)mm	185x91x49	192x95x48
Weight (g)	410	390
Counts	5999	5999
Digits	3 5/6	3 5/6
Auto/Manual ranging	Auto	Both
DC Voltage	600mV/6V/60V/600V $\pm(0.5\%+4d)$ 1000V $\pm(1.0\%+4d)$	600mV/6V/60V/600V $\pm(0.5\%+4d)$ 1000V $\pm(1.0\%+6d)$
AC Voltage	6/60/600V $\pm(0.8\%+10d)$ 750V $\pm(1.0\%+6d)$	6/60/600V $\pm(0.8\%+10d)$ 750V $\pm(1.0\%+10d)$
DC Current	60/600mA $\pm(1.0\%+10d)$ 6A/10A $\pm(1.2\%+10d)$	600 μ A/6000 μ A $\pm(1.0\%+10d)$ 60/600mA $\pm(1.0\%+10d)$ 6A/10A $\pm(1.2\%+10d)$
AC Current	60/600mA $\pm(1.5\%+10d)$ 6A/10A $\pm(2.5\%+15d)$	600 μ A/6000 μ A $\pm(1.5\%+10d)$ 60/600mA $\pm(1.5\%+10d)$ 6A/10A $\pm(2.0\%+15d)$
Resistance	600 Ω $\pm(0.8\%+5d)$ 6/60/600K/6M Ω $\pm(0.8\%+4d)$ 60M Ω $\pm(1.2\%+10d)$	600 Ω $\pm(0.8\%+5d)$ 6/60/600K/6M Ω $\pm(0.8\%+4d)$ 60M Ω $\pm(1.2\%+10d)$
Frequency	10/100/1000Hz $\pm(0.3\%+2d)$ 10K/100KHz $\pm(0.3\%+2d)$ 1M/20MHz $\pm(0.3\%+2d)$	100/1000Hz $\pm(0.5\%+4d)$ 10K/100KHz $\pm(0.5\%+4d)$ 1M/20MHz $\pm(0.5\%+4d)$
Capacitance	40nF $\pm(5\%+30d)$ 400nF/4 μ F/40 μ F $\pm(3.5\%+8d)$ 200 μ F $\pm(5.0\%+10d)$	40nF $\pm(5\%+30d)$ 400nF/4 μ F/40 μ F $\pm(3.5\%+8d)$ 200 μ F $\pm(5.0\%+10d)$
Temperature $^{\circ}$ C	(-20 $^{\circ}$ C~400 $^{\circ}$ C) $\pm 1.0+5d$ (400 $^{\circ}$ C~1000 $^{\circ}$ C) $\pm 1.5+15d$	(-20 $^{\circ}$ C~400 $^{\circ}$ C) $\pm 1.0+50d$ (400 $^{\circ}$ C~1000 $^{\circ}$ C) $\pm 1.5+15d$
Temperature 0 $^{\circ}$ F~1832 $^{\circ}$ F	$\pm(1.0+5d)$ <750 $^{\circ}$ F $\pm(1.5+5d)$ $\geq$ 750 $^{\circ}$ F	(0 $^{\circ}$ F~750 $^{\circ}$ F) $\pm(1.0+5d)$ (750 $^{\circ}$ F~1832 $^{\circ}$ F) $\pm(1.5+5d)$
Continuity with beeper	Y	Y
Diode test	Y	Y
Transistor test	N	Y
Analog bargraph	Y	Y
Backlight	Y	N
Display hold	Y	Y
USB/RS232 interface	mini USB	RS232
Automatic power off	Y	Y
Low battery indication	Y	Y
EN61010-1 CAT II/CAT III	CAT II 1000V	CAT II 1000V
Battery	1.5V AAA	1.5V AAA



Item # :MT-1280



Item # :MT-1270

Model Number	MT-1280	MT-1270
Model Name	Digital Multimeter	Digital Multimeter
Size (HxWxD)mm	175x93x55	175x88x38
Weight (g)	400	318
Counts	1999	1999
Digits	3 1/2	3 1/2
Auto/Manual ranging	Manual	Manual
DC Voltage	200mV/2V/20V/200V $\pm(0.5\%+3d)$ 1000V $\pm(0.8\%+10d)$	200mV/2V/20V/200V $\pm(0.5\%+3d)$ 1000V $\pm(0.8\%+10d)$
AC Voltage	2V/20V/200V $\pm(0.8\%+5d)$ 750V $\pm(1.2\%+10d)$	2V/20V/200V $\pm(0.8\%+5d)$ 750V $\pm(1.2\%+10d)$
DC Current	200 μ A/20mA $\pm(0.8\%+10d)$ 200mA $\pm(1.2\%+8d)$	2mA/20mA $\pm(0.8\%+10d)$ 200mA $\pm(1.2\%+8d)$ 10A $\pm(2.0\%+5d)$
AC Current	20A $\pm(2.0\%+5d)$ 20mA $\pm(1.0\%+5d)$ 200mA $\pm(2.0\%+5d)$	2mA $\pm(1.0\%+15d)$ 200mA $\pm(2.0\%+5d)$ 10A $\pm(3.0\%+10d)$
Resistance	200 Ω $\pm(0.8\%+5d)$ 2/20/200K Ω $\pm(0.8\%+3d)$ 20M Ω $\pm(1.0\%+25d)$	200 Ω $\pm(0.8\%+5d)$ 2/20/200K/2M Ω $\pm(0.8\%+3d)$ 20M Ω $\pm(1.0\%+25d)$ 200M Ω $\pm[5\%(\text{reading}-10)+30d]$
Frequency	None	2KHz $\pm(3.0\%+18d)$ 200KHz $\pm(3.0\%+18d)$
Capacitance	20nF $\pm(2.5\%+20d)$ 20 μ F $\pm(2.5\%+20d)$ 200 μ F $\pm(5.0\%+20d)$	20nF $\pm(2.5\%+20d)$ 20 μ F $\pm(2.5\%+20d)$ 200 μ F $\pm(5.0\%+10d)$
Temperature $^{\circ}$ C	(-20 $^{\circ}$ C~1000 $^{\circ}$ C) $<400 \pm(1.0+5d)$ (-20 $^{\circ}$ C~1000 $^{\circ}$ C) $\geq 400 \pm(1.5+15d)$	(-20 $^{\circ}$ C~1000 $^{\circ}$ C) $<400 \pm(1.0+5d)$ (-20 $^{\circ}$ C~1000 $^{\circ}$ C) $\geq 400 \pm(1.5+15d)$
Temperature $^{\circ}$ F-1832 $^{\circ}$ F	None	None
Continuity with beeper	Y	Y
Diode test	Y	Y
Transistor test	Y	N
Analog bargraph	N	N
Backlight	N	N
Display hold	N	Y
USB/RS232 interface	N	N
Automatic power off	Y	Y
Low battery indication	Y	Y
EN61010-1 CAT II/CAT III	CAT II 1000V	CAT II 1000V
Battery	9V(6F22)	9V(6F22)



Item # :MT-1232



Item # :MT-1210


Model Number	MT-1232	MT-1210
Model Name	Digital Multimeter	Multimeter
Size (HxWxD)mm	145x74x36	144x70x32
Weight (g)	190	175
Counts	3999	1999
Digits	3 3/4	3 1/2
Auto/Manual ranging	Both	Manual
DC Voltage	400mV/4V/40V/400V $\pm(0.5\%+4d)$ 600V $\pm(1.0\%+4d)$	200mV $\pm(1.0\%+2d)$ 2/20/200V $\pm(1.0\%+2d)$ 500V $\pm(1.2\%+5d)$
AC Voltage	4V/40V/400V $\pm(0.8\%+6d)$ 600V $\pm(1.0\%+6d)$	200V $\pm(2.5\%+10d)$ 500V $\pm(2.5\%+10d)$
DC Current	400 μ A/4000 μ A $\pm(1.0\%+10d)$ 40mA/400mA $\pm(1.0\%+10d)$ 10A $\pm(1.2\%+10d)$	200 μ A $\pm(2.0\%+5d)$ 2mA/20mA/200mA $\pm(2.0\%+5d)$ 10A $\pm(3.0\%+5d)$
AC Current	400 μ A/4000 μ A $\pm(1.5\%+10d)$ 40mA/400mA $\pm(1.5\%+10d)$ 10A $\pm(2.5\%+15d)$	None
Resistance	400 Ω $\pm(0.8\%+5d)$ 4/40/400K/4M Ω $\pm(0.8\%+4d)$ 40M Ω $\pm(1.2\%+10d)$	200 Ω $\pm(1.0\%+5d)$ 2K/20K/200K Ω $\pm(1.0\%+5d)$ 2M Ω $\pm(1.5\%+5d)$
Frequency	1/10/100Hz $\pm(0.5\%+10d)$ 1K/10K/100KHz $\pm(0.5\%+10d)$ 1/10MHz $\pm(0.5\%+10d)$	None
Capacitance	4nF $\pm(0.5\%+90d)$ 40nF/400nF/4 μ F/40 μ F $\pm(3.5\%+8d)$ 100 μ F $\pm(5.0\%+8d)$	None
Temperature °C	(-20°C~1000°C) <400 $\pm(1.0+5d)$ (-20°C~1000°C) $\geq 400 \pm(1.5+15d)$	None
Continuity with beeper	Y	Y
Diode test	Y	Y
Transistor test	N	Y
Analog bargraph	N	N
Backlight	N	Y
Display hold	Y	Y
USB/RS232 interface	N	N
Automatic power off	Y	N
Low battery indication	Y	Y
EN61010-1 CAT II/CAT III	CAT II 1000V	CAT II 600V
Battery	1.5V AAA	9V(6F22)

Tool Case

Compare with Hi-Grade, US-manufactured bags

Combo Tool and Attache Bag (Water Repellent)

- Constructed of water repellent 1680D polyester nylon
- Enhanced rivet-fixed tool pockets
- Double sided design
- Strong, heavy-duty zipper
- With shoulder strap
- Additional external pockets
- Size: 18-1/4" x 13-1/4" x 6-1/2"



Water repellent



New

Description	Part No.
Combo Tool and Attache Bag (Water Repellent)	902-689ZT

Master Telecom Tool Bag (Water Repellent)

- Constructed of water repellent 1680D polyester nylon
- Enhanced rivet-fixed tool pockets
- Strong, heavy-duty zipper
- With shoulder strap
- Additional external pockets
- Size: 15-3/4" x 13-1/2" x 3-1/2"



Water repellent




New

Description	Part No.
Master Telecom Tool Bag (Water Repellent)	902-685ZT

2009 NEW PRODUCTS

Master Technician Tool Bag (Water Repellent)

- Constructed of water repellent 1680D polyester nylon
- Enhanced rivet-fixed tool pockets
- Strong, heavy-duty zipper
- With shoulder strap
- Additional external pockets
- Size: 15-1/2" x 11-1/4" x 3"




Water repellent



Description	Part No.
Master Technician Tool Bag (Water Repellent)	902-669ZT

Trouble-Shooter Tool Bag (Water Repellent)

- Constructed of water repellent 1680D polyester nylon
- Enhanced rivet-fixed tool pockets
- Strong, heavy-duty zipper
- Additional external pockets
- Size: 13-1/4" x 10-3/4" x 3"



Water repellent



Description	Part No.
Trouble-Shooter Tool Bag (Water Repellent)	902-660ZT

Master Tool Belt

- Made of 600D polyester
- Leather waist belt with 13 adjustment holes (from 32" to 44")
- With roller metal double-tongue buckle
- With multi-pocket for versatility



Tools not included



Description	Part No.
Master Tool Belt	902-311

4 Pocket Pouch

- Made of 600D polyester
- 3 net pockets for light tools
- Ideal for packing pliers with a padded & reinforced pouch design




Tools not included



Description	Part No.
4 Pocket Pouch	902-312

10 Pocket Tool Pouch

- Made of 600D polyester
- 4 main pockets for tools and nails
- small pockets for accessories
- 2 steel loops



Tools not included



Description	Part No.
10 Pocket Tool Pouch	902-313


25 Pocket Electrical & Maintenance Tool Carrier

- Made of 600D polyester
- With a padded carrying handle
- With multi-pocket for versatility
- A space in the bottom for storage box

New



Square design enables firmly standing



Tools not included



Description	Part No.
25 Pocket Electrical & Maintenance Tool Carrier	902-314

Steel Tube Tool Carrier

- Made of 600D polyester
- Durable and stainless handle
- An adjustable shoulder strap provided
- With multi-pocket for versatility

New



With 3 removable pouches and 1 shoulder strap



Description	Part No.
Steel Tube Tool Carrier	902-315



Tools not included

Cable Ties

Hook And Loop Cable Tie

Features

- Spiral wrap at cable organizer
- Organize messy cables in just about any setting
- Easily rearrange cable and keep cables neatly and safely out of your way.



Rearrange and organize messy cable

3/4" Wide-meets BISC spec

Description	Part No.
Hook And Loop Cable Tie (50 Feet Long-3/4" Wide)	902-305

New



Wire Installation

All In One Cable Tacker

Features

- All-in-one staple gun can be utilized in tacking flat cable or round cable
- Easy-to-change construction allows users to change the staple-guide-plates easily
- With spare replacement staples for future use
- Light weight ABS materials with dual color design

Specification

- Materials: ABS(Main Body)



ALL IN ONE CABLE TACKER can solve all works for different kinds of round cable and flat wire.
Easy way to change different staple guide plates to match different works for round cable and flat wire.

New



Item #: CP-391

Interchangeable heads



Press the staple feeder downward and remove from its channel.




Load a strip of staples into the channel.




Slide in the staple feeder and push it upward to its locked position.

Description	Part No.
All In One Cable Tacker	CP-391
Cable Staples (8.0mm)	CP-391-1
Cable Staples (10.3mm)	CP-391-2



Item #: CP-391-1

New




Item #: CP-391-2

New

Fiberglass Push/pull Rod Set (10 Pcs/set)

Features

- Ideal for running multi-purpose cable in hard-to-reach area such as behind walls, up through crawl spaces, and under floors.
- 10 pcs, 4 feet each
- Diameter 5mm±0.2mm (13/64"±0.008")

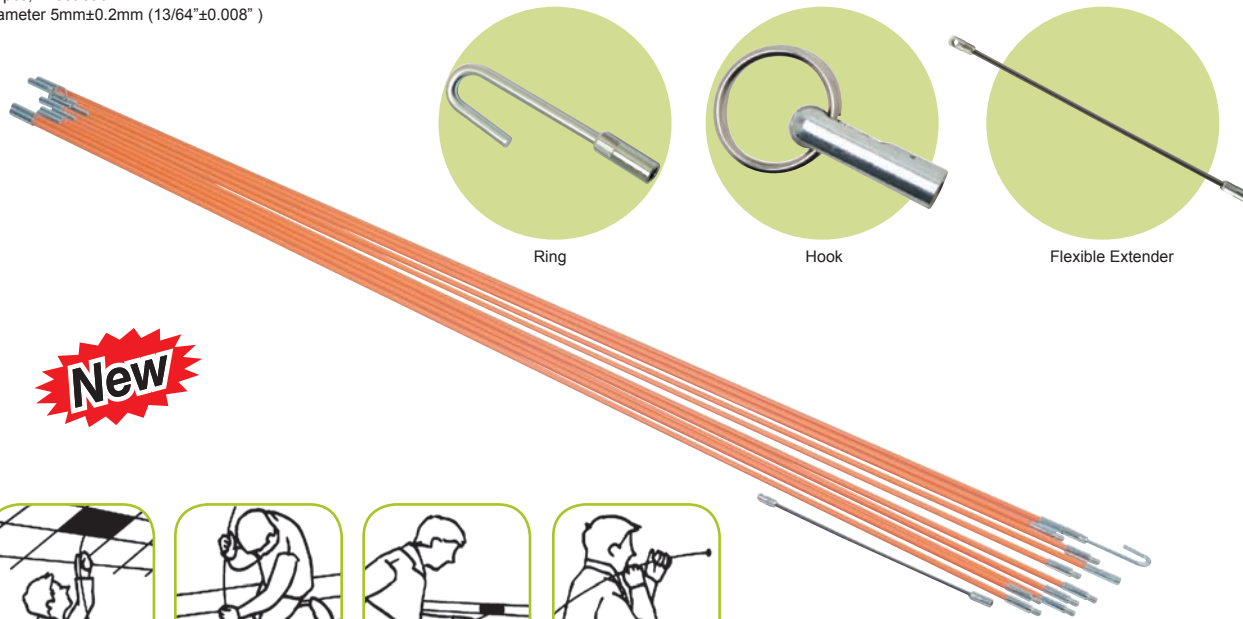

Ring

Hook

Flexible Extender



Ceiling ducts



Under floorboards



Trunking



Wall cavities


Description	Part No.
Fiberglass Push/pull Rod Set (10 Pcs/set)	902-302

Electrical Products

9pc Bi-metal Hole Saw

Features

- Hole saw sizes: 7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
- Contents: 6 hole saws, 2 pilot drill arbors and 1 hex key

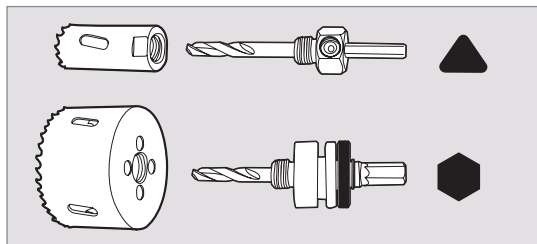

Description	Part No.
9pc Bi-metal Hole Saw	902-309