



2GRE25 140x59R

Z10-13 p

Replace Q07-12 p



DATA SHEET

release. f - Revision 03-2016

Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
230	50	174	0,78	4,0	540	2270	65	R	-20°C / +70°C
230	60	216	0,94	4,0	495	2100	63	R	-20°C / +50°C
230	50				317 CFM				-4°F / 158°F
230	60				291 CFM				-4°F / 122°F



dBA : free blowing



NA : not applicable

ErP 2013

NA

ErP 2015


NA

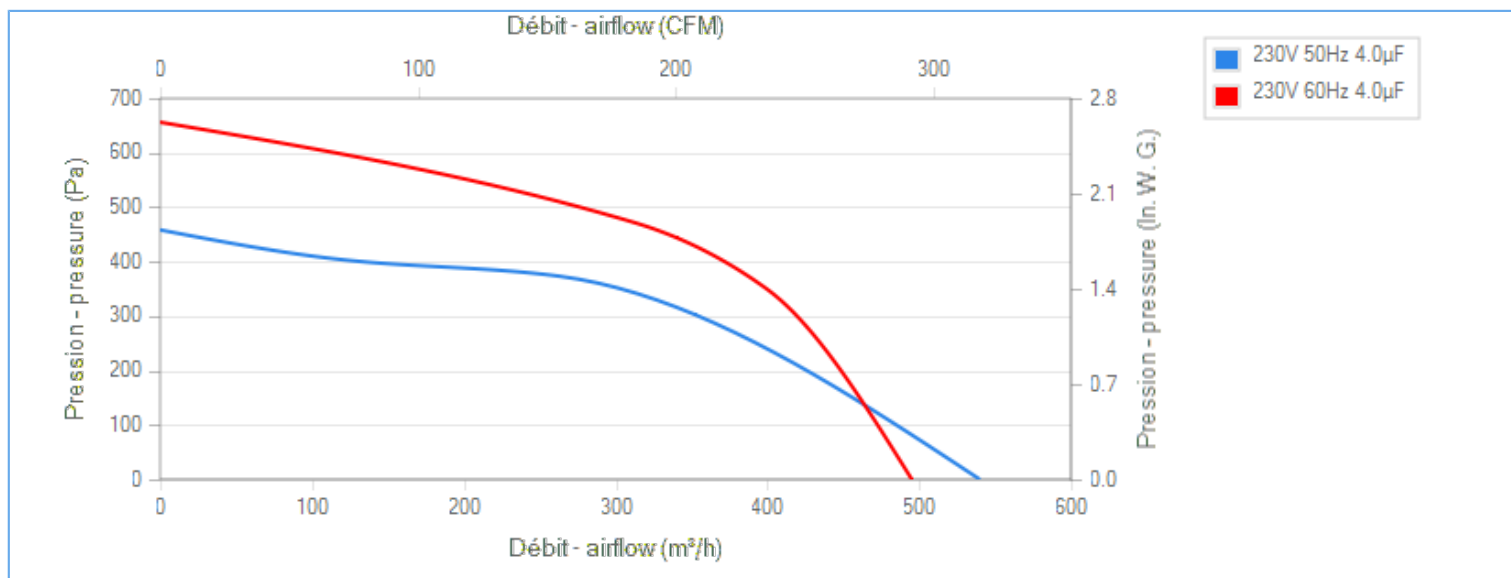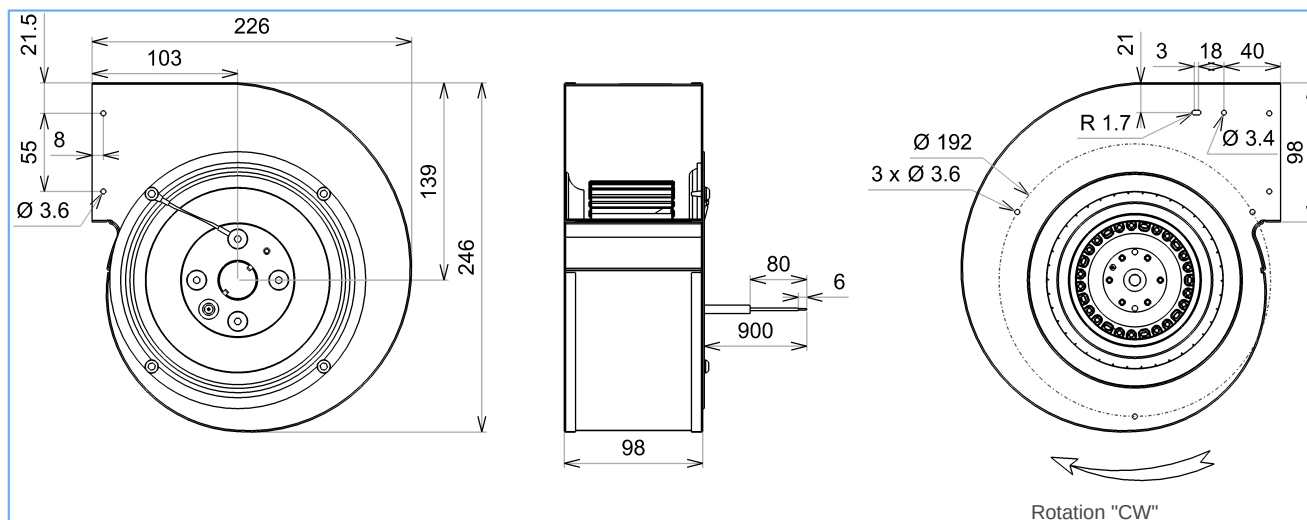

Description

- .Weight : 2,9 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Galvanized steel impeller
- .Rotor : black paint
- .Scroll housing : black paint

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow





2GRE25 140x59R

Z10-13 p

Replace Q07-12 p

DATA SHEET

release. f - Revision 03-2016



Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,109	kW ⁽¹⁾
Airflow	263	m ³ /h ⁽¹⁾
Pressure	373	Pa ⁽¹⁾
Rotation speed	2714	RPM ⁽¹⁾
(1) at optimal efficiency point		

ErP directive (EU 2009/125/EC) not applicable :
Power at optimum energy efficiency point

Accessories

19019
19019
21325

Measurement setup

Contact ECOFIT

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes



A041865
2RS925CN

