

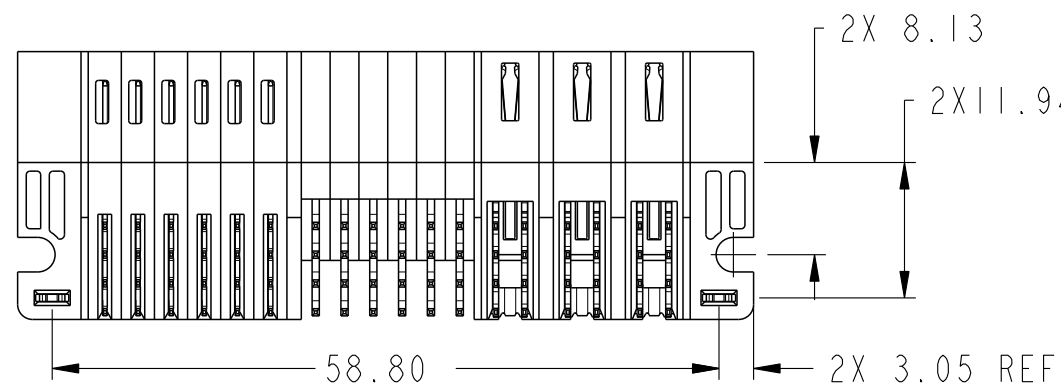
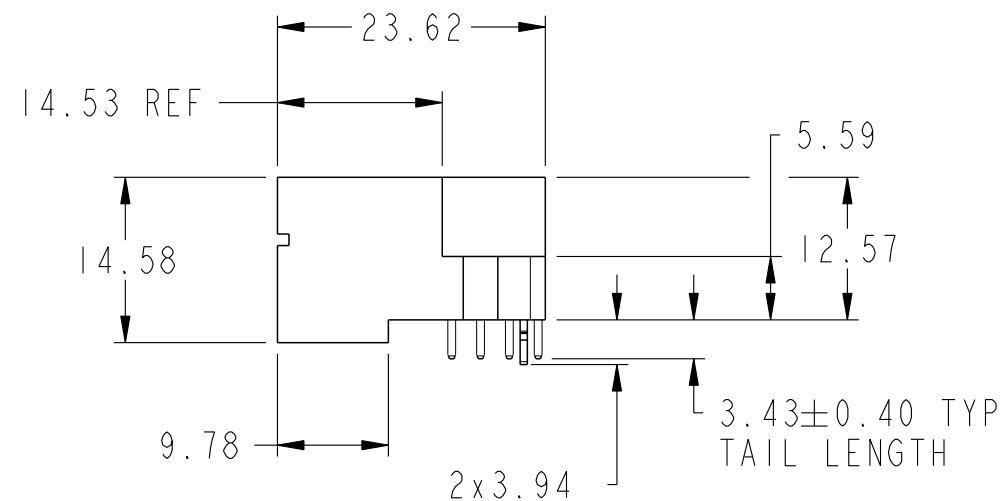


PRODUCT NUMBER SEE SHEET 2

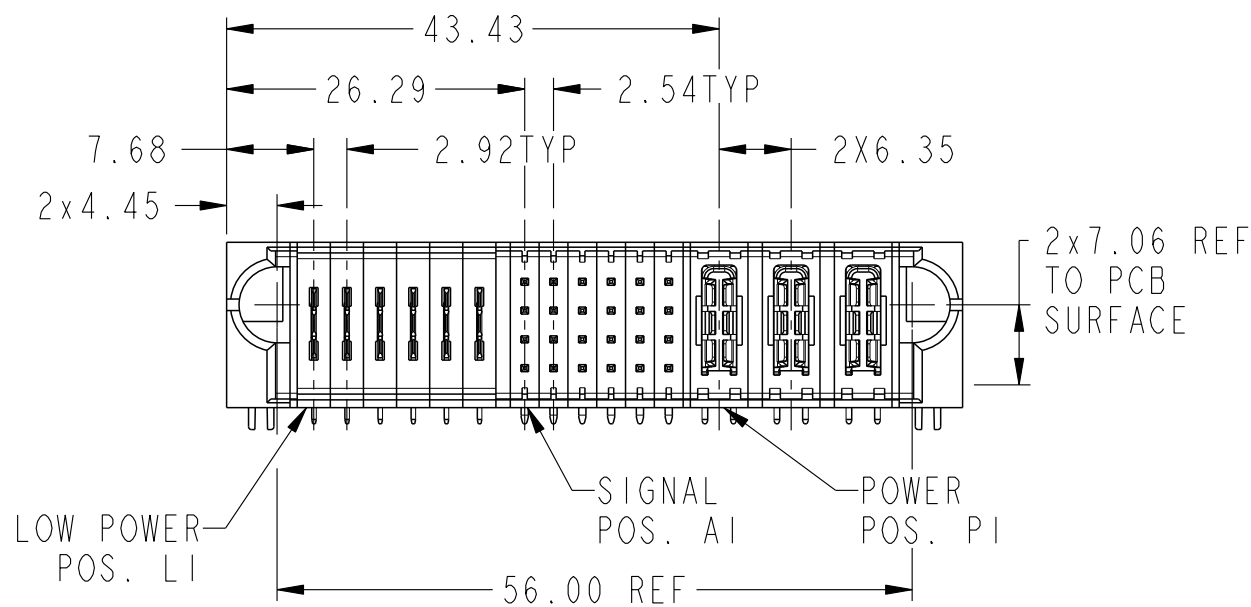

spec ref *				dr		Zhen-Hua Liu	2015/05/10		projection		MM		size		A3		scale		3:2												
tolerance std				TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Zhen-Hua Liu		2015/10/13						ecn no				-									
ASME Y14.5								chr		Fancy Zhang		2015/10/13						rel level				Released									
								appr		Pei-Ming Zheng		2015/10/13						product family				PwrBlade+									
surface		✓		linear		0.X		±0.5				title		6LP + 24S + 3HP						dwg no		10106262-3606002						rev		A	
				0.XX		±0.25																									
				0.XXX		±0.10																									
ASME Y14.5				angular		0°		±2°		www.fci.com		cat. no.				Product - Customer Drw						sheet 1 of 3									

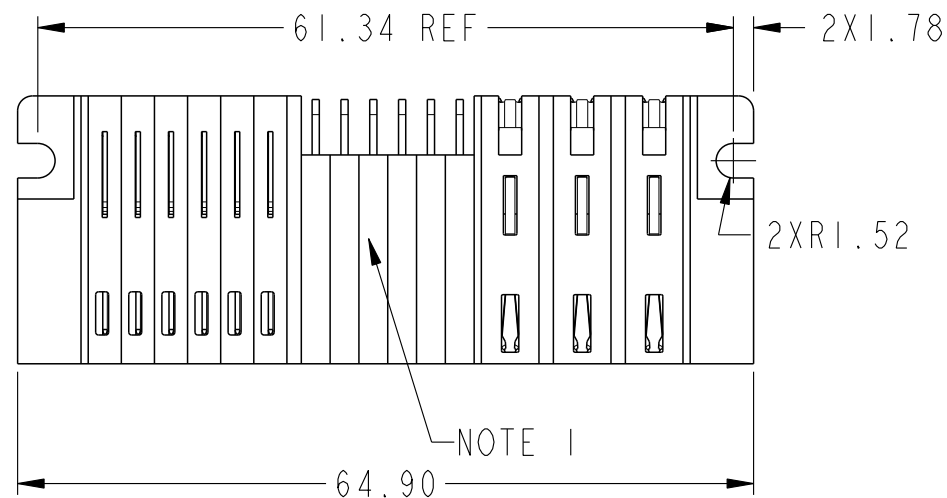


Copyright FCI.

CODE	DESCRIPTION
F	MLBF SIGNAL CONTACT, ROW B (3.43)
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
LK	STD LOW POWER CONTACT (3.43)
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

dr	Zhen-Hua Liu	2015/05/10	projection	MM	size	A3	scale	3:2
eng	Zhen-Hua Liu	2015/10/13			ecn no	-		
chr	Fancy Zhang	2015/10/13			rel level	Released		
appr	Pei-Ming Zheng	2015/10/13	product family		PwrBlade+			
			title			6LP + 24S + 3HP		rev
			RA STB HEADER			dwg no		10106262-3606002
www.fci.com			cat. no.			Product - Customer Drw		sheet 2 of 3
						A		

CODE	DESCRIPTION
F	MLBF SIGNAL CONTACT, ROW B (3.43)
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
LK	STD LOW POWER CONTACT (3.43)
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

PRODUCT NO.	ROWS		LP						SIGNAL						H P						
		E1	P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	E2			
10106262-3606002LF	DCBA		L	K	L	K	L	K	L	K	L	U	U	U	U	U	U	H1	H1	H1	
												T	T	T	T	T					
												S	S	F	S	S	S				
												R	R	R	R	R	R				

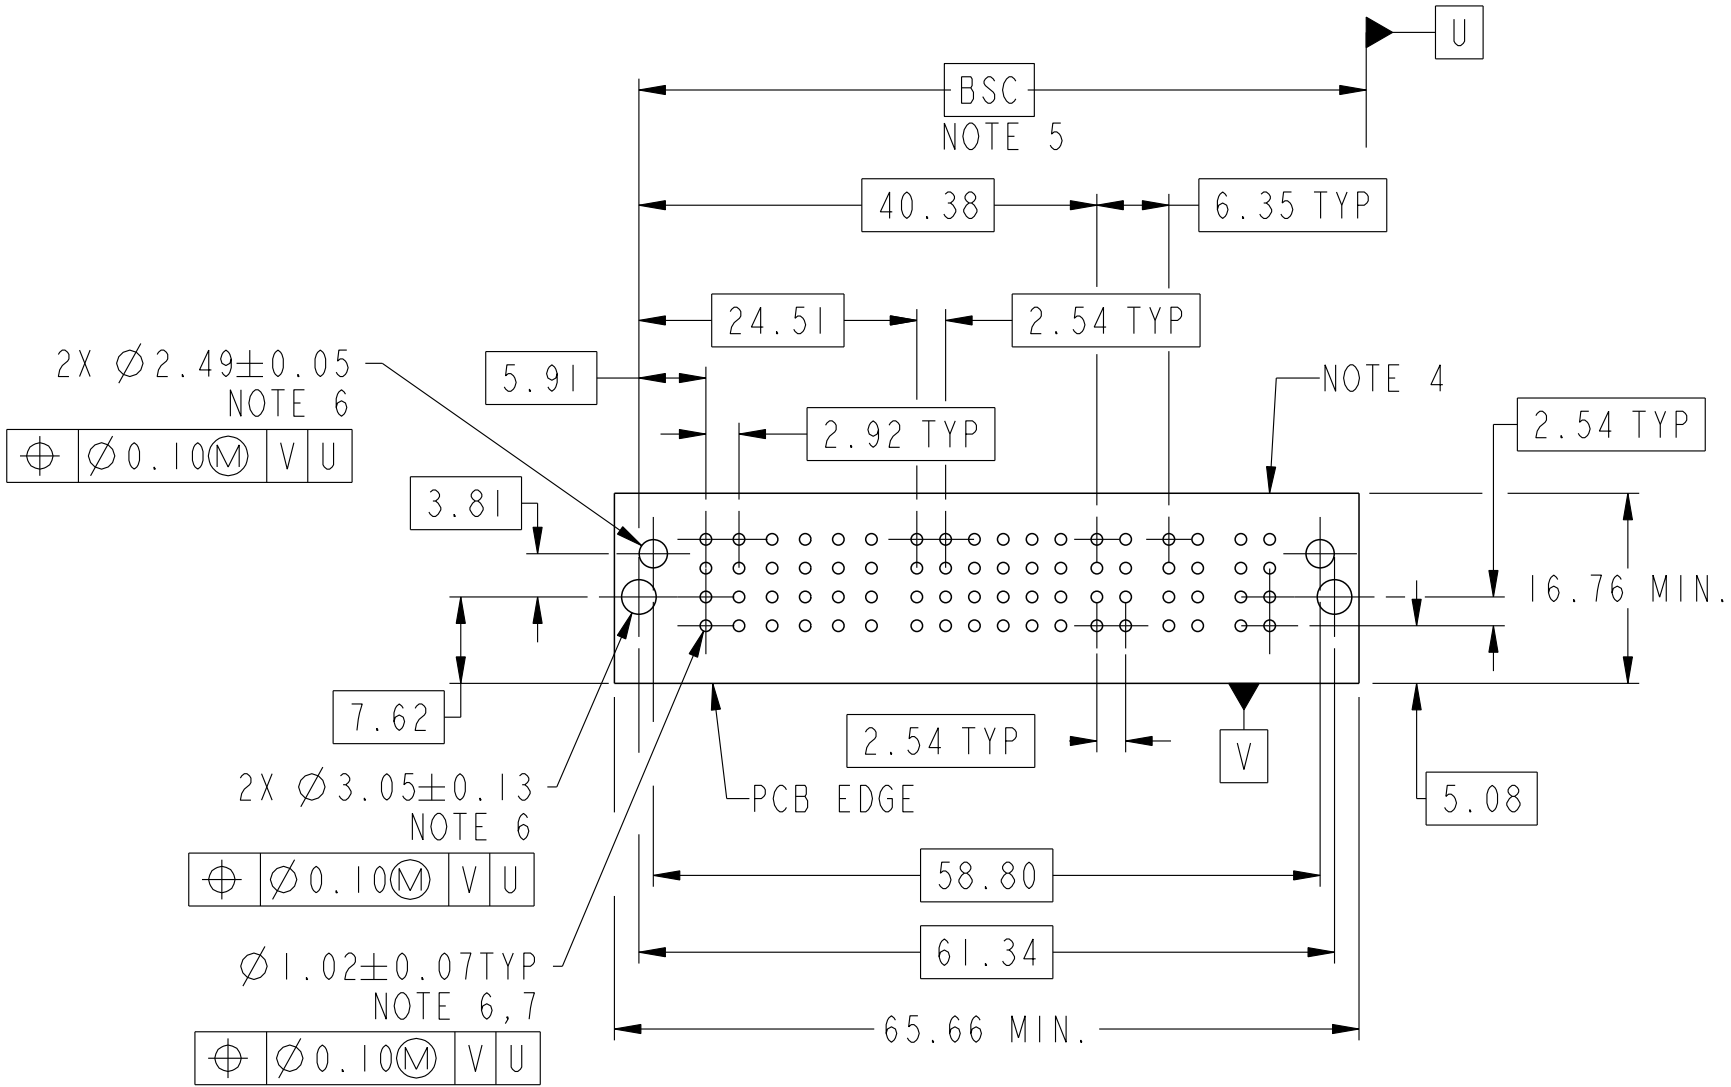

A

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

B

C

D



Copyright FCI.

dr	Zhen-Hua Liu	2015/05/10	projection	MM	size	A3	scale	3:2
eng	Zhen-Hua Liu	2015/10/13			ecn no	-		
chr	Fancy Zhang	2015/10/13			rel level	Released		
appr	Pei-Ming Zheng	2015/10/13	product family		PwrBlade+			
	title	6LP + 24S + 3HP RA STB HEADER			dwg no	10106262-3606002		rev
www.fci.com	cat. no.	Product - Customer Drw				sheet 3 of 3		A