В

C

CAT. NO. & DIMENSIONS

NOTE3	NO. OF CONTACTS	CAT. NO.	DIME	NSIONS (N	OTE2)
NOILS	(n)	0,1,1,1,0,1	A ±0.2	B±0.2	C±0.2
	4	SFW4S-2STLF	10.4	5.24	3
	5	SFW5S-2STLF	11.4	6.24	4
	6	SFW6S-2STLF	12.4	7.24	5
*	7	SFW7S-2STLF	13.4	8.24	6
	8	SFW8S-2STLF	14.4	9.24	7
*	9	SFW9S-2STLF	15.4	10.24	8
	10	SFW10S-2STLF	16.4	11.24	9
	11	SFW11S-2STLF	17.4	12.24	10
*	12	SFW12S-2STLF	18.4	13.24	11
	13	SFW13S-2STLF	19.4	14.24	12
	14	SFW14S-2STLF	20.4	15.24	13
	15	SFW15S-2STLF	21.4	16.24	14
	16	SFW16S-2STLF	22.4	17.24	15
	17	SFW17S-2STLF	23.4	18.24	16
*	18	SFW18S-2STLF	24.4	19.24	17
*	19	SFW19S-2STLF	25.4	20.24	18
	20	SFW20S-2STLF	26.4	21.24	19
*	21	SFW21S-2STLF	27.4	22.24	20
	22	SFW22S-2STLF	28.4	23.24	21
	23	SFW23S-2STLF	29.4	24.24	22
	24	SFW24S-2STLF	30.4	25.24	23
*	25	SFW25S-2STLF	31.4	26.24	24
	26	SFW26S-2STLF	32.4	27.24	25
*	27	SFW27S-2STLF	33.4	28.24	26
	28	SFW28S-2STLF	34.4	29.24	27
	29	SFW29S-2STLF	35.4	30.24	28
	30	SFW30S-2STLF	36.4	31.24	29
*	31	SFW31S-2STLF	37.4	32.24	30
*	32	SFW32S-2STLF	38.4	33.24	31

CAT. NO. SFW (n) S - 2 ST - LF**SERIES** NO. OF CONTACTS STRAIGHT TYPE FOR FPC / FFC VARIATION STM: FOR AUTOMATIC MOUNTING (SMT) WITH MOUNTING PLATE ST: FOR AUTOMATIC MOUNTING (SMT) WITHOUT MOUNTING PLATE PACKAGE STYLE LEAD FREE -

Α

NOTES

- 1. THIS PRODUCT IS THE CONNECTOR, DESIGNED TO TREMINATE FPC/FFC AND COPES WITH AUTOMATIC MOUNTING (SMT).
- 2. SEE PART DRAWINGS FOR DIMENSIONS A.B.C.
- 3. PLEASE CONSULT US IN CASE OF USING PARTS WITH * MARK

ma	t'l. cod	de			ırfac O 130	ce ₅₈ /	tole ISC ISC		Э	pro.	,	ion 1	pro	duct	: fai	mily		58S	F	1 '	ODE JP
ltr	ecn n	o dr	date	to	leran	ces unl other	ess wise	specif	fied	4	フト	コ	title	,	~	NO	TAD		.OD		
Α	J05-0377	H.T	2005-6-	22	gles			•			mm) 1mm	JAI. SE	NO. ACIN	TAB G SI		CONN	FCTC)R
В	J05-0547	н.т	2005-8-	30	igica	linear											VS				,,,
С	J06-0430	H.T	2006-10-	-19						sca	le	χ		- (JAI.IN	0.37	v	-231		<i>)</i>	
D	J07-0407	H.T	2007-8-	9 dr		l-arbeit	rita.	2007-8	2-9				dwg	no			s	heet	t 1 c	of 1	size
				en	gr	f-taka		2007-8			C	, 🗓				.154	96	516			\ \ \
				ch	ir 🔏	Shi	rtejic'	2007-8	19-			7				00/1	<u> </u>				A4
				ар	pd 🕦	audas	w	200 7	P-N	L	0		type	e P	rodu	ct C	usto	mer	Drav	ving	
she	et re	vision	D																		Rev
inde	ex sh	neet	1																		D

PDM: Rev:D


SC-SFWS 03 JSA96517 96518 96519 96520 93340 93341 form: A4

STATUS: Released


Printed: May 28, 2009

С

Copyright FCI.

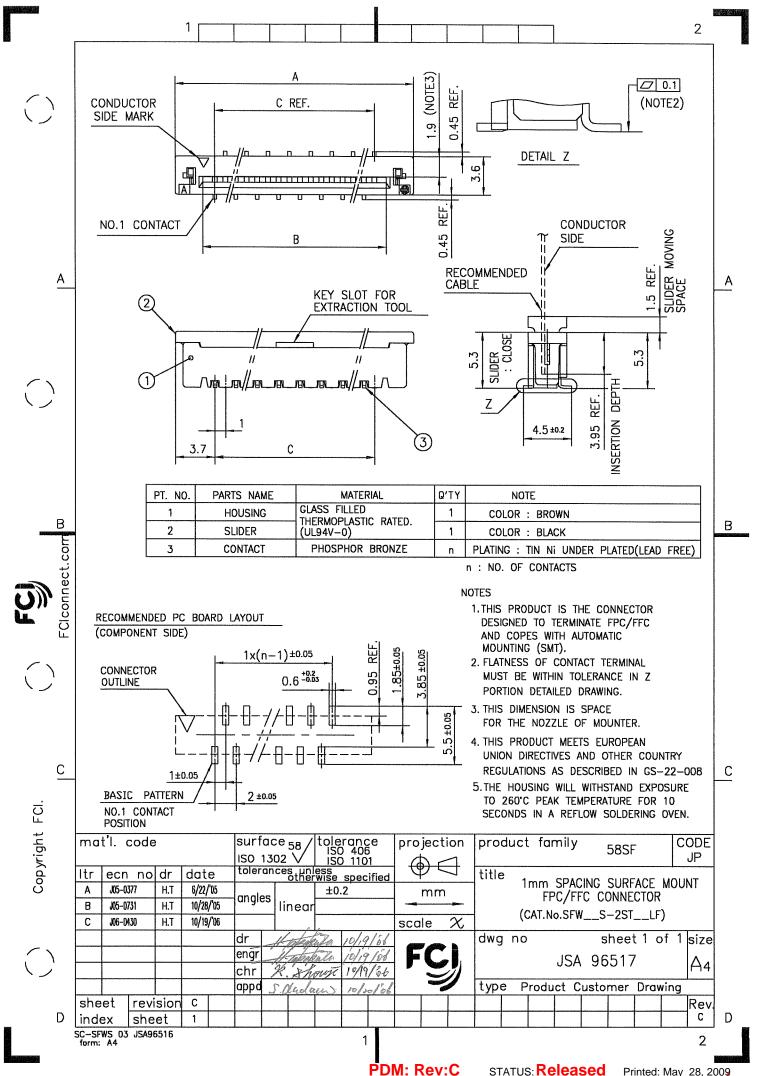

STATUS: Released Printed: May 28, 2009

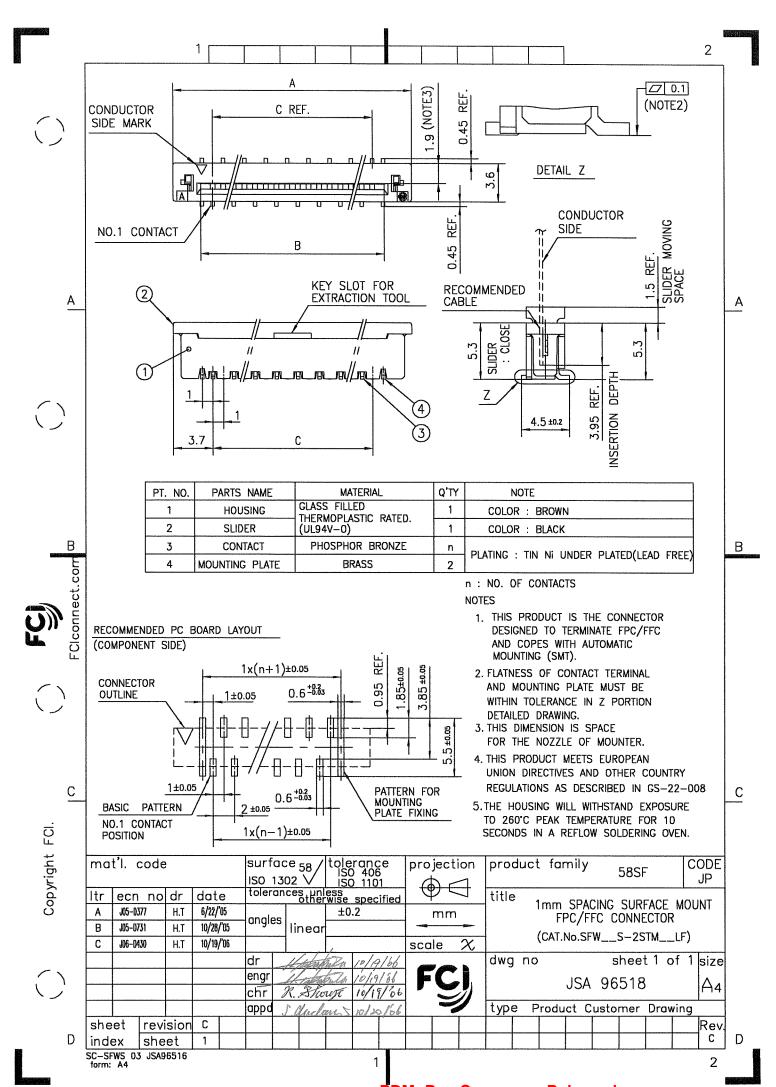

PDM: Rev:C STATUS: Released Printed: May 28, 2009

Α

В

C

CAT. NO. & DIMENSIONS

(NOTE4)	NO. OF CONTACTS	CAT. NO.	DIME	VSIONS (NOTE3)
(110127)	(n)	(NOTE2)	D MAX.	E ± 0.3	F ± 0.1
	4	SFW4S-2ST_E9LF	30.4	24	<u></u>
	5	SFW5S-2ST_E9LF	30.4	24	
	6	SFW6S-2ST_E9LF	30.4	24	
*	7	SFW7S-2ST_E9LF	30.4	24	
	8	SFW8S-2ST_E9LF	30.4	24	
*	9	SFW9S-2ST_E9LF	30.4	24	. ——
	10	SFW10S-2ST_E9LF	30.4	24	
	11	SFW11S-2ST_E9LF	30.4	24	
*	12	SFW12S-2ST_E9LF	38.4	32	28.4
	13	SFW13S-2ST_E9LF	38.4	32	28.4
	14	SFW14S-2ST_E9LF	38.4	32	28.4
	15	SFW15S-2ST_E9LF	38.4	32	28.4
	16	SFW16S-2ST_E9LF	50.4	44	40.4
	17	SFW17S-2ST_E9LF	50.4	44	40.4
*	18	SFW18S-2ST_E9LF	50.4	44	40.4
*	19	SFW19S-2ST_E9LF	50.4	44	40.4
	20	SFW20S-2ST_E9LF	50.4	44	40.4
*	21	SFW21S-2ST_E9LF	50.4	44	40.4
	22	SFW22S-2ST_E9LF	50.4	44	40.4
	23	SFW23S-2ST_E9LF	50.4	44	40.4
	24	SFW24S-2ST_E9LF	50.4	44	40.4
*	25	SFW25S-2ST_E9LF	50.4	44	40.4
	26	SFW26S-2ST_E9LF	50.4	44	40.4
*	27	SFW27S-2ST_E9LF	62.4	56	52.4
	28	SFW28S-2ST_E9LF	62.4	56	52.4
	29	SFW29S-2ST_E9LF	62.4	56	52.4
	30	SFW30S-2ST_E9LF	62.4	56	52.4
*	31	SFW31S-2ST_E9LF	62.4	56	52.4
*	32	SFW32S-2ST_E9LF	62.4	56	52.4
			L		

CAT. NO. SFW (n) S - 2 ST_ -- LF SERIES NO. OF CONTACTS STRAIGHT TYPE FOR FPC / FFC VARIATION STM:FOR AUTOMATIC MOUNTING (SMT) WITH MOUNTING PLATE ST:FOR AUTOMATIC MOUNTING (SMT) WITHOUT MOUNTING PLATE PACKAGE STYLE LEAD FREE **NOTES**

- 1. THIS PRODUCT IS THE CONNECTOR DESIGNED TO TERMINATE FPC/FFC AND COPES WITH AUTOMATIC MOUNTING (SMT).
- 2. THIS CATALOG NO. INDICATES PLASTIC TAPE PACKAGED CONNECTOR.
- 3. SEE PART DRAWINGS FOR DIMENSIONS D~F.
- 4. PLEASE CONSULT US IN CASE OF USING PARTS WITH * MARK.

П	nat	l. co	ode				surf ISO	ace 1302	58	/tole			pro	jectio	nc 1	proc	luct	fam	ily		58Sf	-	0	JP
Ţ	tr	ecn	ΠO	dr	dat	e	toler	ance	s un	less rwise	speci	fied	7	クト	J	title					-			
	A	J09-02	02	M.Y	2009-	-5-25	angle	25		ļ				mm						E FO m Sf				1
-								'	inea	η			sca	e	$\frac{1}{\chi}$	'				W) I I I I
					***************************************		dr	H.SH	HASHI	7A	2009	5-25		w 4895	<u> </u>	dwg	חס			S	heet	1 c	of 1	size
							engr chr	<u> </u>	MAHI A ZAZ	A.	2009-	5-25 5-25		C					JSA	97	7526	3		A4
-							appd	S. 1	<u>tir Vil</u> Uir Sa	<u>sserel</u>	2007-		7			type	. P	rodu	ct C	usto	mer	Drav	wing	
s	he	2†	revi	sion	Α			 				T												Rev.
li	nde	х	she	et	1																			A
	-SFWS	03 JS. A4	A97525	97527							•	1												2


STATUS: Released Printed: May 28, 2009

Copyright FCI.

Α

D

PDM: Rev:A

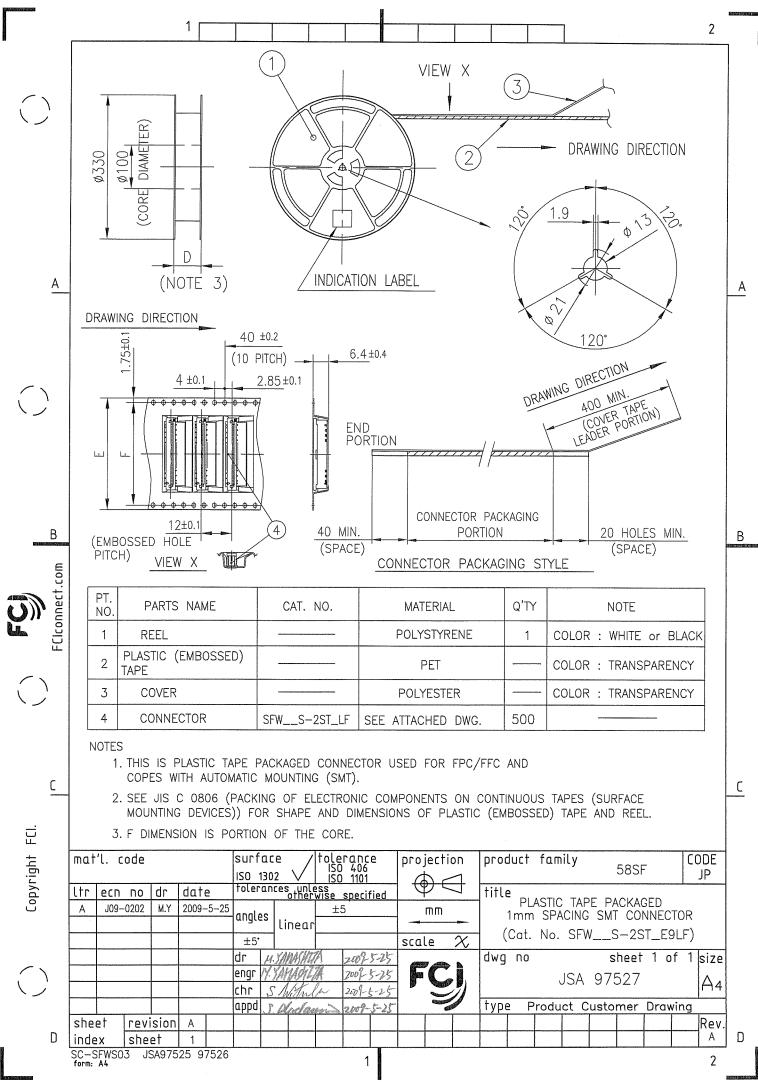

PDM: Rev:A STATUS: Released Printed: May 28, 2009




<u>A</u>


В

С

D



n: NO. OF CONDUCTORS

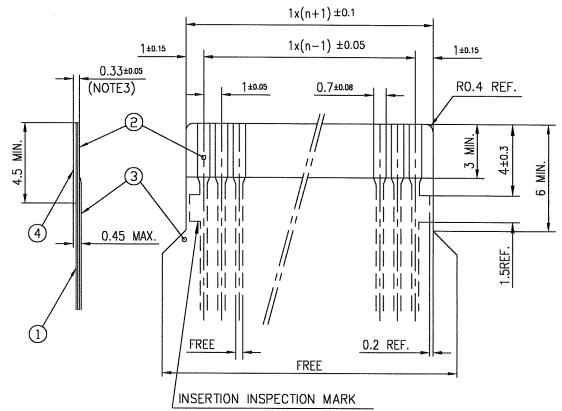

ALC: UNIVERSE	and the same
	Ĕ
	ŭ
	Ct
	ĕ
(C)))'	n
	ပ္ပ
	$\overline{\circ}$
	ட

Copyright FCI.

В

Α

PT. NO.	DESCRIPTION	MATERIAL	THICKNESS (μm)
1	BASE FILM	POLYIMIDE OR POLYESTER OR EQUIVALENT	25
2	CONDUCTOR	COPPER FOIL(PLATING : SOLDER 1 mm MIN.)	35
3	OVERLAY	POLYIMIDE OR POLYESTER OR EQUIVALENT	
4	SUPPORTING TAPE	POLYESTER OR POLYIMIDE OR EQUIVALENT	188

NOTES

- 1. NO BURR AT EACH PORTION.
- 2. NO PEELING IN COMMON USE.
- 3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

ma	t'l. code)		ISO 1		toleran ISO 40 ISO 11	01	oject	ion 1	proc	luct f	amily		58S	F	COD
ltr	ecn no	dr	date	tolero	nces un other	ess wise spe	cified	(() (\supset	title						
AA	JD4-0333	H.T	Oct.13,1	04				mm]	R	ECOM	MENE	DED (CABLE	<u> </u>
AB	J06-0430	H.T	10/19/	angle	linear						(CA	T.No.S	FW	5-29	ST	١
							S	cale	\propto		(0.		· · · ·		J	.,
				dr	11-000	ETCO 10/1	9/66			dwg	no		5	heet	t 1 of	f 1 siz
	***************************************			engr chr	2. 8h	Mathe 10/1	9/06	FC	7 3 1			JSA	93	340		A
				appd	S. Guda		rolol	Z		type	Proc	luct (Custo	mer	Drawi	
she	et rev	ision	AB													Re
inde	ex she	et	1													A

form: A4

D

PDM: Rev:AB

STATUS: Released

Printed: May 28, 2009



A


В

<u>C</u>

D

RECOMMENDED CABLE (FFC)

n: NO. OF CONDUCTORS

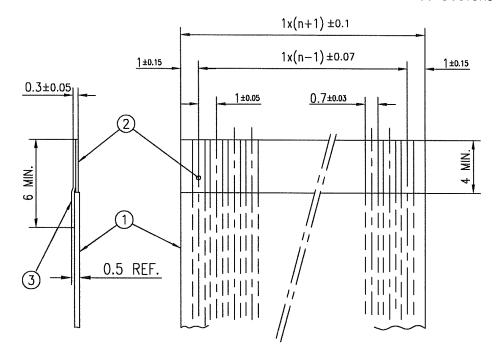



<u>A</u>



Copyright FCI.

PT. NO.	DESCRIPTION	MATERIAL	NOTE
1	INSULATOR	FLAME RESISTING POLYESTER OR EQUIVALENT	
2	CONDUCTOR	COPPER FOIL	PLATING: TIN OR SOLDER 1 µm MIN.
3	SUPPORTING TAPE	FLAME RESISTING POLYESTER OR EQUIVALENT	

NOTES

- 1. NO BURR AT EACH PORTION.
- 2. NO PEELING IN COMMON USE.

ma	t'l. cod	е			surfac	02 🗸	1S0	1101	е	proje	ectio	on 1	prod	duct	fa	mily		589	SF		ODE JP
ltr	ecn no	dr	date)	toleran	ces uni	ess Wise	speci	fied	4		J	title						***************************************	•	
AA	J04-0333	H.T	Oct.13,	D4	analor					n	٦m				REC	OMN	MEND	ED (CABL	E	
AB	J06-0430	H.T	10/19/	"06	angles	linear						-			(CAT	No 9	SFW	S-2	ST)	
						jā.	4			scale	9 ($\overline{\chi}$			(OA)	.140.0	/ II	_5 2	.51	_/	
					dr	Harka	Enter	10/19	168				dwg	no			5	shee	t 1 o	f 1	size
					engr / chr 2	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	tute.	10/19/		F						JSA	93	3341			Α4
		1				P. Olivet ai		10/20]			type	• P	rodu	ict C	Custo	mer	Draw	ing	<u></u>
she	et rev	isior	AB																		Rev.
inde	ex sh	eet	1																		AB

form: A4

D

STATUS: Released

Printed: May 28, 2009

PDM: Rev:AB