

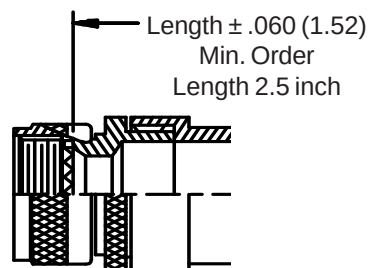
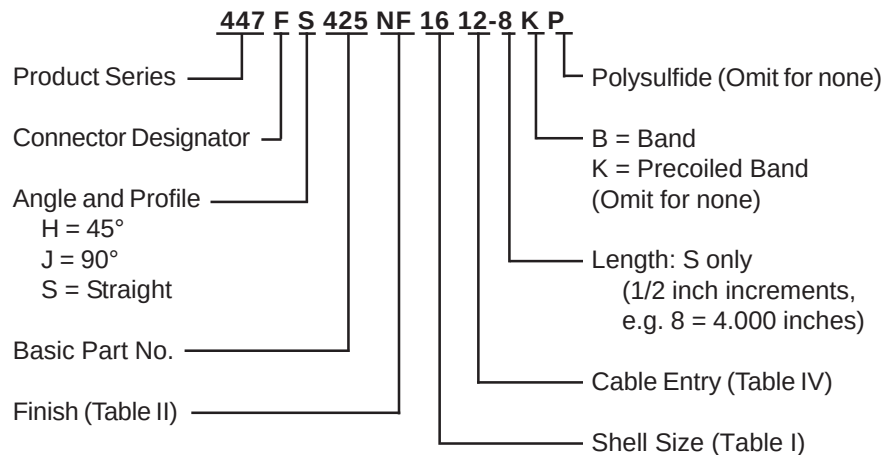


CONNECTOR DESIGNATORS A-F-H-L-S

ROTATABLE COUPLING





STYLE 2
(STRAIGHT
See Note 1)

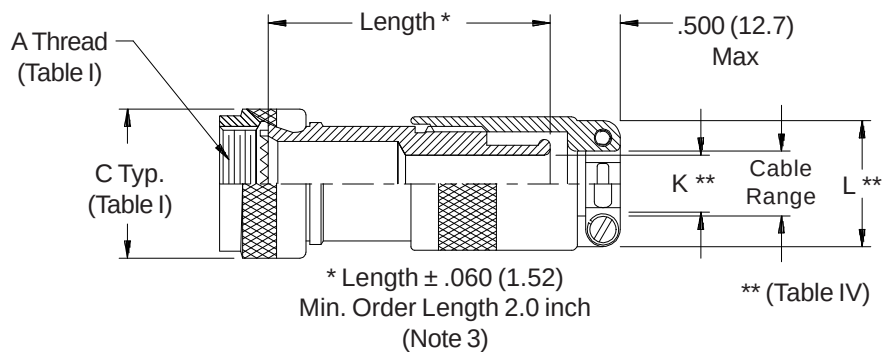

STYLE 2
(45° & 90°
See Note 1)



Termination Area
Nickel Plated
Knurl or Ridges
Mfr's Option

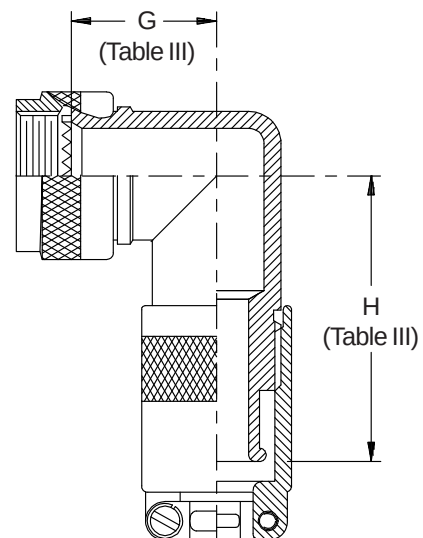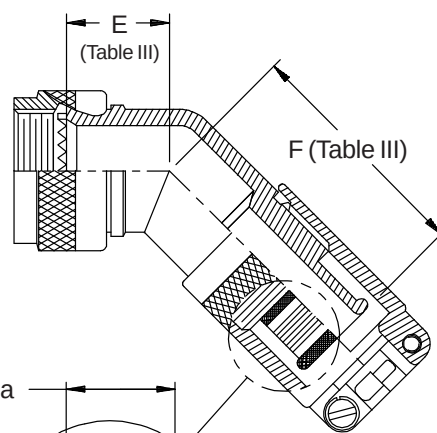

Polysulfide Stripes
P Option

See inside back cover fold-out or pages 13 and 14 for Tables I and II.

TABLE III: ELBOW DIMENSIONS

Shell Size Conn. Desig.		E Max		F Max		G Max		H Max	
A-F-L-S	H								
08	09	.639	(16.2)	1.380	(35.1)	.750	(19.1)	1.500	(38.1)
10	11	.664	(16.9)	1.410	(35.8)	.810	(20.6)	1.550	(39.4)
12	13	.688	(17.5)	1.430	(36.3)	.870	(22.1)	1.610	(40.9)
14	15	.705	(17.9)	1.460	(37.1)	.920	(23.4)	1.680	(42.7)
16	17	.732	(18.6)	1.480	(37.6)	.980	(24.9)	1.740	(44.2)
18	19	.748	(19.0)	1.490	(37.8)	1.020	(25.9)	1.760	(44.7)
20	21	.773	(19.6)	1.510	(38.4)	1.080	(27.4)	1.820	(46.2)
22	23	.800	(20.3)	1.550	(39.4)	1.140	(29.0)	1.900	(48.3)
24	25	.823	(20.9)	1.580	(40.1)	1.200	(30.5)	1.970	(50.0)

TABLE IV: CABLE ENTRY

Dash No.	K		L Max	Cable Range		
	±.030	±(.8)		Min	Max	
10	.220	(5.6)	1.000 (25.4)	.130 (3.3)	.250 (6.4)	
12	.310	(7.9)	1.250 (31.8)	.250 (6.4)	.380 (9.7)	
14	.440	(11.2)	1.340 (34.0)	.310 (7.9)	.440 (11.2)	
16	.560	(14.2)	1.470 (37.3)	.375 (9.5)	.630 (16.0)	
18	.630	(16.0)	1.560 (39.6)	.560 (14.2)	.690 (17.5)	
20	.750	(19.1)	1.620 (41.1)	.630 (16.0)	.750 (19.1)	
22	.880	(22.4)	1.750 (44.5)	.750 (19.1)	.880 (22.4)	
24	1.000	(25.4)	1.870 (47.5)	.880 (22.4)	1.000 (25.4)	
28	1.060	(26.9)	1.970 (50.0)	1.000 (25.4)	1.130 (28.7)	
32	1.190	(30.2)	2.090 (53.1)	1.130 (28.7)	1.250 (31.8)	

1. When maximum cable entry (page 21) is exceeded, Style 2 will be supplied. Dimensions E, F, G, and H will not apply. Please consult factory.
2. Metric dimensions (mm) are indicated in parentheses.
3. Consult factory for shorter lengths on straight backshells.
4. Backshells supplied with 600-052-* band, see Glenair Series 600 Tool Catalog for installation.