

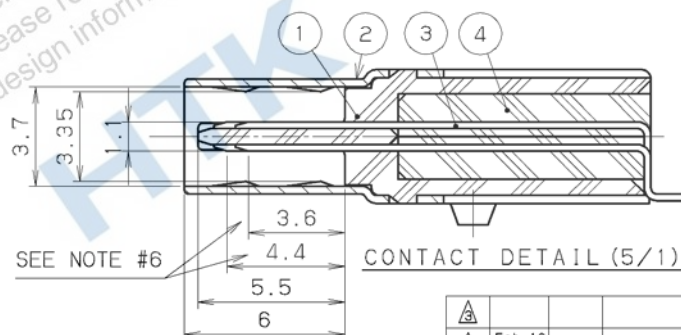
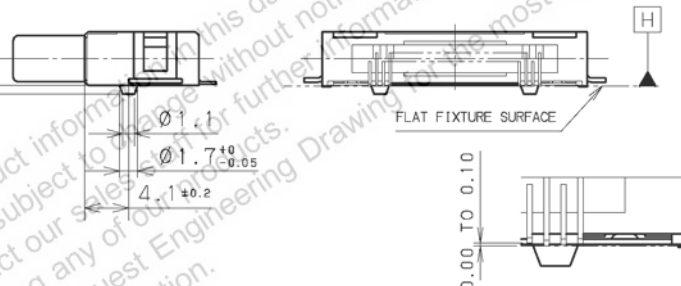

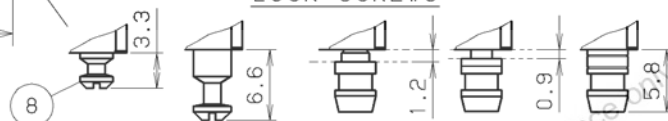


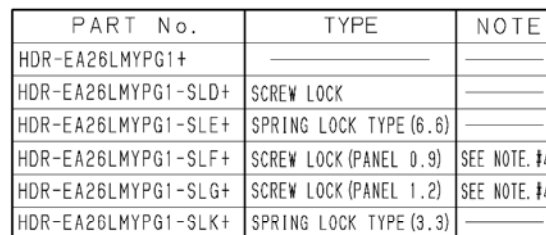

CONTACT LENGTH	CONTACT POS. NO.
4 . 4 mm	POS. #1, 13, 14, 2
3 . 6 mm	OTHERS

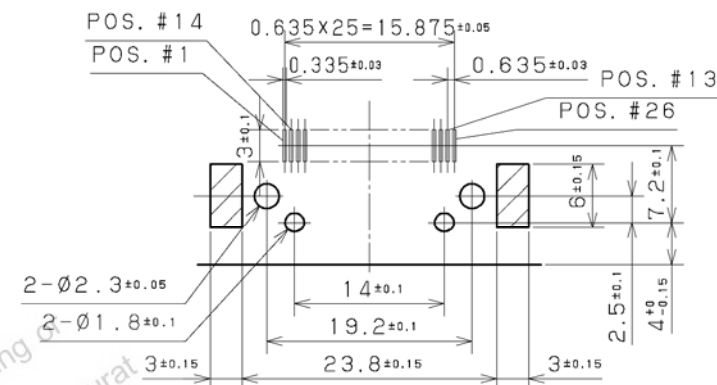

1. CONTACT PLATING
MATING AREA
0.76 MICRO METERS MINIMUM GOLD PLATING
TERMINATION AREA
0.05 MICRO METERS MINIMUM GOLD PLATING

UNDERPLATING: NICKEL PLATING 1 μ m

2.MATING CONNECTOR
HDR-E26F () G () +

3. SPECIFICATION
RATED CURRENT 0.5A
RATED VOLTAGE 125V AC (r. m. s.)

4.TWO LOCK SCREWS ARE
SUPPLIED WITH A CONNECTOR.

5. THE DIMENSION OF PIN TAIL'S LOWER SURFACE TO DETUM 'H' SURFACE: 0.00 TO 0.10.

THE CONECTOR SHOULD BE ON FLAT FIXTURE SURFACE
WHEN THE DIMENSIONS ARE MEASURED.

	8	LOCK SCREW	STEEL	2	NICKEL PLATING	M2X0.4
	7	HEX. NUT	STEEL	2	NICKEL PLATING	M2X0.4
	6	EARTH PLATE	PHOSPHOR BRONZE	2	NICKEL PLATING	————
	5	SQR. NUT	BRASS	2	NICKEL PLATING	M2X0.4
	4	INSULATOR B	PPS (GF)	1	————	UL94V-0 BLACK COLOR
	3	CONTACT	PHOSPHOR BRONZE	26	SEE NOTE #2	————
N	2	SHFLI	STFEL	1	NICKEL PLATING	————
	1	INSULATOR A	PPS (GF)	1	————	UL94V-0 BLACK COLOR

				3	CONTACT	PHOSPHOR BRONZE	26	SEE NOTE #2	BLACK COLOR
	Feb.16 2012	Y. K	Added P/N	2	SHFLI	STFII	1	NICKEL PLATING	_____
	Nov.30 2005	Y. K	Revise	1	INSULATOR A	PPS (GF)	1	_____	UL94V-0 BLACK COLOR
LTR. DATE	BY	REV. DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE	
DATE Feb. 23, 2004	SCALE 2/1	UNIT mm (INCH)	3RD. A. P	HONDA TSUSHIN KOGYO CO., LTD.					
APP. DATE&REV.									
DR.	DE.	CHK.	CHK.	APP.	NAME	0.8mm SPACING 26POS. RIGHTANGLE MALE CONNECTOR			
Y. KATO	Y. KATO	_____	M. KASAHARA	H. EBIHARA	PART NO.	HDR-EA26LMYPG1-() + REV. 2			